

CS2

EIM 3

**TUBES**

**TUBES**

**TUBES**

**TUBES**

**TUBES**

**TUBES**

**TUBES**

**TUBES**

**TUBES**


# **EIMAC**

**1960**

# **QUICK REFERENCE CATALOG**

**AND WHAT'S NEW  
WITH THE ELECTRON**

**EITEL-McCULLOUGH, INC.**

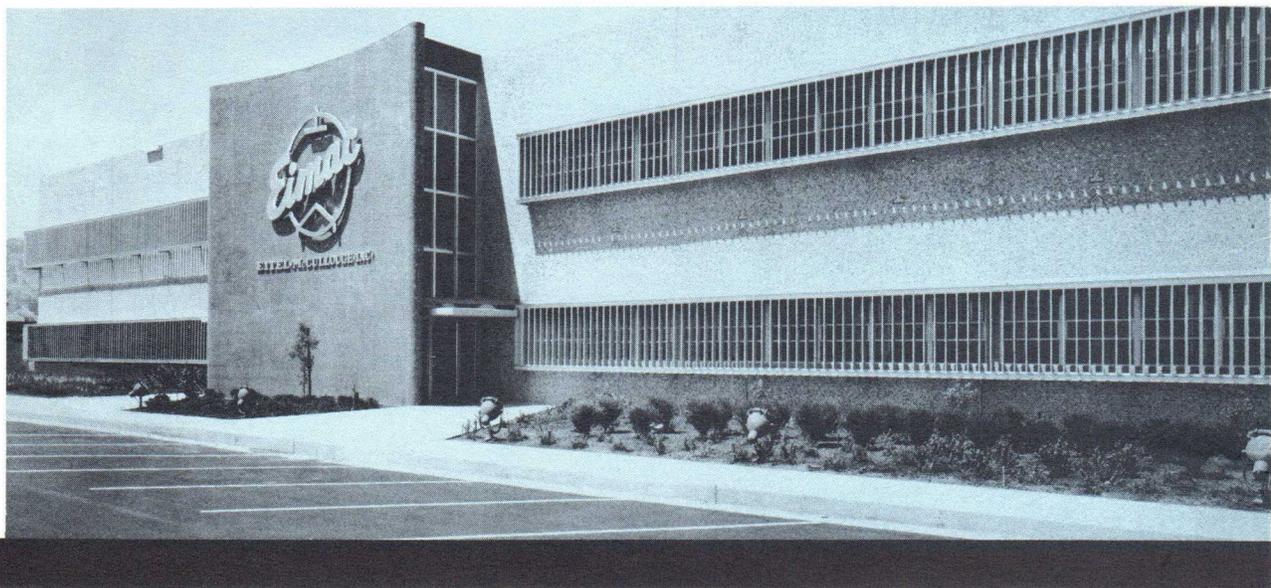

THE CORPORATE HEADQUARTERS of Eitel-McCullough, Inc. at San Carlos, California is the most modern electron-tube manufacturing facility in the United States.



# 1960 QUICK REFERENCE CATALOG

## Contents

	PAGE
EIMAC FIELD ENGINEERS AND WORLD-WIDE REPRESENTATION . . . . .	2
GENERAL INFORMATION . . . . .	3
TUBE INDEX . . . . .	4
REFLEX KLYSTRONS . . . . .	5
POWER AMPLIFIER KLYSTRONS . . . . .	8
RECTIFIERS . . . . .	15
TRIODES . . . . .	18
TETRODES AND PENTODE . . . . .	27
PULSE MODULATORS . . . . .	34
OTHER PRODUCTS . . . . .	35
DEVELOPMENTAL TUBES . . . . .	40

## The Company

More than twenty-five years of electronics experience has made Eitel-McCullough, Inc. the world's largest manufacturer of transmitting tubes for communications, electronic systems and industrial processes.

Over 2500 people at Eimac have approximately 500,000 square feet of floor space in locations throughout the world. Eitel-McCullough, Inc. has plants in San Carlos, San Bruno and Belmont, California and Salt Lake City, Utah. An Eimac subsidiary is located in Geneva, Illinois and a marketing subsidiary operates in Geneva, Switzerland.

From pioneering early pre-World War II radar applications to providing pulsed power for radar contact with the planet Venus and the sun — Eimac is demonstrating its ability to meet the challenge of modern electronics. Eimac produces over 100 commercial tube types and many accessories.



## EIMAC FIELD ENGINEERS

**1—RUSH S. DRAKE ASSOC.**  
1806 Bush Place  
Seattle 44, Washington  
Phone: EAst 3-8545

**2—JAMES S. HEATON CO.**  
413 Lathrop Street  
Redwood City, California  
Phone: EMerson 9-5278

**3—HERB BECKER COMPANY**  
1140 Crenshaw Blvd.  
Los Angeles, California  
Phone: WEBster 1-1257

**4—JIM HASTIN SALES CO.**  
P. O. Box 2098  
Honolulu 5, Hawaii  
Phone: 511-755

**5—McLOUD & RAYMOND CO.**  
5403 East Evans  
Denver 22, Colorado  
Phone: SKYline 6-1589 & 6-1580

**6—H. M. RICHARDSON & CO.**  
9 East 22nd Street  
Minneapolis 4, Minnesota  
Phone: FEderal 6-4078

**7—MAURY E. BETTIS CO.  
CLYDE H. SCHRYVER ASSOC.**  
406 W. 34th Street  
Kansas City 11, Missouri  
Phone: LOfan 1-0772

**8—TEX-O-KOMA SALES CO.**  
P. O. Box 747  
Grand Prairie, Texas  
Phone: DALLAS—ANDrew 2-0866  
Ft. Worth—CREstview 4-4530

**9—DICK BELLEW SALES CO.**  
314 Melrose  
El Dorado, Arkansas  
Phone: UNion 3-8325

**10—J. E. JOYNER & ASSOC.**  
2258 Cascade Rd., S. W.  
P. O. Box 10821, Stn. A  
Atlanta 10, Georgia  
Phone: PLaza 5-4336

**11—ROYAL J. HIGGINS CO.**  
10105 S. Western Ave.  
Chicago 43, Illinois  
Phone: BEverly 3-7388

**12—TECHNICAL ASSOC., INC.**  
4475 Lander Road  
Chagrin Falls, Ohio  
Phone: TErrace 1-9884

**13—JAMES R. EBERLY CO.**  
Bank of Commerce Bldg.  
1700 "K" Street, N. W.  
Washington 6, D. C.  
Phone: DIstrict 7-2667

**14—FRED F. BARTLETT & CO.**  
18 West Avenue  
P. O. Box 126  
Wayne, Pennsylvania  
Phone: MURray 8-7325 & 8-7326

**15—ADOLPH SCHWARTZ**  
15 Exchange Place  
Jersey City 2, New Jersey  
Phone: New Jersey:  
DElaware 3-2424  
New York: WOrth 4-1757

**16—COAKLEY SALES OFFICE**  
148 Needham Street  
Newton Highlands  
Boston 61, Massachusetts  
Phone: DEcatur 2-4800

Canada:  
**17—R. D. B. SHEPPARD**  
2036 Prince Charles Road  
Ottawa 3, Ontario, Canada  
Phone: PArkway 2-7152

DAYTON, OHIO, AREA  
GOVERNMENT ONLY:  
**ROBERT G. SIFF & ASSOC. INC.**  
22 Oxford Avenue  
Dayton 7, Ohio  
Phone: CREstview 8-4779  
ROME, N.Y. AREA

ROME, N. Y. AREA  
GOVERNMENT ONLY:  
**T. "PHIL" RIZZUTI**  
R.F.D. #1  
Blossvale, New York  
Phone: Rome 2646R1

## WORLD-WIDE REPRESENTATION

**EITEL-McCULLOUGH, S. A.**  
Rue Du Mont Blanc No. 26  
Geneva, Switzerland  
Phone: (022) 32 68 14  
Cable: EIMACSA

Export Department:  
**EITEL-McCULLOUGH, INC.**  
San Carlos, California  
Phone: LYtell 1-1451  
Cable: EIMAC SAN CARLOS

### CANADA

**R. D. B. SHEPPARD**  
2036 Prince Charles Rd.  
Ottawa 3, Ont., Canada  
Phone: PArkway 2-7152

### WEST GERMANY & AUSTRIA

**HENLEY & CO., INC.**  
J. K. Leahy  
202 E. 44th St.  
New York 17, N. Y.  
Phone: YUkon 6-5544

**MUNICH OFFICE**  
**SCHNEIDER, HENLEY & CO.,**  
G.M.B.H.  
Eric G. Adler  
12A Maximiliansplatz  
Munich 2, Germany  
Cable: ELEKTRADIMEX, MUNICH

### ITALY

**DOTT, GIGI GALLO GORGATTI**  
Via Morigi 11  
Milan, Italy  
Cable: GIGALGO, MILAN

### SWEDEN

**K.L.N. TRADING CO., LTD. A.B.**  
K. L. Nyman  
70 Sveavagen  
Stockholm, Sweden  
Cable: KAYELEN, STOCKHOLM

### FRANCE & LUXEMBOURG

**SASSOON SOPHER, INC.**  
M. Goffen  
630 Fifth Ave.  
New York 20, N. Y.  
Phone: Clrcle 6-0670

**PARIS OFFICE**  
**RADIO EQUIPEMENTS**  
Sassoon Sopher  
65 Rue De Richelieu  
Paris 2, France  
Cable: SASSOPHER, PARIS

### SWITZERLAND

**TRACO TRADING CO., LTD.**  
Dr. Hans Caspar, Jr.  
Jenatschstr. 1  
Zurich, Switzerland  
Cable: TRACOTRADING, ZURICH

### NETHERLANDS

**UNI-OFFICE, LTD.**  
W. Van't Wout  
J. Neeter  
P. O. Box 1122  
Rotterdam, Netherlands  
Cable: UNIOFFICE, ROTTERDAM

### ISRAEL

**THE ISTELECO AGENCY**  
Robert H. Avigor  
P. O. Box 3159  
Tel-Aviv, Israel

### CHILE

**LUIS M. DESMARAS**  
Claudio Propper  
Casilla 761  
Santiago, Chile  
Cable: DESMARAS, SANTIAGO

### PORTUGAL

**EST. HEROLD, S.A.R.L.**  
Apartado 244  
Lisbon, Portugal  
Cable: HEROLD, LISBON

### NORWAY

**HANS H. SCHIVE**  
Per Torp  
P. O. Box 43, Skoyen  
Oslo, Norway  
Cable: HANSCHIVE, OSLO

### BELGIUM

**INELCO, S.A.**  
S. Goemaere  
20-24 Rue De L'Hopital  
Brussels, Belgium  
Cable: INELCOBEL, BRUSSELS

### JAPAN

**SEKI & CO., LTD.**  
K. Seki  
No. 1 Kanda Higashi  
Fukudacho, Chiyoda-Ku  
Tokyo, Japan  
Cable: KYOSEKI, TOKYO

### GREECE

**K. KARAYANNIS & CO.**  
K. Karayannis  
Karitsi Square  
Athens, Greece  
Cable: RAKAR, ATHENS

### MEXICO

**GENERAL ELECTRIC S.A. De. C.V.**  
V. Misrachi  
Apartado 403  
MEXICO D.F., MEXICO

### AUSTRALIA & NEW ZEALAND

**GEO. H. SAMPLE & SON**  
(ELECTRONICS) PTY. LTD.  
17-19 Anthony St.  
Melbourne C. 1, Australia  
Cable: ELPMAS, MELBOURNE

### NEW ZEALAND OFFICE

**GEO. H. SAMPLE & SON**  
(N.Z.) PTY. LTD.  
A. Marr  
P. O. Box 3250  
Auckland, New Zealand

### THAILAND

**G. SIMON RADIO CO.**  
J. Eddie  
30 Patpong Ave., Suriwong  
Bangkok, Thailand  
Cable: SIMONCO, BANGKOK

### DENMARK

**DITZ SCHWEITZER**  
P. Beck  
Bredgade 37  
Copenhagen, Denmark  
Cable: SCHWEITZER, COPENHAGEN

### COLOMBIA

**L. ENRIQUE CORREA**  
Apartado Aereo 4085  
Bogota, Colombia  
Cable: LUENCOR, BOGOTA

### CUBA

**CARIBBEAN ELECTRONICS**  
W. Richard  
Calle L #353, Vedado  
Havana, Cuba  
Cable: RADRICH, HAVANA

### YUGOSLAVIA

**BELRAM ELECTRONICS**  
S. Zveny  
43 Ch. De Charleroi  
Brussels, Belgium  
Cable: BELRAMEL, BRUSSELS

### INDIA

**MOTWANE PRIVATE LTD.**  
S. Motwane  
P. O. Box 1312  
Bombay, India  
Cable: EASLEKTRIK, BOMBAY

### INDONESIA

**NELSON BROWN AGENCIES, LTD.**  
H. D. Caro  
P. O. Box 827/DAK  
Djakarta, Indonesia  
Cable: NELSON, DJAKARTA

### URUGUAY

**M. GONZALEZ DEL RIO**  
Casilla De Correo 228  
Montevideo, Uruguay  
Cable: MALGON, MONTEVIDEO

### FINLAND

**INTO O/Y**  
11 Meritullinkatu  
Helsinki, Finland  
Cable: INTO, HELSINKI

# GENERAL INFORMATION

## APPLICATION ENGINEERING SERVICES

Application engineers will help you personally with equipment design and tube application. New tube operating techniques are continually being explored, tested, and proved by Eimac engineers — whose combined knowledge and experience are at your service. For engineering assistance and application bulletins without obligation, contact:

EITEL-McCULLOUGH, INC.  
Application Engineering  
301 Industrial Way  
San Carlos, California

OR

For local service, contact your nearest field engineering office listed on opposite page.

## CONVENIENT ORDERING SERVICES

Eitel-McCullough, Inc. offers three convenient ordering services to meet your particular requirements: Distributors, Field Engineers, and our Factory Customer Services Department.

**DISTRIBUTORS**  
Located in every major city.

Carry all standard products (with exception of power and reflex klystrons, X-tubes, and associated hardware).

**FIELD ENGINEERS**  
See list on opposite page.

Provide assistance in selection and application of all standard products, special product development, and requests for quotation.

**FACTORY**  
Customer Services Department  
301 Industrial Way  
San Carlos, California

Provides information concerning product availability, shipping instructions, and supporting services.

ALL EIMAC CATALOG ITEMS ARE AVAILABLE FOR IMMEDIATE DELIVERY

◆ Indicates new item

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# TUBE INDEX

## REFLEX KLYSTRONS

1K015CA	Page 6
1K015CG	Page 6
1K20KA	Page 6
1K20XD	Page 6
1K20XK	Page 6
1K20XS	Page 6
1K75CH	Page 7
1K75CK	Page 7
1K125CA	Page 7
1K125CB	Page 7
1K125CC	Page 7

## AMPLIFIER KLYSTRONS

3K2500LX	Page 9
3K2500SG	Page 9
3K3000LQ	Page 9
3K50,000LA	Page 10
3K50,000LF	Page 10
3K50,000LQ	Page 10
3KM3000LA	Page 10
3KM4000LT	Page 11
3KM50,000PA	Page 11
4K50,000LQ	Page 11
4KM3000LQ	Page 12
4KM3000LR	Page 12
4KM50,000LA	Page 12
4KM50,000LQ	Page 13
4KM50,000SG	Page 13
4KM170,000LA	Page 13
4KMP10,000LF	Page 14
6K50,000LQ	Page 14
X626	Page 14

## RECTIFIERS

2-01C	Page 15
2-25A	Page 15
2-50A	Page 15
2-150A	Page 16
2-240A	Page 16
2-450A	Page 16
2-2000A	Page 16
2X1000A	Page 16
2X3000F	Page 17
250R	Page 17
8020 (100R)	Page 17
KY21A	Page 17
RX21A	Page 17

## TRIODES

2C39A	Page 19
2C39WA	Page 19
3C24	Page 19
3CPN10A5	Page 19
3CX100A5	Page 20
3W5000A1	Page 20
3W5000F1	Page 20
3W5000A3	Page 20
3W5000F3	Page 21
3X100A5	Page 21
3X2500A3	Page 21
3X2500F3	Page 21
3X3000A1	Page 22
3X3000F1	Page 22
25T	Page 22
35T	Page 22
75TH	Page 23
75TL	Page 23
100TH	Page 23
100TL	Page 23
250TH	Page 24
250TL	Page 24
304TH	Page 24
304TL	Page 24
450TH	Page 25
450TL	Page 25
592/3-200A3	Page 25
750TL	Page 25
1000T	Page 26
1500T	Page 26
2000T	Page 26

## TETRODES

4-65A	Page 28
4-125A	Page 28
4-250A	Page 28
4-400A	Page 28
4-1000A	Page 28
4CN15A	Page 29
4CW2000A	Page 29
4CW10,000A	Page 29
4CX125C	Page 29
4CX250BA	Page 30
4CX250B	Page 30
4CX250F	Page 30
4CX250K	Page 30
4CX250M	Page 31
4CX300A	Page 31

## TETRODES

4CX1000A	Page 31
4CX5000A	Page 31
4W300B	Page 32
4W20,000A	Page 32
4X150A	Page 32
4X150D	Page 32
4X150G	Page 33
4X250B	Page 33
4X500A	Page 33
7580	Page 30

## PENTODE

4E27A/5-125B	Page 33
--------------	---------

## PULSE MODULATORS

4PR60A	Page 34
4PR400A	Page 34
4PR1000A	Page 34
6C21	Page 34

## SOCKETS

### AIR SYSTEM SOCKETS

SK-300	Page 36
SK-400	Page 36
SK-500	Page 36
SK-600	Page 36
SK-602	Page 36
SK-610	Page 36
SK-620	Page 36
SK-630	Page 36
SK-640	Page 36
SK-650	Page 37
SK-655	Page 37
SK-700	Page 37
SK-710	Page 37
SK-740	Page 37
SK-760	Page 37
SK-770	Page 37
SK-800A	Page 37
SK-810	Page 37
SK-900	Page 37

## CHIMNEYS

SK-306	Page 36
SK-406	Page 36
SK-506	Page 36
SK-606	Page 36
SK-626	Page 36
SK-636	Page 36
SK-806	Page 37
SK-906	Page 37

## VACUUM SWITCHES

VS-2	Page 38
VS-4	Page 38
VS-5	Page 38
VS-6	Page 38
12v. Coil	Page 38
24v. Coil	Page 38

## HEAT DISSIPATING CONNECTORS

HR-1	Page 38
HR-2	Page 38
HR-3	Page 38
HR-4	Page 38
HR-5	Page 38
HR-6	Page 38
HR-7	Page 38
HR-8	Page 38
HR-9	Page 38
HR-10	Page 38

## WATER LOADS

WL-110	Page 39
WL-120	Page 39
WL-130	Page 39
WL-140	Page 39
WL-200	Page 39

## IONIZATION GAUGE

100 IG	Page 38
--------	---------

## DIFFUSION PUMP

H V-1	Page 38
-------	---------

## TUBE EXTRACTOR

SK-604A	Page 37
---------	---------

## DEVELOPMENTAL

### REFLEX KLYSTRON

Y222	Page 42
------	---------

### AMPLIFIER KLYSTRONS

X563K	Page 41
X563L	Page 41
X563M	Page 41
X602K	Page 41
X632	Page 41
X700	Page 41
X768	Page 42

### DIODE

Y179	Page 42
------	---------

### TRIODES

X685C	Page 42
X762	Page 42
X779	Page 42

### TETRODES

X578G	Page 43
X578H	Page 43
X578J	Page 43
X593V	Page 43
X651H	Page 44
Y169	Page 44
Y210	Page 44

### PULSE MODULATORS

X629	Page 44
X643F	Page 45
Y158	Page 45

### TRAVELING WAVE TUBE

X778	Page 45
------	---------

### VOLTAGE TUNEABLE MAGNETRON

X-747	Page 45
-------	---------


FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.

# REFLEX KLYSTRONS


Eitel-McCullough, Inc. manufactures small, rugged ceramic-and-metal reflex klystrons which provide reliable, long-life operation at microwave frequencies. Eimac is continuing an extensive program of development on new microwave devices and modification of existing products to maintain exceptional frequency stability under severe conditions of heat—humidity—high altitude—shock—vibration—acceleration. Achieving this exceptional stability, Eimac reflex klystrons incorporate advanced stacked-ceramic construction with “dual cavity” design. This permits internal electrodes to be supported on rigid concentric cones—allowing the entire vacuum assembly to be furnace-brazed into a single ruggedized structure.

An extensive amount of electronics work is being done throughout the world in the microwave frequencies to improve existing radar and communication systems. Reflex klystrons are used as local oscillators in microwave receivers and as drivers in microwave transmitters. Eimac reflex klystrons are used in power radar, airborne altimeters, electronic test equipment, and missile and aircraft guidance systems.

◆ Indicates new item

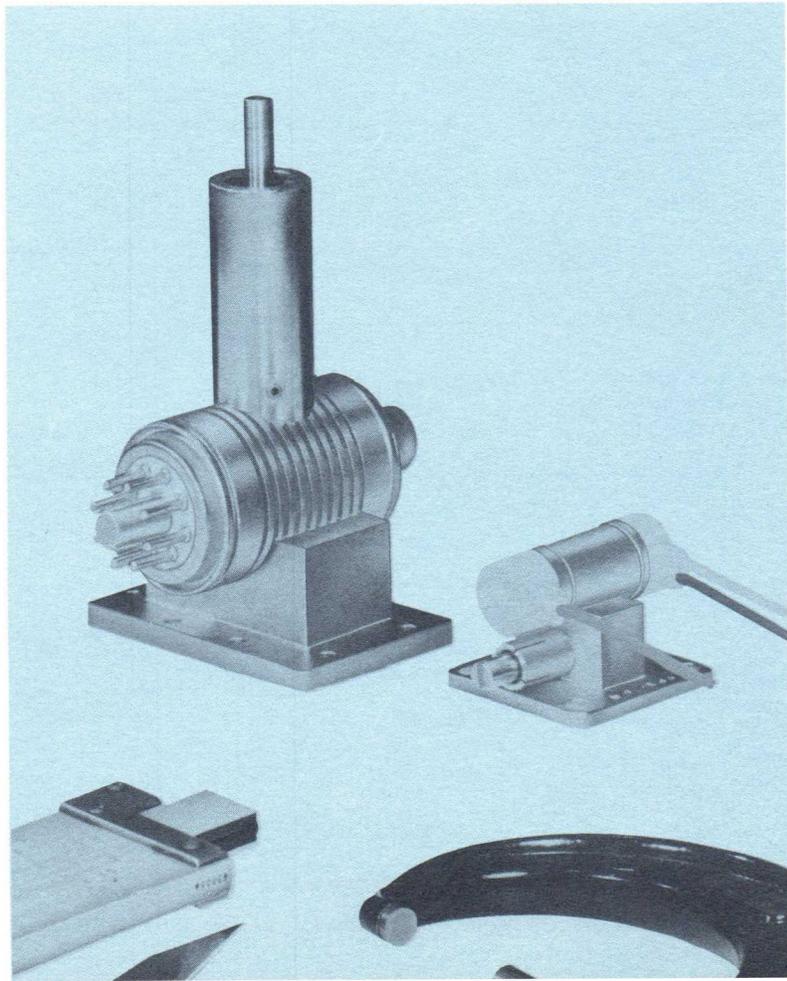

# REFLEX KLYSTRONS

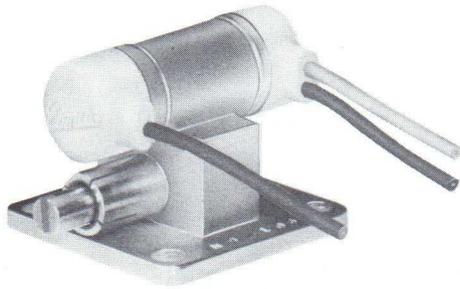

## 1K20 series

The 1K20-series tubes are ceramic and metal, ruggedized reflex klystrons designed for local oscillator service under conditions of severe environmental extremes. Electrical connections to these tubes are completed with encapsulated flexible leads. A single screw-tuner, in a brazed-on external cavity provides a tuning rate of approximately 150 Mc per turn, with extremely low microphonics.

### TUNING RANGE AND TYPICAL OUTPUT

<b>1K20XS</b>	<b>8.5 - 9.2 kMc at 75 mW</b>
<b>1K20XK</b>	<b>9.2 - 10.0 kMc at 75 mW</b>
<b>1K20XD</b>	<b>10.0 - 10.7 kMc at 75 mW</b>
<b>1K20KA</b>	<b>10.7 - 11.5 kMc at 40 mW</b>

### COOLING

Conduction and Radiation

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	
Heater: Voltage	6.3 volts
Current	0.7 to 1.0 ampere
RF Output	RG-52/U waveguide
Net Weight	4 ounces

#### Maximum Over-All Dimensions:

	<b>XS/XK</b>	<b>XD/KA</b>	
Length	2.3	2.3	inches
Width	1.6	1.6	inches
Depth	1.4	1.3	inches

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient	150 °C
Maximum Altitude	No limit
Maximum Shock (11 ms)	40 g
Maximum Vibration (20-2000 cps)	10 g

### MAXIMUM RATINGS


RESONATOR VOLTAGE	350 Vdc
CATHODE CURRENT	55 mAdc
REPELLER VOLTAGE	-500 Vdc

### TYPICAL OPERATION

	<b>1K20XS</b>		<b>1K20XK</b>		<b>1K20XD</b>		<b>1K20KA</b>
Mode	5¾	5¾	5¾	5¾	5¾	5¾	5¾
Frequency	8.85	8.85	9.60	9.60	10.35	10.35	11.10 kMc
Resonator Voltage	300	350	300	350	300	350	350 Vdc
Output Power	70	90	70	90	50	75	40 mW
Cathode Current	40	50	40	50	45	55	50 mAdc
Repeller Voltage	-150	-135	-170	-155	-165	-150	... Vdc
3-db Bandwidth	40	40	35	35	30	30	... Mc
Modulation Sens.	1.5	1.5	1.7	1.7	2.0	2.0	... Mc/v

## 1K015CA

The ceramic and metal 1K015CA is a ruggedized, internal-cavity reflex klystron designed for local oscillator service. Encapsulated leads provide electrical connections. A single screw-tuner provides a tuning rate of 100 Mc per turn and allows tuner cycling in excess of 100 cycles.



<b>TUNING RANGE</b>	<b>5.35 to 5.95 kMc</b>
<b>MINIMUM OUTPUT</b>	<b>70 mW</b>
<b>COOLING</b>	<b>Conduction</b>

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient	100 °C
Maximum Altitude	No limit
Maximum Shock (11 ms.)	40 g
Maximum Vibration (20 to 2000 cps)	10 g

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	
Heater: Voltage	6.3 volts
Current	0.7 to 1.0 ampere
RF Output	Miniature coaxial jack
Net Weight	4.2 ounces
Maximum Depth	1.19 inches
Maximum Width	1.32 inches
Maximum Length	3.38 inches

### MAXIMUM RATINGS

RESONATOR VOLTAGE	350 Vdc
CATHODE CURRENT	55 mAdc
REPELLER VOLTAGE	-500 Vdc

### TYPICAL OPERATION

	<b>4¾</b>	<b>3¾</b>
Mode	4¾	3¾
Frequency	5650	5650 Mc
Resonator Voltage	300	350 Vdc
Output Power	35	130 mW
Cathode Current	35	49 mAdc
Repeller Voltage	-135	-240 Vdc
3-db Bandwidth	45	45 Mc
Modulation Sens.	1600	900 kc/v

## 1K015CG

The 1K015CG is a waveguide-output version of the 1K015CA with identical electrical characteristics. It is a metal and ceramic, ruggedized, internal-cavity reflex klystron designed for local oscillator service.



<b>TUNING RANGE</b>	<b>5.35 to 5.95 kMc</b>
<b>MINIMUM OUTPUT</b>	<b>70 mW</b>
<b>COOLING</b>	<b>Conduction</b>

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient	100 °C
Maximum Altitude	No limit
Maximum Shock (11 ms.)	40 g
Maximum Vibration (20 to 2000 cps)	10 g

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	
Heater: Voltage	6.3 volts
Current	0.7 to 1.0 ampere
RF Output	RG-50/U waveguide
Net Weight	17.5 ounces
Maximum Depth	1.63 inches
Maximum Width	3.13 inches
Maximum Length	5.25 inches

### MAXIMUM RATINGS


RESONATOR VOLTAGE	350 Vdc
CATHODE CURRENT	55 mAdc
REPELLER VOLTAGE	-500 Vdc

### TYPICAL OPERATION

	<b>4¾</b>	<b>3¾</b>
Mode	4¾	3¾
Frequency	5650	5650 Mc
Resonator Voltage	300	350 Vdc
Output Power	35	130 mW
Cathode Current	35	49 mAdc
Repeller Voltage	-135	-240 Vdc
3-db Bandwidth	45	45 Mc
Modulation Sens.	1600	900 kc/v

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# REFLEX KLYSTRONS



## 1K75CH

The 1K75CH is a low-noise, ceramic and metal, ruggedized, reflex klystron designed for fixed-frequency altimeter applications. When the resonator and insulated TNC connector are grounded, the tube may be operated at any altitude without flashover.

**FREQUENCY** 4300 ± 50 Mc  
**MINIMUM OUTPUT** 1.0 W  
**COOLING** Conduction

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient 125 °C  
 Maximum Altitude 40,000 ft  
 Maximum Shock (11 ms.) 15 g  
 Max. Vibration (20 to 2000 cps) 10 g

### CHARACTERISTICS


Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.3 volts  
 Current 1.0 to 1.5 amperes  
 RF Output Insulated TNC jack  
 Net Weight 8.5 ounces  
 Maximum Depth 1.13 inches  
 Maximum Width 2.50 inches  
 Maximum Length 2.51 inches

### MAXIMUM RATINGS

RESONATOR VOLTAGE 850 Vdc  
 CATHODE CURRENT 100 mAcd  
 REPELLER VOLTAGE -500 Vdc

### TYPICAL OPERATION

Mode 4¾ 2¾  
 Frequency 4300 4300 Mc  
 Resonator Voltage 550 750 Vdc  
 Output Power 0.25 1.0 W  
 Cathode Current 35 60 mAcd  
 Repeller Voltage -150 -350 Vdc  
 3-db Bandwidth 60 30 Mc  
 Modulation Sens. 1600 160 kc/v



## 1K75CK

The 1K75CK is a low-noise, ceramic and metal, ruggedized, reflex klystron designed for fixed-frequency altimeter service. Encapsulated, flexible leads allow operation of this tube at any altitude without flashover.

**FREQUENCY** 4300 ± 50 Mc  
**MINIMUM OUTPUT** 1.0 W  
**COOLING** Conduction

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient 125 °C  
 Maximum Altitude No limit  
 Maximum Shock (11 ms.) 30 g  
 Max. Vibration (20 to 2000 cps) 10 g

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.3 volts  
 Current 1.0 to 1.5 amperes  
 RF Output Half-height waveguide  
 Net Weight 8.0 ounces  
 Maximum Depth 1.19 inches  
 Maximum Width 2.73 inches  
 Maximum Length 2.76 inches

### MAXIMUM RATINGS

RESONATOR VOLTAGE 850 Vdc  
 CATHODE CURRENT 100 mAcd  
 REPELLER VOLTAGE -500 Vdc

### TYPICAL OPERATION

Mode 4¾ 2¾  
 Frequency 4300 4300 Mc  
 Resonator Voltage 550 750 Vdc  
 Output Power 0.25 1.0 W  
 Cathode Current 35 60 mAcd  
 Repeller Voltage -150 -350 Vdc  
 3-db Bandwidth 60 30 Mc  
 Modulation Sens. 1600 160 kc/v

## 1K125CA

The 1K125CA is a low-noise ceramic and metal reflex klystron designed for use as an oscillator or transmitter in communication service. Tuner cycling in excess of 1000 cycles, with a tuning rate of 100 Mc per turn, is provided by the bellows-coupled, dielectric tuner.

**TUNING RANGE** 3.7 to 4.4 kMc  
**MINIMUM OUTPUT** 1.25 W  
**COOLING** Forced Air

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient 50 °C  
 Maximum Altitude 10,000 ft  
 Maximum Shock (1 ms.)\* 80 g  
 Max. Vibration (120 sec. 40 cps)\* 10 g

### CHARACTERISTICS


Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.3 volts  
 Current 1.0 to 1.5 amperes  
 RF Output RG-49/U waveguide  
 Net Weight 18 ounces  
 Maximum Depth 3.3 inches  
 Maximum Width 2.8 inches  
 Maximum Length 4.4 inches  
 Air-Flow Rate (50°C.) 10 cfm

### MAXIMUM RATINGS

RESONATOR VOLTAGE 1000 Vdc  
 CATHODE CURRENT 110 mAcd  
 REPELLER VOLTAGE -750 Vdc

### TYPICAL OPERATION

Mode 2¾  
 Frequency 4050 4700 Mc  
 Resonator Voltage 1000 Vdc  
 Output Power 1.6 W  
 Cathode Current 75 mAcd  
 Repeller Voltage -275 Vdc  
 3-db Bandwidth 28 Mc  
 Modulation Sens. 310 kc/v

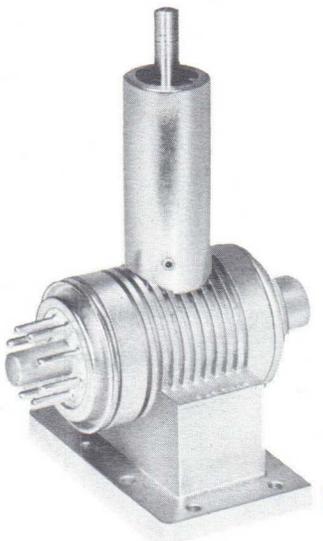

## 1K125CB

The 1K125CB is a low-noise, ceramic and metal, reflex klystron designed for use as an oscillator or transmitter in communication service. Tuner cycling in excess of 1000 cycles, with a tuning rate of 100 Mc per turn, is provided by the bellows-coupled, dielectric tuner.

**TUNING RANGE** 4.4 to 5.0 kMc  
**MINIMUM OUTPUT** 1.8 W  
**COOLING** Forced Air

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient 50 °C  
 Maximum Altitude 10,000 ft  
 Maximum Shock (1 ms.)\* 80 g  
 Max. Vibration (120 sec. 40 cps)\* 10 g

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.3 volts  
 Current 1.0 to 1.5 amperes  
 RF Output RG-49/U waveguide  
 Net Weight 18 ounces  
 Maximum Depth 2.8 inches  
 Maximum Width 3.3 inches  
 Maximum Length 4.4 inches  
 Air-Flow Rate (50°C.) 10 cfm

### MAXIMUM RATINGS

RESONATOR VOLTAGE 1000 Vdc  
 CATHODE CURRENT 110 mAcd  
 REPELLER VOLTAGE -750 Vdc

### TYPICAL OPERATION

Mode 3¾ 2¾  
 Frequency 4700 4700 Mc  
 Resonator Voltage 800 1000 Vdc  
 Output Power 0.77 2.5 W  
 Cathode Current 55 75 mAcd  
 Repeller Voltage -130 -345 Vdc  
 3-db Bandwidth 50 32 Mc  
 Modulation Sens. 700 290 kc/v

## 1K125CC

The 1K125CC is designed for use as an oscillator or transmitter under environmental conditions encountered in Military mobile service. The electrical characteristics of the 1K125CC are similar to those of the 1K125CB. However, the use of stricter process control provides closer modulation sensitivity and repeller voltage limits, and higher output power.

**TUNING RANGE** 4.4 to 5.0 kMc  
**MINIMUM OUTPUT** 2.0 W  
**COOLING** Forced Air

### MAXIMUM OPERATING ENVIRONMENT

Maximum Ambient 50 °C  
 Maximum Altitude 10,000 ft  
 Maximum Shock (1 ms.)\* 80 g  
 Max. Vibration (120 sec. 40 cps)\* 10 g

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.3 volts  
 Current 1.0 to 1.5 amperes  
 RF Output RG-49/U Waveguide  
 Net Weight 18 ounces  
 Maximum Depth 2.8 inches  
 Maximum Width 3.3 inches  
 Maximum Length 4.4 inches  
 Air Flow Rate (50°C.) 10 cfm

### MAXIMUM RATINGS

RESONATOR VOLTAGE 1000 Vdc  
 CATHODE CURRENT 110 mAcd  
 REPELLER VOLTAGE -750 Vdc

### TYPICAL OPERATION

Mode 3¾ 2¾  
 Frequency 4700 4700 Mc  
 Resonator Voltage 800 1000 Vdc  
 Output Power 0.80 2.6 W  
 Cathode Current 55 75 mAcd  
 Repeller Voltage -130 -345 Vdc  
 3-db Bandwidth 50 35 Mc  
 Modulation Sens. 700 325 kc/v

EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.

# POWER KLYSTRONS


Eitel-McCullough, Inc. produces a complete line of ceramic-and-metal, magnetically-focused power-amplifier klystrons. Cavities of most Eimac power-amplifier klystrons are completed by tuning boxes outside the vacuum envelope, permitting wide tuning ranges and making it possible to load the cavities externally for broad-band applications requiring linearity that is not achievable by stagger tuning. Since all tuning is accomplished outside the vacuum envelope, no mechanical damage to the tube can result from repeated tuning operations. Eimac power klystrons employ adjustable output load couplers which make possible optimum loading at each frequency over a wide range of load VSWR. An amplifier circuit assembly consisting of a magnetic frame, focusing coils, tuning boxes, socket, and accessory components is available for each Eimac power klystron.

An outstanding feature of Eimac klystrons is the achievement of high-power gains without sacrificing beam efficiency. Under narrow band CW conditions, driving powers of one to five watts are sufficient for output powers up to 75,000 watts, and typical efficiencies range from 35 to 45 percent. The excellent life experienced with Eimac klystrons is a direct result of the clean, simple tube construction permitted by the external cavity design. A klystron life of over 20,000 hours is not uncommon as a result of the conservatively designed cathode structure and the high processing temperatures permitted by the ceramic-and-metal construction.

Many of the Eimac power klystrons incorporate the modulating anode—an original Eimac development, which provides an excellent means for amplitude or pulse modulating the amplifier without changing the beam voltage. The modulating anode also serves as a very effective protective device—either in conjunction with external circuits or when grounded through a resistor.

The ability of these tubes to conveniently and reliably generate high power at ultra-high frequencies and above has led to their widespread use throughout the world in such applications as tropo-scatter communications systems—television broadcasting—high-power radar—particle accelerators—satellite tracking stations—missile control transmitters—processing of foods, chemicals, petroleum.

◆ Indicates new item

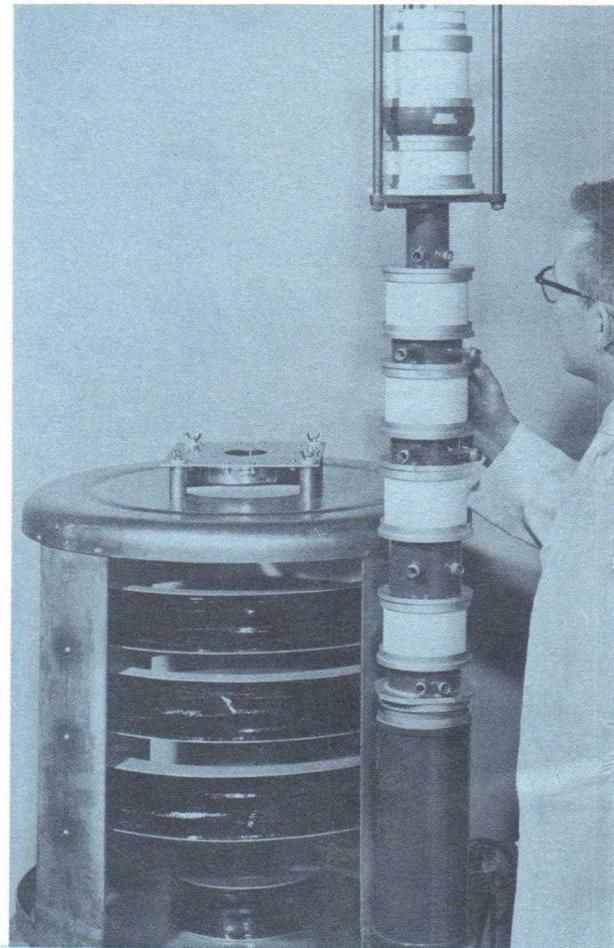

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# POWER KLYSTRONS



## 3K2500LX

The Eimac 3K2500LX is a ceramic and metal, three-cavity, magnetically focused power amplifier klystron. Its resonant cavities are completed by tuning boxes external to the tube. This design permits a wide tuning range, and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-114, has been designed for use with this tube.

<b>FREQUENCY RANGE</b>	<b>980 - 1200 Mc</b>
<b>MINIMUM CW OUTPUT POWER</b>	<b>1000 watts</b>
<b>TYPICAL POWER GAIN</b>	<b>25 db</b>

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	7000 Vdc
D-C FOCUS ELECTRODE VOLTAGE	-100 Vdc
D-C BODY CURRENT	60 mAdc
COLLECTOR DISSIPATION	2500 W
D-C BEAM CURRENT	600 mAdc

### CHARACTERISTICS

Cathode: Unipotential, Oxide Coated	Maximum Dimensions (Tube):
Heater:	Length 26.19 inches
Voltage 7.5 volts	Diameter 5.15 inches
Current 5.8 amperes	Maximum Dimensions (Tube and Circuit Assembly):
RF Connections:	Length 27.22 inches
Input 50-ohm Type N	Diameter 22.22 inches
Output 1 5/8 inch 50-ohm line	Cooling Forced air
Net Weight (Tube): 22 pounds	
Net Weight (Circuit Assembly): 267 pounds	

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	1000	1000 Mc
Output Power	830	1320 W
Drive Power	2	2 W

D-C Beam Voltage	6000	7000 Vdc
D-C Beam Current	350	455 mAdc



## 3K2500SG

The Eimac 3K2500SG is a ceramic and metal, three-cavity, magnetically focused, power-amplifier klystron. Its resonant cavities are an integral part of the tube structure and are completed and tuned outside the vacuum envelope. This design allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-113, has been designed for use with this tube to cover the specified frequency range.

<b>FREQUENCY RANGE</b>	<b>1700 - 2400 Mc</b>
<b>MINIMUM CW OUTPUT POWER</b>	<b>1000 watts</b>
<b>TYPICAL POWER GAIN</b>	<b>25 db</b>

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	7000 Vdc
D-C FOCUS ELECTRODE VOLTAGE	-100 Vdc
D-C BODY CURRENT	60 mAdc
COLLECTOR DISSIPATION	2500 W
D-C BEAM CURRENT	600 mAdc

### CHARACTERISTICS

Cathode: Unipotential, Oxide Coated	Maximum Dimensions (Tube):
Heater:	Length 17.88 inches
Voltage 7.5 volts	Diameter 7.75 inches
Current 5.5 amperes	Maximum Dimensions (Tube and Circuit Assembly):
RF Connections:	Length 18.63 inches
Input Type BNC	Diameter 24.16 inches
Output 1 5/8 inch 50-ohm line	Cooling Forced air
Net Weight (Tube): 28 pounds	
Net Weight (Circuit Assembly): 115 pounds	

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	1700	2400 Mc
Output Power	1350	1300 W
Drive Power	4	4 W

D-C Beam Voltage	7000	7000 Vdc
D-C Beam Current	570	570 mAdc



## 3K3000LQ

The Eimac 3K3000LQ is a ceramic and metal, three-cavity, magnetically focused, power-amplifier klystron. Its resonant cavities are completed by tuning boxes external to the tube. This design permits a wide tuning range, and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly (H-124) has been designed for use with this tube to cover the frequency range of 720 to 985 Mc. It permits operation of the klystron as a narrow-band amplifier or, with external resistive loads, as a wide-band amplifier.

<b>FREQUENCY RANGE</b>	<b>610 - 985 Mc</b>
<b>MINIMUM CW OUTPUT POWER</b>	<b>2000 watts</b>
<b>TYPICAL POWER GAIN</b>	<b>25 db</b>

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	10,000 Vdc
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
D-C BODY CURRENT	75 mAdc
COLLECTOR DISSIPATION	3000 W
D-C BEAM CURRENT	750 mAdc

### CHARACTERISTICS

Cathode: Unipotential, Oxide Coated	Maximum Dimensions (Tube):
Heater:	Length 34.44 inches
Voltage 5.0 volts	Diameter 5.13 inches
Current 32 amperes	Maximum Dimensions (Tube and Circuit Assembly):
RF Connections:	Length 38.0 inches
Input 50-ohm Type N	Diameter 22.84 inches
Output 1 5/8 inch 50-ohm line	Cooling Forced air
Net Weight (Tube): 32 pounds	
Net Weight (Circuit Assembly): 215 pounds	

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	850	850 Mc
Output Power	1050	2400 W
Drive Power	4	10 W

D-C Beam Voltage	7000	9000 Vdc
D-C Beam Current	375	600 mAdc

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# POWER KLYSTRONS



## 3K50,000LA 3K50,000LF 3K50,000LQ

The Eimac 3K50,000LA, 3K50,000LF, and 3K50,000LQ are ceramic and metal, three-cavity, magnetically focused, power-amplifier klystrons. In television visual service they will each provide more than 12 kilowatts of peak synchronizing output power with a power gain of 20 db. The resonant cavities of these tubes are completed by external tuning boxes. This design permits wide tuning ranges and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assemblies, Catalog Numbers H-108 and H-111 have been designed for the 3K50,000LA and 3K50,000LQ respectively.

### FREQUENCY RANGES

3K50,000LA	400 - 600 Mc
3K50,000LF	570 - 720 Mc
3K50,000LQ	720 - 985 Mc

### MINIMUM CW OUTPUT POWER

10 kilowatts

### TYPICAL POWER GAIN

25 db

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	20 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
D-C BODY CURRENT	150 mAcd
COLLECTOR DISSIPATION	50 kW
D-C BEAM CURRENT	2.5 Adc

### TYPICAL OPERATION

#### TV VISUAL CW

Drive Power	55	17 W
Output Power	12*	10.7 kW
D-C Beam Voltage	17.2	15 kVdc
D-C Beam Current	2.15	1.65 Adc

\*Peak synchronizing level.

### CHARACTERISTICS

Cathode: Unipotential, Bombardment Heated	Mechanical Data—			
		"LA"	"LF"	"LQ"
Heater: Voltage Current	8.0 volts 40 amperes	53	51	48 pounds
Bombarder: Voltage Current	2100 volts 0.66 ampere	491	393	..... pounds
RF Connections: Input Output	50-ohm Type N 3 1/8 inch 50-ohm line	Max. Tube Dimensions:		
		Length	52.87	48.37
		Diameter	5.13	5.13
		Max. Dimensions (Tube and Circuit Assembly):		
		Length	55.87	51.38
		Diameter	26.69	27.44
		Cooling Water and forced air		

## 3KM3000LA

The Eimac 3KM3000LA is a ceramic and metal, three-cavity, magnetically focused, power-amplifier klystron. It employs the Eimac modulating anode, which provides an effective means of amplitude or pulse modulating the output power, without changing beam voltage.

All tuning for this tube is accomplished outside the vacuum envelope. This allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-120, has been designed for use with this tube.

### FREQUENCY RANGE

385 - 585 Mc

### MINIMUM CW OUTPUT POWER

2 kilowatts

### TYPICAL POWER GAIN

30 db

### MAXIMUM RATINGS

CW D-C BEAM VOLTAGE	10 kVdc
PULSE D-C BEAM VOLTAGE	20 kVdc
PULSE MOD. ANODE VOLTAGE	20 kv
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
D-C BODY CURRENT	75 mAcd
COLLECTOR DISSIPATION	3 kW
AVE. D-C BEAM CURRENT	750 mAcd
PULSE D-C BEAM CURRENT	2.8 a

### TYPICAL OPERATION

	PULSE	CW
RF Frequency	425	520 Mc
Output Power	12.25	2.3 kW
Drive Power	10	2 W
D-C Beam Voltage	15	9 kVdc
D-C Beam Current	0.105	0.590 Adc
Peak Mod. Anode Voltage	15	..... kVac
Peak Beam Current	1.74	..... a

### CHARACTERISTICS

Cathode: Unipotential, Oxide Coated	Net Weight (Circuit Assembly):	538 pounds	
Heater: Voltage Current	5 volts 32 amperes	Maximum Dimensions (Tube):	
RF Connections: Input Output	50-ohm Type N 1 5/8 inch 50-ohm line	Length	44.99 inches
Net Weight (Tube):	46 pounds	Diameter	5.13 inches
		Maximum Dimensions (Tube and Circuit Assembly):	
		Length	50.75 inches
		Diameter	26.31 inches
		Cooling	Forced air



EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.

# POWER KLYSTRONS



## 3KM4000LT

The Eimac 3KM4000LT is a ceramic and metal, three-cavity, magnetically focused, power-amplifier klystron designed primarily for pulse applications. It employs the Eimac modulating anode, which provides an effective means of amplitude or pulse modulating the output power, without changing the beam voltage.

The external-cavity design allows a wide tuning range, and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-116, has been designed for use with this tube.

**FREQUENCY RANGE** 960 - 1215 Mc  
**MINIMUM PULSE OUTPUT POWER** 40 kilowatts  
**TYPICAL POWER GAIN** 32 db

### CHARACTERISTICS

Cathode: Unipotential, Oxide Coated	Maximum Dimensions (Tube):
Heater:	Length 30.47 inches
Voltage 7.5 volts	Diameter 5.13 inches
Current 5.5 amperes	Maximum Dimensions
RF Connections:	(Tube and Circuit Assembly):
Input 50-ohm Type N	Length 30.47 inches
Output 1 5/8 inch 50-ohm line	Diameter 19.0 inches
Net Weight (Tube): 21 pounds	Cooling Forced air
Net Weight (Circuit Assembly): 240 pounds	

### MAXIMUM RATINGS

CW D-C BEAM VOLTAGE	8 kVdc
PULSE D-C BEAM VOLTAGE	28 kVdc
PULSE MOD. ANODE VOLTAGE	14 kv
D-C FOCUS ELECTRODE VOLTAGE	-400 Vdc
D-C BODY CURRENT	20 mAdc
COLLECTOR DISSIPATION	4 kW
PEAK BEAM CURRENT	6.0 a
AVE. D-C BEAM CURRENT	500 mAdc

### TYPICAL OPERATION (Narrow-Band Pulse Amplifier)

Peak Output Power	31.5	38.2 kw
Peak Drive Power	15	15 w
D-C Beam Voltage	24	26 kVdc
Ave. D-C Beam Current	119	133 mAdc
Peak Mod. Anode Voltage	12	13 kv
Peak Beam Current	3.75	4.2 a



## 3KM50,000PA

The Eimac 3KM50,000PA is a ceramic and metal, three-cavity, magnetically focused, power-amplifier klystron. It employs the Eimac modulating anode, which provides an effective means of amplitude or pulse modulating the output power without changing beam voltage.

All tuning for this tube is accomplished outside the vacuum envelope. This allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-126, has been designed for use with this tube.

**FREQUENCY RANGE** 225 - 400 Mc  
**MINIMUM CW OUTPUT POWER** 20 kilowatts  
**TYPICAL POWER GAIN** 35 db

### CHARACTERISTICS

Cathode: EMA, Unipotential	Net Weight (Circuit Assembly): 1940 pounds
Heater:	Maximum Dimensions (Tube):
Voltage 7.5 volts	Length 81.13 inches
Current 40 amperes	Diameter 8.13 inches
Getter:	Maximum Dimensions
Voltage 1.75 volts	(Tube and Circuit Assembly):
Current 30 amperes	Length 88.75 inches
RF Connections:	Diameter 51.13 inches
Input 50-ohm Type N	Cooling Liquid and Forced air
Output 6 1/8 inch 50-ohm line	
Net Weight (Tube): 163 pounds	

### MAXIMUM RATINGS

	CW	AM
D-C BEAM VOLTAGE	23	30 kVdc
MODULATING ANODE: D-C VOLTAGE	23	17 kVdc
PEAK VOLTAGE SWING	....	±13 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-500	-500 Vdc
D-C BODY CURRENT	250	250 mAdc
GETTER CURRENT (RMS OR D-C)	60	60 A
COLLECTOR DISSIPATION	60	60 kW
D-C BEAM CURRENT	2.75	2.0 Adc

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	300	400 Mc
Output Power	24.4	23.1 kW
Drive Power	5	5 W
D-C Beam Voltage	23	23 kVdc
D-C Beam Current	2.6	2.6 Adc



## 4K50,000LQ

The Eimac 4K50,000LQ is a ceramic and metal, four-cavity, magnetically focused, power-amplifier klystron. Its resonant cavities are completed through the cylindrical ceramic windows of the klystron and all tuning is accomplished outside the vacuum envelope. This design permits a wide tuning range and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-101A, has been designed for use with this tube to cover the frequency range of 720 to 985 Mc.

**FREQUENCY RANGE** 600 - 985 Mc  
**MINIMUM CW OUTPUT POWER** 10 kilowatts  
**TYPICAL POWER GAIN** 55 db

### CHARACTERISTICS

Cathode: Unipotential, Bombardment Heated	Net Weight (Circuit Assembly): 797 pounds
Filament:	Maximum Dimensions (Tube):
Voltage 8.0 volts	Length 46.32 inches
Current 40 amperes	Diameter 5.13 inches
Bombarder:	Maximum Dimensions
Voltage 2250 volts	(Tube and Circuit Assembly):
Current 0.71 amperes	Length 50.38 inches
RF Connections:	Diameter 27.63 inches
Input 50-ohm Type N	Cooling Water and Forced air
Output 3 1/8 inch 50-ohm line	
Net Weight (Tube): 53 pounds	

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	20 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
D-C BODY CURRENT	100 mVdc
COLLECTOR DISSIPATION	50 kW
D-C BEAM CURRENT	2.5 Adc

### TYPICAL OPERATION (CW Amplifier)

RF Frequency	900 Mc
Output Power	11.2 kW
Drive Power	0.02 W
D-C Beam Voltage	16 kVdc
D-C Beam Current	1.59 Adc

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# POWER KLYSTRONS



## 4KM3000LQ

The 4KM3000LQ is a ceramic and metal, four-gap, external-cavity, magnetically focused power-amplifier klystron employing the Eimac Modulating Anode.

This klystron is designed to operate with collector depression, thereby realizing an improvement in efficiency.

The Eimac Klystron Amplifier Circuit Assembly (H-118) has been designed for use with this tube to cover the specified frequency range. It permits operation of the klystron as a narrow-band amplifier or, with external resistive loads, as a wide-band amplifier.

**FREQUENCY RANGE**  
**MINIMUM CW OUTPUT POWER**  
**TYPICAL POWER GAIN**

**710 - 985 Mc**  
**2 kilowatts**  
**30 db**

### MAXIMUM RATINGS

D-C BEAM VOLTAGE 10 kVdc  
 D-C FOCUS ELECTRODE VOLTAGE -500 Vdc  
 D-C BEAM CURRENT 750 mAdc  
 COLLECTOR DISSIPATION 3 kW

### TYPICAL OPERATION (Narrow-Band, CW Amplifier, Collector Depressed)

RF Frequency 900 Mc  
 Output Power 2150 W  
 Drive Power 4.0 W  
 D-C Beam Voltage 9000 Vdc  
 D-C Beam Current 580 mAdc  
 D-C Collector Voltage (from Cathode) 4500 kVdc  
 D-C Collector Current 210 mAdc  
 D-C Body Current 370 mAdc  
 Efficiency 50 %

### CHARACTERISTICS

Cathode: Oxide Coated, Unipotential  
 Heater: Voltage 5.0 volts  
 Current 33.0 amperes  
 RF Connections: Input 50-ohm Type N  
 Cavity Loading 50-ohm Type N  
 Output 1 3/8 inch 50-ohm line  
 Net Weight: Klystron 49 pounds  
 Circuit Assembly 327 pounds  
 Maximum Dimensions (Klystron): Length 45.2 inches  
 Diameter 5.4 inches  
 Maximum Dimensions (Klystron in Circuit Assembly): Length 48.5 inches  
 Diameter 22.8 inches  
 Cooling Forced air



## 4KM3000LR

The Eimac 4KM3000LR is a ceramic and metal, four-gap, external-cavity, magnetically focused, power-amplifier klystron designed for communication service. An Eimac Modulating Anode is employed, providing an effective means of amplitude or pulse modulating the output power without changing the beam voltage.

The Eimac Klystron Amplifier Circuit Assembly (H-125) has been designed for use with this tube to cover the specified frequency range. It permits operation of the klystron as a narrow-band amplifier or, with external resistive loads, as a wide-band amplifier.

**FREQUENCY RANGE**  
**MINIMUM CW OUTPUT POWER**  
**TYPICAL POWER GAIN**

**610 - 985 Mc**  
**2 kilowatts**  
**45 db**

### MAXIMUM RATINGS

D-C BEAM VOLTAGE\* 10 kVdc  
 D-C BEAM CURRENT\* 750 mAdc  
 D-C FOCUS ELECTRODE VOLTAGE -500 Vdc  
 D-C BODY CURRENT 75 mAdc  
 COLLECTOR DISSIPATION 3 kW

\*These ratings are not to be applied simultaneously.

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency 900 Mc  
 Output Power 2100 W  
 Drive Power 0.050 W  
 D-C Beam Voltage 8500 Vdc  
 D-C Beam Current 550 mAdc

### CHARACTERISTICS

Cathode: Oxide Coated, Unipotential  
 Heater: Voltage 5.0 volts  
 Current 31.0 amperes  
 RF Connections: Input 50-ohm Type N  
 Cavity Loading 50-ohm Type N  
 Output 1 3/8 inch 50-ohm line  
 Net Weight (Tube): 38 pounds  
 Net Weight (Circuit Assembly): 225 pounds  
 Maximum Dimensions (Tube): Length 37.5 inches  
 Diameter 5.2 inches  
 Maximum Dimensions (Tube and Circuit Assembly): Length 40.8 inches  
 Width 25.9 inches  
 Cooling Forced air



## 4KM50.000LA

The Eimac 4KM50.000LA is a ceramic and metal, four-cavity, magnetically focused, power amplifier klystron employing the Eimac Modulating Anode. The resonant cavities are completed through cylindrical ceramic windows and all tuning is accomplished outside the vacuum envelope.

The Eimac Klystron Amplifier Circuit Assembly (H-121) has been designed for use with this tube to cover the specified frequency range. It permits operation of the klystron as a narrow-band amplifier or, with external resistive loads, as a wide-band amplifier.

**FREQUENCY RANGE**  
**MINIMUM CW OUTPUT POWER**  
**TYPICAL POWER GAIN**

**400 - 630 Mc**  
**10 kilowatts**  
**55 db**

### MAXIMUM RATINGS

D-C BEAM VOLTAGE 20 kVdc  
 D-C FOCUS ELECTRODE VOLTAGE -500 Vdc  
 D-C BODY CURRENT 150 mAdc  
 COLLECTOR DISSIPATION 50 kW  
 D-C BEAM CURRENT 2.5 Adc

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency 600 Mc  
 Output Power 10 kW  
 Drive Power 0.020 W  
 D-C Beam Voltage 17 kVdc  
 D-C Beam Current 1.8 Adc

### CHARACTERISTICS

Cathode: EMA, Unipotential  
 Heater: Voltage 7.5 volts  
 Current 40 amperes  
 RF Connections: Cavity Loading 1 3/8 inch 50-ohm line  
 Input 50-ohm Type N  
 Output 3 1/8 inch 50-ohm line  
 Net Weight (Tube): 64 pounds  
 Net Weight (Circuit Assembly): 767 pounds  
 Maximum Dimensions (Tube): Length 66.5 inches  
 Diameter 5.13 inches  
 Maximum Dimensions (Tube and Circuit Assembly): Length 68.5 inches  
 Diameter 26.25 inches  
 Cooling Water and Forced air

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH  
 PRODUCT DESIGN AND EXPERIMENTATION.**

# POWER KLYSTRONS



## 4KM50,000LQ

The Eimac 4KM50,000LQ is a ceramic and metal, four-cavity, magnetically focused, power-amplifier klystron employing the Eimac Modulating Anode.

The external cavity design permits a wide tuning range and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly (H-122) has been designed for use with this tube to cover the specified frequency range. It permits operation of the klystron as a narrow-band amplifier or, with external resistive loads, as a wide-band amplifier.

### FREQUENCY RANGE

610 - 985 Mc

### MINIMUM CW OUTPUT POWER

10 kilowatts

### TYPICAL POWER GAIN

55 db

### MAXIMUM RATINGS


D-C BEAM VOLTAGE	20 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
D-C BODY CURRENT	100 mAdc
COLLECTOR DISSIPATION	50 kW
D-C BEAM CURRENT	2.5 Adc

### CHARACTERISTICS

Cathode: EMA, Unipotential	Net Weight (Circuit Assembly):	349 pounds
Heater:		
Voltage	7.5 volts	
Current	40 amperes	
Maximum Dimensions (Tube):		
Length	46.38 inches	
Diameter	6.32 inches	
RF Connections:		
Input	50-ohm Type N	
Cavity Loading	7/8 inch 50-ohm line	
Output	3/8 inch 50-ohm line	
Maximum Dimensions (Tube and Circuit Assembly):		
Length	51.5 inches	
Diameter	29.38 inches	
Net Weight (Tube):	55 pounds	
Cooling	Water and Forced air	

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	900 Mc
Output Power	10 kW
Drive Power	0.020 W
D-C Beam Voltage	17 kVdc
D-C Beam Current	1.8 Adc

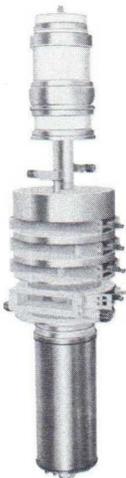

## 4KM50,000SG

The Eimac 4KM50,000SG is a ceramic and metal, four-cavity, magnetically focused, power-amplifier klystron. Its resonant cavities are an integral part of the tube structure and are completed and tuned outside the vacuum envelope.

This klystron employs the Eimac Modulating Anode, which provides an effective means of pulse or amplitude modulating the output power without changing the beam voltage.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-115 has been designed for use with this tube.

### FREQUENCY RANGE

1700 - 2400 Mc

### MINIMUM CW OUTPUT POWER

10 kilowatts

### TYPICAL POWER GAIN

40 db

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	18 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-300 Vdc
D-C BODY CURRENT	125 mAdc
COLLECTOR DISSIPATION	50 kW
D-C BEAM CURRENT	2.0 Adc

### CHARACTERISTICS

Cathode: EMA, Unipotential	Net Weight (Tube):	70 pounds
Heater:	Net Weight (Circuit Assembly):	210 pounds
Voltage	6.3 volts	
Current	37.5 amperes	
Maximum Dimensions (Tube):		
Length	34.43 inches	
Diameter	12.32 inches	
Getter:		
Voltage	1.75 volts	
Current	30 amperes	
Maximum Dimensions (Tube and Circuit Assembly):		
Length	38.13 inches	
Diameter	27.75 inches	
RF Connections:		
Input	Type BNC	
Output	RG-105/u Waveguide	
Cooling	Forced air and water	

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	1700 Mc
Output Power	12 kW
Drive Power	0.5 W
D-C Beam Voltage	17 kVdc
D-C Beam Current	1.9 Adc
D-C Mod. Anode Voltage	17 kVdc



## 4KM170,000LA

The Eimac 4KM170,000LA is a ceramic and metal, four-cavity, magnetically focused, power-amplifier klystron employing the Eimac Modulating Anode.

All tuning for this tube is accomplished outside the vacuum envelope. This allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-128, has been designed for use with this tube.

### FREQUENCY RANGE

300 - 500 Mc

### MINIMUM CW OUTPUT POWER

75 kilowatts

### TYPICAL POWER GAIN

45 db

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	35 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-1000 Vdc
D-C BODY CURRENT	250 mAdc
COLLECTOR DISSIPATION	170 kW
D-C BEAM CURRENT	5.5 Adc

### CHARACTERISTICS

Cathode: EMA, Unipotential	Net Weight (Circuit Assembly):	1792 pounds
Heater:		
Voltage	11.0 volts	
Current	47.5 amperes	
Maximum Dimensions (Tube):		
Length	89.13 inches	
Diameter	9.51 inches	
RF Connections:		
Input	50-ohm Type N	
Output	6 1/8 inch 50-ohm line	
Maximum Dimensions (Tube and Circuit Assembly):		
Length	103.0 inches	
Width	38.25 inches	
Net Weight (Tube):	196 pounds	
Cooling	Water and Forced air	

### TYPICAL OPERATION (Narrow-Band, CW Amplifier)

RF Frequency	425	425 Mc
Output Power	19	77 kW
Drive Power	0.8	0.8 W
D-C Beam Voltage	20	33 kVdc
D-C Beam Current	2.0	4.8 Adc

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# POWER KLYSTRONS



## 4KMP10,000LF

The Eimac 4KMP10,000LF is a ceramic and metal, four-cavity, magnetically focused, pulse amplifier klystron. It employs the Eimac modulating anode which provides an effective means of pulse modulating the output power without changing the beam voltage.

The external cavity design allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly, Catalog Number H-127, has been designed for use with this tube.

**FREQUENCY RANGE** 570 - 630 Mc  
**MINIMUM PULSE OUTPUT POWER** 400 kilowatts  
**TYPICAL POWER GAIN** 55 db

### CHARACTERISTICS

Cathode: EMA, Unipotential	Maximum Dimensions (Tube):
Heater:	Length 84.25 inches
Voltage 12.0 volts	Diameter 6.88 inches
Current 25.0 amperes	
RF Connections:	Maximum Dimensions
Input 50-ohm Type N	(Tube and Circuit Assembly):
Output Waveguide WR-1500	Length 85.56 inches
	Width 24.0 inches
Net Weight (Tube): 140 pounds	Cooling Forced air

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	70 kVdc
D-C MOD. ANODE VOLTAGE	44 kVdc
D-C BODY CURRENT	15 mAAdc
COLLECTOR DISSIPATION	10 kW
PEAK D-C BEAM CURRENT	22.5 a
AVERAGE D-C BEAM CURRENT	300 mAAdc

### TYPICAL OPERATION (Narrow-Band, Pulse Amplifier)

RF Frequency	630 Mc
Peak Output Power	400 kw
Average Output Power	4 kW
Peak Drive Power	0.8 w
D-C Beam Voltage	61.5 kVdc
D-C Beam Current (Average)	150 mAAdc
Peak Mod. Anode Voltage Swing	30.7 kv
Peak Beam Current	15.0 a



## 6K50,000LQ

The Eimac 6K50,000LQ is a six-cavity, magnetically focused, cascade amplifier klystron designed primarily for CW high-power, broad-band communication service.

The resonant cavities of the 6K50,000LQ are completed by tuning boxes external to the tube. This design permits a wide tuning range and allows repeated tuning operations without damage to the vacuum seals.

**FREQUENCY RANGE** 720 - 980 Mc  
**BROAD-BAND CW OUTPUT POWER** 6 kilowatts  
**BROAD-BAND POWER GAIN** 30 db

### CHARACTERISTICS

Cathode: Unipotential, Bombardment	RF Connections:
Heated	Input 50-ohm Type N
Filament:	Output 3 1/8 inch 50-ohm line
Voltage 8.0 volts	Net Weight (Tube): 63 pounds
Current 40 amperes	Maximum Dimensions (Tube):
Bombarder:	Length 57.0 inches
Voltage 2280 volts	Diameter 5.13 inches
Current 0.70 amperes	Cooling Water and Forced air

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	20 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
D-C BODY CURRENT	100 mAAdc
COLLECTOR DISSIPATION	50 kW
D-C BEAM CURRENT	2.5 Adc

### TYPICAL OPERATION (Broad-Band, CW Amplifier)

RF Frequency	880	880 Mc
Output Power	6.4	9.0 kW
Drive Power	1.7	2.3 W
D-C Beam Voltage	17	19.5 kVdc
D-C Beam Current	1.88	2.30 Adc
3 db Band Width	20	15 Mc



## X-626

The Eimac X-626 is a three-cavity, ceramic and metal, magnetically focused power-amplifier klystron specifically designed for pulse service requiring high average power capabilities. This tube employs the Eimac Modulating Anode, which provides a convenient means of pulse modulating the output power without changing the beam voltage. The external cavity design permits a wide tuning range.

The Eimac Klystron Amplifier Circuit Assembly (H-123) has been designed for use with this tube to cover the specified frequency range.

**FREQUENCY RANGE** 400 - 450 Mc  
**MINIMUM PULSE OUTPUT POWER** 1.25 megawatts  
**TYPICAL POWER GAIN** 26 db

### CHARACTERISTICS

Cathode: EMA, Unipotential	Net Weight (Tube): 585 pounds
Heater:	Maximum Dimensions (Tube):
Voltage 7.5 volts	Length 117 inches
Current 95 amperes	Diameter 18 inches
Getter:	Maximum Dimensions
Voltage 13 volts	(Tube and Circuit Assembly):
Current 30 amperes	Length 120 inches
RF Connections:	Diameter 38 inches
Input 50-ohm Type HN	Cooling Liquid and Forced air
Output Adaptable to WR-2100 waveguide	

### TENTATIVE MAXIMUM PULSE RATINGS

D-C BEAM VOLTAGE	110 kVdc
PEAK MOD. ANODE VOLTAGE	66 kv
D-C BODY CURRENT	150 mAAdc
GETTER CURRENT	35 ac
COLLECTOR DISSIPATION	240 kW
AVERAGE BEAM INPUT	240 kW
PEAK BEAM INPUT	4.0 Mw
PEAK BEAM CURRENT	36.5 a

### TYPICAL OPERATION

RF Frequency	400 Mc
Peak Output Power	1.25 Mw
Peak Drive Power	3.15 kw
D-C Beam Voltage	105 kVdc
D-C Beam Current	2.07 Adc
Peak Mod. Anode Voltage	56.8 kv
Peak Beam Current	34.5 a
Duty	6 %
Pulse Width	2000 us

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# RECTIFIERS

The complete line of rectifiers produced by Eitel-McCullough, Inc. comprises more than ten distinct tube types with plate-dissipation ratings from 15 watts to 3000 watts. Most Eimac rectifiers are of the high-vacuum radiation-cooled variety. Forced-air-cooled diodes with external anodes and mercury-vapor rectifiers — with and without control electrodes — are included in the comprehensive listing.

Eimac high-vacuum rectifiers are designed for use where extreme ambient temperatures, high operating frequency, high peak inverse voltage, or the production of high-frequency transients would prevent the use of gas-filled rectifiers. Eimac rectifiers are used extensively in such applications as high-power klystron-amplifier power supplies, where reliability is essential and in industrial precipitators, where very high voltages are required.



## 2-01C

A general purpose UHF instrument diode capable of maintaining an accuracy of  $\pm 1$  db to 700 megacycles. This diode is well suited to probe mounting and is useful as an indicator at frequencies as high as 3000 megacycles. The 2-01C is cooled by convection and radiation.

### MAXIMUM RATINGS

PEAK INVERSE	1000 volts
D-C CURRENT	0.001 ampere
PLATE DISSIPATION	0.1 watt

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	
Heater:	
Voltage	5.0 volts
Current	0.31 to 0.39 ampere
Max. Seal Temp.	175 °C
Net Weight	0.2 ounces
Length	1.813 inches
Diameter	0.563 inches



## 2-25A

This small instant-heating, high-voltage diode is useful in low-power rectifier or voltage-doubler service. No forced-air cooling is required in most applications.

### MAXIMUM RATINGS

PEAK INVERSE	25,000 volts
D-C CURRENT	0.050 ampere
PEAK CURRENT	1.0 ampere
PLATE DISSIPATION	15 watts

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	6.3 volts
Current	2.75 to 3.15 amperes
Base	Small 4-pin
Socket	E. F. Johnson Co. No. 122-224 or National Co. No. XC-4 or CIR-4
Plate Connector	HR-1
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Net Weight	1.2 ounces
Length	4.38 inches
Diameter	1.44 inches

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amp)
1 - Phase Full Wave	17,700	8,000	0.1
1 - Phase Bridge	17,700	16,000	0.1
3 - Phase Full Wave	10,200 (per leg)	24,000	0.15



## 2-50A

A high-vacuum diode especially suitable for high-voltage applications where distant heating is desired. It is cooled by radiation and convection.

### MAXIMUM RATINGS

PEAK INVERSE	30,000 volts
D-C CURRENT	0.075 ampere
PEAK CURRENT	1.0 ampere
PLATE DISSIPATION	30 watts

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	5.0 volts
Current	4 amperes
Base	Medium 4-pin bayonet
Socket	E. F. Johnson Co. No. 122-224 or National Co. No. XC-4 or CIR-4
Plate Connector	HR-3
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Net Weight	2.5 ounces
Length	5.50 inches
Diameter	1.82 inches

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amp)
1 - Phase Full Wave	21,200	9,500	0.150
1 - Phase Bridge	21,200	19,000	0.150
3 - Phase Full Wave	12,200 (per leg)	28,500	0.225

APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.

# RECTIFIERS



## 2-150D

A unique high-voltage diode, actually two diodes in one envelope, suitable for use in many high-voltage rectifier and multiplier applications. The 2-150D is cooled by radiation and convection.

### MAXIMUM RATINGS

PEAK INVERSE	30,000 volts
D-C CURRENT	0.250 ampere
PEAK CURRENT	3.0 amperes
PLATE DISSIPATION	90 watts

### CHARACTERISTICS

Filament:	Thoriated tungsten
Voltage	5.0 volts
Current	11.6 to 13.2 amperes
Base	50-watt jumbo 4-pin bayonet
Socket	E. F. Johnson Co. No. 123-211 or National Co. No. XM-50
Plate Connector	HR-6
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Net Weight	9 ounces
Length	8.88 inches
Diameter	2.50 inches

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amp)
1 - Phase Full Wave	21,200	9,500	0.50
1 - Phase Bridge	21,200	19,000	0.50
3 - Phase Full Wave (per leg)	12,200	28,500	0.75



## 2-240A

A high-vacuum, high-voltage rectifier frequently employed in three-phase klystron power supplies. It is cooled by radiation and convection in most equipments.

### MAXIMUM RATINGS

PEAK INVERSE	25,000 volts
D-C CURRENT	0.50 ampere
PEAK CURRENT	4.0 amperes
PLATE DISSIPATION	150 watts

### CHARACTERISTICS

Filament:	Thoriated tungsten
Voltage	7.5 volts
Current	11.0 to 12.5 amperes
Base	50-watt jumbo 4-pin bayonet
Socket	E. F. Johnson Co. No. 123-211 or National Co. No. XM-50
Plate Connector	HR-6
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Net Weight	10 ounces
Length	11.2 inches
Diameter	3.82 inches

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amps)
1 - Phase Full Wave	18,000	-8,000	1.00
1 - Phase Bridge	18,000	16,000	1.00
3 - Phase Full Wave (per leg)	10,200	24,000	1.50



## 2-450A

A high-vacuum, high-voltage rectifier designed to replace parallel 2-240A's in three-phase power supplies. Additionally, it enjoys a higher plate dissipation capability and a higher peak-inverse voltage rating. It is cooled by radiation and convection.

### MAXIMUM RATINGS

PEAK INVERSE	30,000 volts
D-C CURRENT	1.0 ampere
PEAK CURRENT	8.0 amperes
PLATE DISSIPATION	450 watts

### CHARACTERISTICS

Filament:	Thoriated tungsten
Voltage	7.5 volts
Current	25.0 to 28.0 amperes
Base	4-pin metal shell
Socket	E. F. Johnson Co. No. 124-214
Plate Connector	HR-8
Max. Seal Temp.	225 °C
Max. Envelope Temp.	250 °C
Net Weight	2.4 pounds
Length	13.625 inches
Diameter	1.687 inches

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amps)
1 - Phase Full Wave	21,200	9,500	2.0
1 - Phase Bridge	21,200	19,000	2.0
3 - Phase Full Wave (per leg)	12,200	28,500	3.0



## 2-2000A

A large high-vacuum rectifier with a high peak-inverse voltage rating and high plate-dissipation capability. The 2-2000A is cooled by radiation and convection; no forced-air cooling is required in most installations.

### MAXIMUM RATINGS

PEAK INVERSE	75,000 volts
D-C CURRENT	0.750 ampere
PEAK CURRENT	12.0 amperes
PLATE DISSIPATION	1200 watts

### CHARACTERISTICS

Filament:	Thoriated tungsten
Voltage	10.0 volts
Current	22.0 to 25.0 amperes
Base	Special 4-pin
Socket	E. F. Johnson Co. No. 124-214
Plate Connector	HR-8
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Net Weight	3 pounds
Length	17.8 inches
Diameter	8.13 inches

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amps)
1 - Phase Full Wave	53,000	23,800	1.50
1 - Phase Bridge	53,000	47,600	1.50
3 - Phase Full Wave (per leg)	30,600	71,500	2.25



## 2X1000A

A high-vacuum diode intended for clipper-diode service; the 2X1000A may be used in circuits where the peak inverse voltage is as high as 25 kilovolts. It is cooled by forced air.

### MAXIMUM RATINGS

PEAK INVERSE	25,000 volts
D-C CURRENT	1.25 amperes
PEAK CURRENT	25.0 amperes
PLATE DISSIPATION	1000 watts

### CHARACTERISTICS

Cathode:	Oxide-coated, unipotential
Heater:	
Voltage	26.5 volts
Current	1.95 to 2.35 amperes
Base	Super jumbo 4-pin
Socket	E. F. Johnson Co. No. 122-244
Maximum Seal Temp.	150 °C
Maximum Anode-Core Temp.	200 °C
Net Weight	25.5 ounces
Length	7.188 inches
Diameter	3.125 inches

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# RECTIFIERS



## 2X3000F

A high-vacuum, forced-air cooled, external-anode diode intended for use in high-power rectifier units whenever high peak inverse voltages, extreme ambient temperatures, high operating frequency, or the production of high-frequency transients would prevent the use of mercury-vapor or gas-filled rectifier tubes.

### MAXIMUM RATINGS

PEAK INVERSE	25,000 volts
D-C CURRENT	3.0 amperes
PEAK CURRENT	20.0 amperes
PLATE DISSIPATION	3000 watts

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	7.5 volts
Current	49 to 54 amperes
Maximum Seal Temp.	150 °C
Maximum Anode-Core Temp.	150 °C
Length	8.375 inches
Diameter	4.125 inches
Net Weight	5.7 pounds

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amps)
1 - Phase Full Wave	17,700	8,000	6.0
1 - Phase Bridge	17,700	16,000	6.0
3 - Phase Full Wave (per leg)	10,200	24,000	9.0



## 250R

A high-vacuum radiation-cooled diode with instant-heating capability, the 250R is used in many high-voltage applications. No forced air is required in most cases.

### MAXIMUM RATINGS

PEAK INVERSE	60,000 volts
D-C CURRENT	0.25 ampere
PEAK CURRENT	2.5 amperes
PLATE DISSIPATION	150 watts

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	5.0 volts
Current	9.7 to 11.2 amperes
Base	50-watt jumbo 4-pin bayonet
Socket	E. F. Johnson Co. No. 123-211 or National Co. No. XM-50
Plate Connector	HR-6
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Length	10.13 inches
Diameter	3.82 inches
Net Weight	10 pounds

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amp)
1 - Phase Full Wave	42,000	19,000	0.50
1 - Phase Bridge	42,000	38,000	0.50
3 - Phase Full Wave (per leg)	24,500	57,000	0.75



## 8020

A compact high-vacuum rectifier frequently used in high-voltage and voltage-multiplier power supplies. The 8020 is instant heating and is cooled by radiation and convection.

### MAXIMUM RATINGS

PEAK INVERSE	40,000 volts
D-C CURRENT	0.100 ampere
PEAK CURRENT	1.5 amperes
PLATE DISSIPATION	60 watts

### CHARACTERISTICS

Filament: Thoriated tungsten	
Voltage	5.0 volts
Current	5.5 to 6.5 amperes
Base	Medium 4-pin bayonet
Socket	E. F. Johnson Co. No. 122-224 or National Co. No. XC-4 or CIR-4
Plate Connector	HR-8
Max. Seal Temp.	225 °C
Max. Envelope Temp.	225 °C
Length	8.0 inches
Diameter	2.32 inches
Net Weight	4 ounces

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amp)
1 - Phase Full Wave	28,000	12,500	0.2
1 - Phase Bridge	28,000	25,000	0.2
3 - Phase Full Wave (per leg)	16,300	38,000	0.3



## KY21A

A grid-controlled mercury-vapor rectifier recommended for use in power supplies or control circuits where a variable voltage at high current is desired.

### MAXIMUM RATINGS


PEAK INVERSE	11,000 volts
PEAK FORWARD	5,500 volts
D-C CURRENT	0.75 ampere
PEAK CURRENT	3.0 amperes
SUPPLY FREQUENCY	150 cps

### CHARACTERISTICS

Filament: Coated	
Voltage	2.5 volts
Current	9.2 to 10.8 amperes
Base	Medium 5-pin
Max. Cond. Mercury Temp.	20-60 °C
Length	8.0 inches
Diameter	2.25 inches
Net Weight	5 ounces

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amps)
1 - Phase Full Wave	7,800	3,500	1.50
1 - Phase Bridge	7,800	7,000	1.50
3 - Phase Full Wave (per leg)	4,500	10,500	2.25



## RX21A

A half-wave, mercury-vapor rectifier incorporating features which enable it to withstand high peak inverse voltages and to supply high d-c current. A shielded ribbon filament provides a large emission reserve and assures long life.

### MAXIMUM RATINGS

PEAK INVERSE	11,000 volts
D-C CURRENT	0.750 ampere
PEAK CURRENT	3.0 amperes
SUPPLY FREQUENCY	150 cps

### CHARACTERISTICS


Filament: Coated	
Voltage	2.5 volts
Current	9.2 to 10.8 amperes
Base	Medium 5-pin
Max. Cond. Mercury Temp.	20-60 °C
Length	8.0 inches
Diameter	2.25 inches
Net Weight	5 ounces

### MAXIMUM PERFORMANCE CAPABILITIES (Choke-Input Filter)

CIRCUIT	RMS INPUT VOLTAGE (volts)	D-C OUTPUT VOLTAGE (volts)	D-C OUTPUT CURRENT (amps)
1 - Phase Full Wave	7,800	3,500	1.50
1 - Phase Bridge	7,800	7,000	1.50
3 - Phase Full Wave (per leg)	4,500	10,500	2.25

FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.

# TRIODES

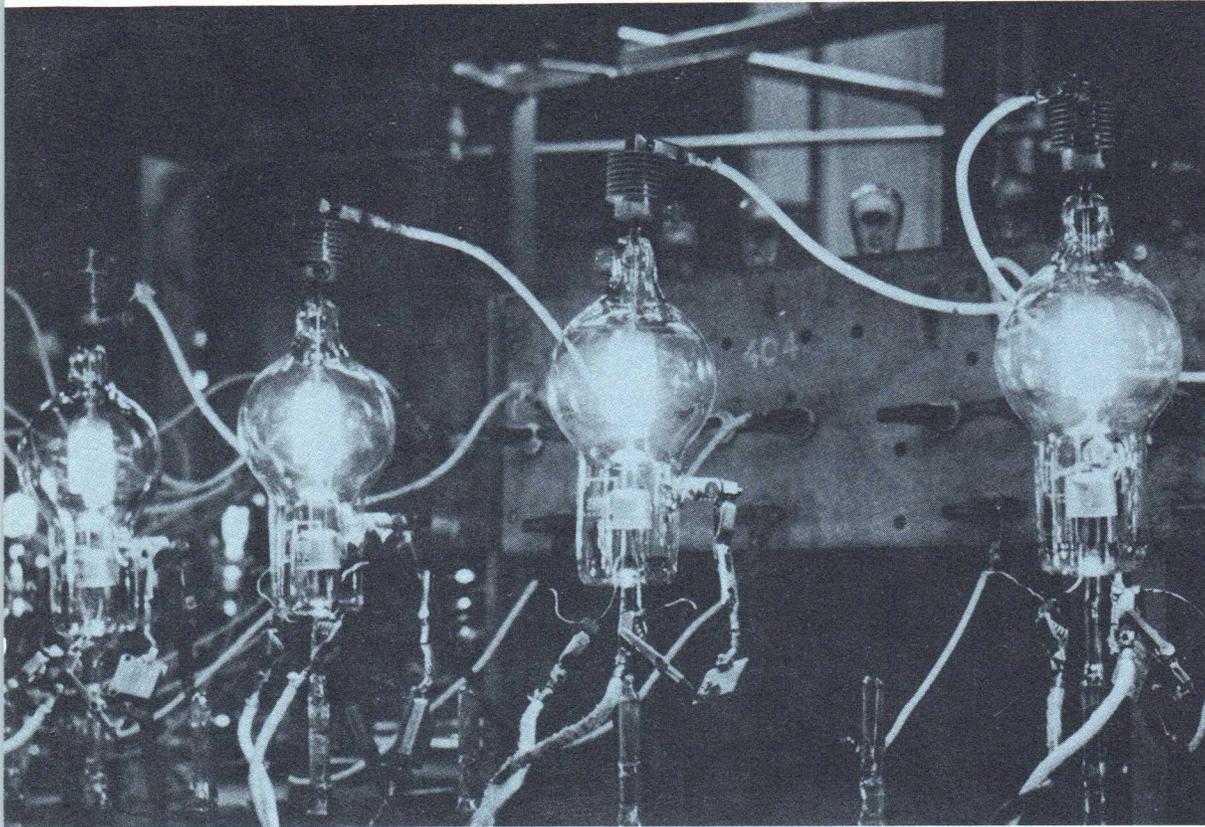

A complete line of Eimac triodes—the 25T through the 2000T—are used in fixed-station applications such as broadcast and communications transmitters and industrial oscillator service. Eimac manufactures the 2C39A - 3CX100A5 series triodes which are designed for CW and pulse applications at frequencies up to 2500 megacycles. Power triodes in the 3X2500, 3X3000, and 3X5000 series are designed for FM-amplifier service and dielectric-heating oscillator service. They are also used as broadcast and communications frequency amplifiers. In the section "Other Products," may be found a new UHF power triode — the Eimac X762.

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH  
PRODUCT DESIGN AND EXPERIMENTATION.**

# TRIODES



## 2C39A

This old favorite among the many different UHF planar triodes is still widely used as an oscillator, multiplier, or amplifier at frequencies up to 2500 megacycles. It is especially suitable for applications where performance requirements are not stringent or where economy is a major factor.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	175 °C
Voltage	6.3 volts	Maximum Anode-Core Temp.	175 °C
Current	0.95 to 1.10 amperes	Maximum Height	2.75 inches
Capacitances:		Maximum Diameter	1.27 inches
Grid-Cathode	5.60 to 7.60 uufd	Net Weight	2.5 ounces
Grid-Plate	1.86 to 2.16 uufd		
Plate-Cathode	0.035 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	1000	0.125	100	2	800	0.080	6	27
C	Plate-Modulated Radio-Frequency Power Amplifier and Oscillator	600	0.100	70	2	600	0.065	5	16



## 2C39WA


The 2C39WA is a ceramic-metal planar triode of the 2C39A family designed to meet exacting military requirements. Its physical and electrical characteristics are similar to other tubes of this family, but extended testing and a tight specification assure a premium tube with uniform performance characteristics.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	200 °C
Voltage	6.0 volts	Maximum Anode-Core Temp.	200 °C
Current	0.90 to 1.05 amperes	Maximum Height	2.75 inches
Capacitances:		Maximum Diameter	1.27 inches
Grid-Cathode	5.60 to 7.60 uufd	Net Weight	2.5 ounces
Grid-Plate	1.86 to 2.16 uufd		
Plate-Cathode	0.035 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	1000	0.125	100	2	800	0.080	6	27
C	Plate-Modulated Radio-Frequency Power Amplifier and Oscillator	600	0.100	70	2	600	0.065	5	16

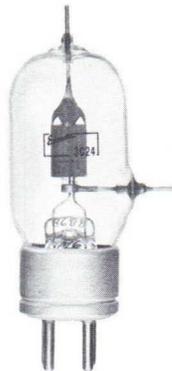

## 3C24

A general-purpose radiation-cooled triode, the 3C24 has a 25-watt plate-dissipation rating and is capable of operation at maximum ratings to 60 megacycles. No forced air is required in most applications.

**PLATE DISSIPATION** 25 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 60 megacycles  
**COOLING** Convection and Radiation

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	UX small 4-pin
Heater:		Socket	Johnson 122-224, National XC4 or CIR-4
Voltage	6.3 volts	Maximum Seal Temp.	200 °C
Current	2.8 to 3.15 amperes	Maximum Envelope Temp.	225 °C
Capacitances:		Maximum Height	4.375 inches
Grid-Filament	1.4 to 2.2 uufd	Maximum Diameter	1.438 inches
Grid-Plate	1.4 to 1.8 uufd	Net Weight	1.5 ounces
Plate-Filament	0.1 to 0.3 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.075	25	7	1250	0.130*	3.4*	112*
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.075	25	7	2000	0.063	4.0	100
C	Plate-Modulated Radio-Frequency Power Amplifier	1600	0.060	17	7	1600	0.053	3.1	68

\*Two tubes.



## 3CPN10A5

This ceramic and metal, UHF, planar triode is designed primarily for use in low-duty pulse applications. It is capable of delivering 1600 watts pulse output power at 3000 megacycles at a duty of 0.0025.

The electrical characteristics of the 3CPN10A5 are similar to those of the 3CX100A5. The nominal plate dissipation rating of 10 watts may be exceeded if sufficient additional cooling is provided to maintain the anode and seal temperatures below the specified limits.

**PLATE DISSIPATION** 10 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 3000 megacycles  
**COOLING** Conduction or Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	250 °C
Voltage	6.0 volts	Maximum Anode Temp.	250 °C
Current	0.90 to 1.05 amperes	Maximum Height	2.276 inches
Capacitances:		Maximum Diameter	1.195 inches
Grid-Cathode	5.60 to 7.00 uufd	Net Weight	1.6 ounces
Grid-Plate	1.86 to 2.15 uufd		
Plate-Cathode	0.035 uufd		

Class of Operation	Type of Service	Maximum Pulse Ratings				Typical Pulse Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Duty	Output Power (watts)
C	Plate-Pulsed Power Oscillator — 3000 megacycles	3500	3.0	10	2	3500	3.0	0.0025	1600
C	Grid Pulsed Amplifier — 3000 megacycles	1600	3.0	10	2	1600	3.0	0.0025	2

EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.

# TRIODES



## 3CX100A5

This ceramic and metal planar UHF triode is intended to supersede all tubes of the 2C39A family. Narrow mechanical tolerances plus exacting electrical testing assure tube-to-tube uniformity. The Eimac 3CX100A5 unilaterally replaces 2C39A's and other associated tube types in most equipments without requiring electrical or mechanical modification. It is also recommended for use in equipments of new design.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 megacycles  
**COOLING** Forced Air

## CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.0 volts  
 Current 0.90 to 1.05 amperes  
 Capacitances: Grid-Cathode 5.6 to 7.0 uufd  
 Grid-Plate 1.95 to 2.15 uufd  
 Plate-Cathode 0.035 uufd

Base  
 Maximum Seal Temp. 300 °C  
 Maximum Anode-Core Temp. 300 °C  
 Maximum Height 2.701 inches  
 Maximum Diameter 1.264 inches  
 Net Weight 2.5 ounces

Coaxial

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator — 500 megacycles	1000	0.125	100	2	800	0.080	6	27
C	Radio-Frequency Power Amplifier or Oscillator — 2500 megacycles	1000	0.125	100	2	900	0.090	—	15
C	Plate-Modulated Radio-Frequency Power Amplifier or Oscillator — 500 megacycles	600	0.100	70	2	600	0.065	5	16



## 3W5000A1

The 3W5000A1 is a water-cooled version of the 3X3000A1 and is useful in audio service when reserve anode dissipation is needed or when water is easily employed as a coolant. It has coaxial terminals which allow rapid tube installation or removal if quick-disconnect water fittings are also employed.

**PLATE DISSIPATION** 5000 watts  
**COOLING** Water and Forced Air

## CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 49 to 54 amperes  
 Capacitances: Grid-Filament 29 uufd  
 Grid-Plate 17 uufd  
 Plate-Filament 2.5 uufd

Base  
 Maximum Seal Temp. 150 °C  
 Maximum Height 12.562 inches  
 Maximum Diameter 3.625 inches  
 Net Weight 3.5 pounds

Coaxial

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	—	6000	2.65*	0	10,000*

\*Two tubes.



## 3W5000F1

The 3W5000F1 is a water-cooled version of the 3X3000F1. Conventional grid and filament leads allow installation without special socketing. It is designed for use in audio-amplifier applications where plate dissipation may be as high as 5000 watts or for similar service when water cooling is preferred.

**PLATE DISSIPATION** 5000 watts  
**COOLING** Water and Forced Air

## CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 49 to 54 amperes  
 Capacitances: Grid-Filament 29 uufd  
 Grid-Plate 17 uufd  
 Plate-Filament 2.5 uufd

Maximum Seal Temp. 150 °C  
 Maximum Diameter 3.625 inches  
 Net Weight 4.8 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	—	6000	2.65*	0	10,000*

\*Two tubes.



## 3W5000A3

This water-cooled version of the 3X2500A3 is offered for use in equipments where water is the preferred cooling medium or where additional plate-dissipation capability is required. It, too, is coaxial based and may be employed at maximum ratings through 75 megacycles.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 megacycles  
**COOLING** Water and Forced Air

## CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 49 to 54 amperes  
 Capacitances: Grid-Filament 36 uufd  
 Grid-Plate 20 uufd  
 Plate-Filament 1.2 uufd

Base  
 Maximum Seal Temp. 150 °C  
 Maximum Height 12.562 inches  
 Maximum Diameter 3.625 inches  
 Net Weight 3.5 pounds

Coaxial

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	5000	2.26*	59*	8000*
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier and Oscillator	6000	2.5	5000	150	6000	2.08	136	10,000
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	3350	150	5000	1.45	76	5580

\*Two tubes.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# TRIODES

## 3W5000F3

The 3W5000F3 is electrically identical to the 3X2500F3 except for plate-dissipation rating. Its water-cooled anode with 5000-watt capability makes it an ideal choice for equipments where high power must be dissipated or where it is more convenient to cool with water than forced air. Conventional grid and filament leads allow installation without special socketing.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 megacycles

**COOLING** Water and Forced Air



## CHARACTERISTICS

Filament: Thoriated tungsten		Maximum Seal Temp.	150 °C
Voltage	7.5 volts	Maximum Height	22.0 inches
Current	49 to 54 amperes	Maximum Diameter	3.625 inches
Capacitances:		Net Weight	4.8 pounds
Grid-Filament	36 uufd		
Grid-Plate	21 uufd		
Plate-Filament	1.2 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	5000	2.26*	59*	8000*
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	5000	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier and Oscillator	6000	2.5	5000	150	6000	2.08	136	10,000
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	3350	150	5000	1.45	76	5580

\*Two tubes.

## 3X100A5

This glass and metal planar triode is electrically and physically identical to the Eimac 2C39A. However, additional production tests, including the Eimac-originated cathode-evaluation test, assure higher quality and more uniform performance.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 megacycles

**COOLING** Forced Air



## CHARACTERISTICS

Cathode: Oxide-coated, unipotential		Base	Coaxial
Heater:		Maximum Seal Temp.	175 °C
Voltage	6.3 volts	Maximum Anode-Core Temp.	175 °C
Current	0.95 to 1.10 amperes	Maximum Height	2.75 inches
Capacitances:		Maximum Diameter	1.27 inches
Grid-Cathode	5.60 to 7.60 uufd	Net Weight	2.5 ounces
Grid-Plate	1.86 to 2.16 uufd		
Plate-Cathode	0.035 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	1000	0.125	100	2	800	0.080	6	27
C	Plate-Modulated Radio-Frequency Power Amplifier and Oscillator	600	0.100	70	2	600	0.065	5	16

## 3X2500A3

This popular high-power triode is widely employed in AM, FM, and TV service. Its coaxial filament and grid terminals insure low-inductance connection to these electrodes and allow operation at maximum ratings through 75 megacycles. The use of an external forced-air-cooled anode results in a compact structure with high power-handling capability.

**PLATE DISSIPATION** 2500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 megacycles

**COOLING** Forced Air



## CHARACTERISTICS

Filament: Thoriated tungsten		Base	Coaxial
Voltage	7.5 volts	Maximum Seal Temp.	150 °C
Current	49 to 54 amperes	Maximum Anode-Core Temp.	150 °C
Capacitances:		Maximum Height	8.594 inches
Grid-Filament	29.2 to 40.2 uufd	Maximum Diameter	4.156 inches
Grid-Plate	16.8 to 23.2 uufd	Net Weight	6.25 pounds
Plate-Filament	0.6 to 1.2 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	2500	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier, and Oscillator	6000	2.5	2500	150	6000	2.08	136	10,000
C	Radio-Frequency Power Amplifier Grounded-Grid 85 to 110 mc.	4000	2.0	2500	150	4000	1.85	1900	7500
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	1670	150	5000	1.25	115	5300

\*Two tubes.

## 3X2500F3

This compact, high-power triode has electrical characteristics identical to those of the 3X2500A3. Coaxial basing is not used, however, and special socketing is not required; conventional grid and filament leads are attached. This tube is frequently employed in industrial-heating or other radio-frequency equipments operating below 30 megacycles.

**PLATE DISSIPATION** 2500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 megacycles

**COOLING** Forced Air



## CHARACTERISTICS

Filament: Thoriated tungsten		Maximum Seal Temp.	150 °C
Voltage	7.5 volts	Maximum Anode-Core Temp.	150 °C
Current	49 to 54 amperes	Maximum Height	18.0 inches
Capacitances:		Maximum Diameter	3.625 inches
Grid-Filament	29.2 to 40.2 uufd	Net Weight	7.5 pounds
Grid-Plate	16.8 to 23.2 uufd		
Plate-Filament	0.6 to 1.2 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	6000	2.5	2500	150	6000	3.0*	113*	13,000*
C	Radio-Frequency Power Amplifier and Oscillator	6000	2.5	2500	150	6000	2.08	136	10,000
C	Plate-Modulated Radio-Frequency Power Amplifier	5000	2.0	1670	150	5000	1.25	115	5300

\*Two tubes.

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# TRIODES



## 3X3000A1

This high-power compact triode was specifically designed to be used in class-AB<sub>1</sub> audio-amplifier service. Two tubes will typically deliver 10,000 watts output in such service. The 3X3000A1 uses coaxial electrode terminals and may be installed or removed with a minimum of delay.

**PLATE DISSIPATION COOLING**

**3000 watts  
Forced Air**

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	Seal Temp.	150 °C
Voltage	49 to 54 amperes	Socket	Maximum Anode-Core Temp.	150 °C
Current		Maximum Envelope Temp.	Maximum Height	8.594 inches
Capacitances:		Maximum Diameter	Net Weight	4.156 inches
Grid-Filament	29 uufd			6.25 pounds
Grid-Plate	17 uufd			
Plate-Filament	2.5 uufd			

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	3000	—	6000	2.65*	0	10,000*

\*Two tubes.



## 3X3000F1

This low-mu high-power triode is electrically identical to the 3X3000A1. Physically, however, coaxial terminals have been replaced by heavy leads and a special socket is not needed. Typically, 10,000 watts audio may be obtained from two tubes in a class-AB<sub>1</sub> amplifier.

**PLATE DISSIPATION COOLING**

**3000 watts  
Forced Air**

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Maximum Seal Temp.	150 °C
Voltage	49 to 54 amperes	Maximum Anode-Core Temp.	150 °C
Current		Maximum Diameter	4.156 inches
Capacitances:		Net Weight	7.5 pounds
Grid-Filament	29 uufd		
Grid-Plate	17 uufd		
Plate-Filament	2.5 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	2.5	3000	—	6000	2.65*	0	10,000*

\*Two tubes.



## 25T

The 25T is a radiation-cooled triode suitable for use at maximum ratings through 60 megacycles. A plate-dissipation power of 25 watts is allowable in most installations without the necessity for forced-air cooling.

**PLATE DISSIPATION FREQUENCY FOR MAXIMUM RATINGS** 25 watts  
60 megacycles  
**COOLING** Convection and Radiation

### CHARACTERISTICS

Filament: Thoriated tungsten	6.3 volts	Base	Small 4-pin
Voltage	2.80 to 3.15 amperes	Socket	Johnson 122-224, National XC-4 or CIR-4
Current		Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	1.95 to 2.75 uufd	Maximum Height	4.38 inches
Grid-Plate	1.3 to 1.7 uufd	Maximum Diameter	1.44 inches
Plate-Filament	0.1 to 0.3 uufd	Net Weight	1.5 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.075	25	7	1250	0.130*	3.4*	112*
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.075	25	7	2000	0.063	4.0	100
C	Plate-Modulated Radio-Frequency Power Amplifier	1600	0.060	17	7	1600	0.053	3.1	68

\*Two tubes.



## 35T

The 35T is a radiation-cooled triode with a 50-watt plate-dissipation capability. It is suitable for both audio-frequency and radio-frequency service; maximum ratings apply to 100 megacycles.

**PLATE DISSIPATION FREQUENCY FOR MAXIMUM RATINGS** 50 watts  
100 megacycles  
**COOLING** Convection & Radiation

### CHARACTERISTICS

Filament: Thoriated tungsten	5.0 volts	Base	Medium 4-pin bayonet
Voltage	3.6 to 4.2 amperes	Socket	Johnson 122-224, National XC-4 or CIR-4
Current		Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	3.0 to 5.0 uufd	Maximum Height	5.500 inches
Grid-Plate	1.4 to 2.2 uufd	Maximum Diameter	1.813 inches
Plate-Filament	0.08 to 0.23 uufd	Net Weight	2.5 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.150	50	15	2000	0.167*	4*	235*
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.150	50	15	2000	0.125	6.8	200
C	Plate-Modulated Radio-Frequency Power Amplifier	1600	0.120	33	15	1500	0.090	11	105

\*Two tubes.

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# TRIODES

## 75TH

A general-purpose high- $\mu$  (20) triode with a plate-dissipation rating of 75 watts and with maximum ratings applicable to 40 megacycles. The 75TH may be used without forced-air cooling under most conditions.

**PLATE DISSIPATION** 75 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Convection & Radiation



### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Medium 4-pin bayonet
Voltage	5.0 volts	Socket	Johnson 122-224, National XC-4 or CIR-4
Current	5.8 to 6.6 amperes	Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	2.0 to 3.4 uufd	Maximum Height	7.250 inches
Grid-Plate	1.7 to 2.9 uufd	Maximum Diameter	2.810 inches
Plate-Filament	0.15 to 0.35 uufd	Net Weight	3 ounces


Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	3000	0.225	75	16	2000	0.225*	3*	300*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	75	16	2000	0.150	10	225
C	Plate-Modulated Radio-Frequency Power Amplifier	2400	0.180	50	16	2000	0.110	6	170

\*Two tubes.

## 75TL

A general-purpose low- $\mu$  (12) triode with a plate-dissipation rating of 75 watts and with maximum ratings applicable to 40 megacycles. The 75TL may be used without forced-air cooling under most conditions.

**PLATE DISSIPATION** 75 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Convection and Radiation

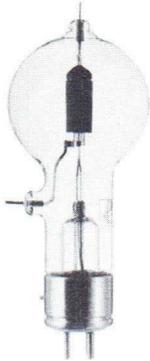

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Medium 4-pin bayonet
Voltage	5.0 volts	Socket	Johnson 122-224, National XC-4 or CIR-4
Current	5.8 to 6.6 amperes	Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	1.8 to 3.2 uufd	Maximum Height	7.250 inches
Grid-Plate	1.8 to 3.2 uufd	Maximum Diameter	2.810 inches
Plate-Filament	0.30 to 0.50 uufd	Net Weight	3 ounces


Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	75	—	2000	0.130*	0	110*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	75	13	2000	0.150	8	225
C	Plate-Modulated Radio-Frequency Power Amplifier	2400	0.180	50	13	2000	0.130	14	210

\*Two tubes.

## 100TH

This radiation-cooled general-purpose high- $\mu$  (38) triode is useable at maximum ratings through 40 megacycles. Forced-air cooling is not required in most applications.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Convection and Radiation

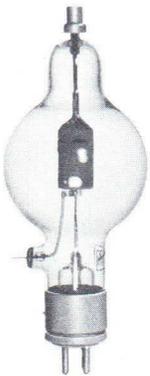

### CHARACTERISTICS

Filament: Thoriated tungsten		Base	Medium 4-pin bayonet
Voltage	5.0 volts	Socket	Johnson 122-224, National XC-4 or CIR-4
Current	5.8 to 6.6 amperes	Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	2.5 to 3.4 uufd	Maximum Height	7.750 inches
Grid-Plate	1.7 to 2.3 uufd	Maximum Diameter	3.187 inches
Plate-Filament	0.45 uufd	Net Weight	4 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	100	20	2500	0.250*	7.5*	425*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	100	20	3000	0.165	18	400
C	Plate-Modulated Radio-Frequency Power Amplifier	2500	0.180	65	20	2500	0.140	17	285

\*Two tubes.

## 100TL

This radiation-cooled general-purpose low- $\mu$  (14) triode is useable at maximum ratings through 40 megacycles. Forced-air cooling is not required in most applications.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Convection and Radiation



### CHARACTERISTICS


Filament: Thoriated tungsten		Base	Medium 4-pin bayonet
Voltage	5.0 volts	Socket	Johnson 122-224, National XC-4 or CIR-4
Current	5.8 to 6.6 amperes	Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	2.3 uufd	Maximum Height	7.750 inches
Grid-Plate	2.0 uufd	Maximum Diameter	3.187 inches
Plate-Filament	0.4 uufd	Net Weight	4 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	100	15	2500	0.250*	10*	425*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	100	15	3000	0.165	20	400
C	Plate-Modulated Radio-Frequency Power Amplifier	2500	0.180	65	15	2500	0.140	23	285

\*Two tubes.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# TRIODES

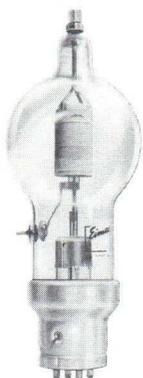

## 250TH

A high-power high- $\mu$  (37) triode for general usage. The 250TH may be employed at maximum ratings through 40 megacycles; forced-air cooling is not required in most applications.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles


**COOLING** Convection and Radiation

## CHARACTERISTICS

Filament: Thoriated tungsten	5.0 volts	Base Socket	Johnson 123-211, Special 4-pin National XM-50
Voltage	9.7 to 11.2 amperes	Maximum Seal Temp.	200 °C
Current		Maximum Envelope Temp.	225 °C
Capacitances:		Maximum Height	10.125 inches
Grid-Filament	3.7 to 5.1 uufd	Maximum Diameter	3.813 inches
Grid-Plate	2.2 to 3.0 uufd	Net Weight	10 ounces
Plate-Filament	0.6 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	250	40	3000	0.560*	42*	1180*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	250	40	4000	0.313	39	1000
C	Plate-Modulated Radio-Frequency Power Amplifier	3200	0.280	165	40	3000	0.200	14	435

\*Two tubes.

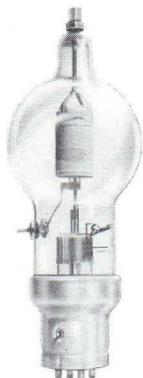

## 250TL

A high-power low- $\mu$  (14) triode for general usage. The 250TL may be employed at maximum ratings through 40 megacycles; forced-air cooling is not required in most applications.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles


**COOLING** Convection and Radiation

## CHARACTERISTICS

Filament: Thoriated tungsten	5.0 volts	Base Socket	Johnson 123-211, Special 4-pin National XM-50
Voltage	9.7 to 11.2 amperes	Maximum Seal Temp.	200 °C
Current		Maximum Envelope Temp.	225 °C
Capacitances:		Maximum Height	10.125 inches
Grid-Filament	3.2 to 4.3 uufd	Maximum Diameter	3.813 inches
Grid-Plate	2.5 to 3.5 uufd	Net Weight	10 ounces
Plate-Filament	0.4 to 0.7 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	250	35	3000	0.500*	16*	1000*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	250	35	4000	0.310	33	1000
C	Plate-Modulated Radio-Frequency Power Amplifier	3200	0.280	165	35	3000	0.200	11	435

\*Two tubes.

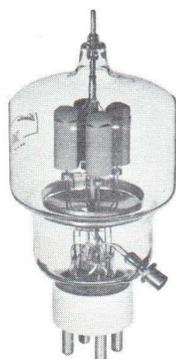

## 304TH

A unique high- $\mu$  (20) triode, actually four paralleled triodes in one envelope, often employed in pulse service where high peak currents are demanded. The 304TH is also an excellent choice for amplifier or oscillator applications up to 40 megacycles when high output power is required and where radiation cooling is desired.

**PLATE DISSIPATION** 300 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles


**COOLING** Convection and Radiation

## CHARACTERISTICS

Filament: Thoriated tungsten	5.0 volts	Base Socket	Johnson 124-213, Special 4-pin National XM-50
Voltage	24.0 to 28.0 amperes	Maximum Seal Temp.	200 °C
Current		Maximum Envelope Temp.	225 °C
Capacitances:		Maximum Height	7.625 inches
Grid-Filament	12 to 16 uufd	Maximum Diameter	3.563 inches
Grid-Plate	8 to 11 uufd	Net Weight	9 ounces
Plate-Filament	1.0 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.900	300	60	3000	0.665*	14*	1400*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.900	300	60	3000	0.500	53	1200
C	Plate-Modulated Radio-Frequency Power Amplifier	2500	0.750	200	60	2500	0.400	29	800

\*Two tubes.

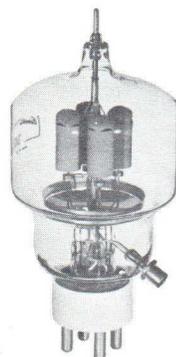

## 304TL

A unique low- $\mu$  (12) triode, actually four paralleled triodes in one envelope, often employed in pulse service where high peak currents are demanded. The 304TL is also an excellent choice for amplifier or oscillator applications up to 40 megacycles when high output power is required and where radiation cooling is desired.

**PLATE DISSIPATION** 300 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles

**COOLING** Convection and Radiation

## CHARACTERISTICS

Filament: Thoriated tungsten	5.0 volts	Base Socket	Johnson 124-213, Special 4-pin National XM-50
Voltage	24.0 to 28.0 amperes	Maximum Seal Temp.	200 °C
Current		Maximum Envelope Temp.	225 °C
Capacitances:		Maximum Height	7.625 inches
Grid-Filament	10.0 to 14.3 uufd	Maximum Diameter	3.563 inches
Grid-Plate	7.1 to 10.2 uufd	Net Weight	9 ounces
Plate-Filament	0.9 uufd		

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.900	300	—	3000	0.444*	0	730*
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.900	300	50	3000	0.800*	55*	1800*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.900	300	50	3000	0.500	40	1200
C	Plate-Modulated Radio-Frequency Power Amplifier	2500	0.700	200	50	2500	0.450	40	925

\*Two tubes.

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# TRIODES

## 450TH

The 450TH is a high-power general-purpose triode with a 450-watt plate-dissipation rating and is cooled by radiation and convection. It has an amplification factor of 38; it is useable at maximum ratings through 40 megacycles.

**PLATE DISSIPATION** 450 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Radiation and Convection



### CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 11.0 to 12.5 amperes  
 Capacitances:  
 Grid-Filament 7.3 to 8.9 uufd  
 Grid-Plate 4.0 to 5.4 uufd  
 Plate-Filament 0.4 to 0.9 uufd

Base Socket Johnson 211 or Special 4-pin National XM-50  
 Maximum Seal Temp. 200 °C  
 Maximum Envelope Temp. 225 °C  
 Maximum Height 12.625 inches  
 Maximum Diameter 5.125 inches  
 Net Weight 1.3 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	6000	0.600	450	80	5000	0.620*	20*	2200*
C	Radio-Frequency Power Amplifier and Oscillator	6000	0.600	450	80	5000	0.450	46	1800
C	Plate-Modulated Radio-Frequency Power Amplifier	4500	0.500	300	80	4500	0.345	29	1250

\*Two tubes.

## 450TL

The 450TL is a high-power general-purpose triode with a 450-watt plate-dissipation rating and is cooled by radiation and convection. It has an amplification factor of 18; it is useable at maximum ratings through 40 megacycles.

**PLATE DISSIPATION** 450 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Radiation and Convection



### CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 11.0 to 12.5 amperes  
 Capacitances:  
 Grid-Filament 5.6 to 7.6 uufd  
 Grid-Plate 4.2 to 5.7 uufd  
 Plate-Filament 0.5 to 0.8 uufd

Base Socket Johnson 211 or Special 4-pin National XM-50  
 Maximum Seal Temp. 200 °C  
 Maximum Envelope Temp. 225 °C  
 Maximum Height 12.625 inches  
 Maximum Diameter 5.125 inches  
 Net Weight 1.3 pounds


Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	6000	0.600	450	65	5000	0.620*	28*	2200*
C	Radio-Frequency Power Amplifier and Oscillator	6000	0.600	450	65	5000	0.450	42	1800
C	Plate-Modulated Radio-Frequency Power Amplifier	4500	0.500	300	65	4500	0.345	36	1250

\*Two tubes.

## 592/3-200A3

This triode features short low-inductance grid leads and a center-tapped thoriated-tungsten filament. Maximum ratings apply at frequencies up to 150 megacycles; cooling is by radiation and forced air.

**PLATE DISSIPATION** 200 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 150 megacycles  
**COOLING** Radiation and Forced Air

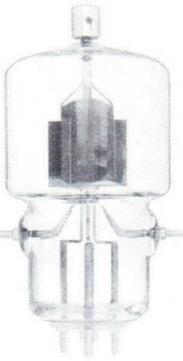

### CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 10.0 volts  
 Current 4.7 to 5.3 amperes  
 Capacitances:  
 Grid-Filament 3.6 uufd  
 Grid-Plate 3.3 uufd  
 Plate-Filament 0.29 uufd

Maximum Seal Temp. 175 °C  
 Maximum Envelope Temp. 225 °C  
 Maximum Height 6.0 inches  
 Maximum Diameter 2.875 inches  
 Net Weight 6 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	3500	0.250	200	25	3000	0.400*	20*	820*
C	Radio-Frequency Power Amplifier and Oscillator	3500	0.250	200	25	3500	0.228	15	600
C	Plate-Modulated Radio-Frequency Power Amplifier	2600	0.200	130	25	2500	0.200	19	375

\*Two tubes.

## 750TL

The 750TL is a high-power triode capable of delivering three kilowatts output power at frequencies through 40 megacycles. It is cooled by radiation and convection in the usual installation.

**PLATE DISSIPATION** 750 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles  
**COOLING** Radiation and Convection



### CHARACTERISTICS

Filament: Thoriated tungsten  
 Voltage 7.5 volts  
 Current 20.0 to 22.7 amperes  
 Capacitances:  
 Grid-Filament 7.0 to 10.0 uufd  
 Grid-Plate 5.0 to 7.0 uufd  
 Plate-Filament 0.9 to 1.5 uufd

Base Socket Johnson 124-214 or Special 4-pin National XM-50  
 Maximum Seal Temp. 200 °C  
 Maximum Envelope Temp. 225 °C  
 Maximum Height 17.0 inches  
 Maximum Diameter 7.125 inches  
 Net Weight 2.9 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	10,000	1.0	750	100	6000	0.834*	46*	3500*
C	Radio-Frequency Power Amplifier and Oscillator	10,000	1.0	750	100	6000	0.625	125	3000
C	Plate-Modulated Radio-Frequency Power Amplifier	8000	0.8	500	100	6000	0.415	75	2000

\*Two tubes.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# TRIODES

## 1000T



This high-power high- $\mu$  (35) triode enjoys a maximum plate-dissipation rating of 1000 watts; this and other maximum ratings apply through 50 megacycles. It is cooled by radiation and forced air.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 50 megacycles

**COOLING** Radiation and Forced Air


### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	50-watt jumbo 4-pin with air-conduction pipe
Voltage	14.5 to 16.5 amperes	Socket	Johnson 123-211
Current		Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	9.3 uufd	Maximum Height	12.625 inches
Grid-Plate	5.1 uufd	Maximum Diameter	5.125 inches
Plate-Filament	0.5 uufd	Net Weight	1.25 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	7500	0.750	1000	80	6000	1.05*	60*	4600*
C	Radio-Frequency Power Amplifier and Oscillator	7500	0.750	1000	80	6000	0.667	60	3000
C	Plate-Modulated Radio-Frequency Power Amplifier	6000	0.600	665	80	6000	0.600	75	2935

\*Two tubes.

## 1500T

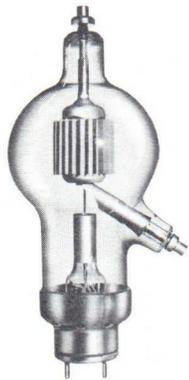

This 1500-watt medium- $\mu$  (24) triode is intended for use in general-purpose high-power applications at frequencies up to 40 megacycles. It is cooled by radiation and forced air.

**PLATE DISSIPATION** 1500 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles

**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	7.5 volts	Base	Special 4-pin
Voltage	22.0 to 25.0 amperes	Socket	Johnson 124-214
Current		Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	7.5 to 12.5 uufd	Maximum Height	17.0 inches
Grid-Plate	5.5 to 9.0 uufd	Maximum Diameter	7.125 inches
Plate-Filament	1.1 to 2.0 uufd	Net Weight	3.0 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B	Audio-Frequency Power Amplifier and Modulator	8000	1.25	1500	125	6000	1.650*	115*	7000*
C	Radio-Frequency Power Amplifier and Oscillator	8000	1.25	1500	125	7000	0.860	85	4500
C	Plate-Modulated Radio-Frequency Power Amplifier	6500	1.00	1000	125	6000	0.665	70	3000

\*Two tubes.

## 2000T



The largest internal-anode triode in the comprehensive Eimac line. The 2000T has a medium- $\mu$  (23) and is intended for high-power general-purpose service at frequencies through 40 megacycles. It is cooled by radiation and forced air.

**PLATE DISSIPATION** 2000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 40 megacycles

**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	10.0 volts	Base	Special 4-pin
Voltage	22.0 to 25.0 amperes	Socket	Johnson 124-214
Current		Maximum Seal Temp.	200 °C
Capacitances:		Maximum Envelope Temp.	225 °C
Grid-Filament	12.7 uufd	Maximum Height	17.750 inches
Grid-Plate	8.5 uufd	Maximum Diameter	8.125 inches
Plate-Filament	1.7 uufd	Net Weight	3.5 pounds

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	8000	1.75	2000	150	7000	1.80*	175*	8600*
C	Radio-Frequency Power Amplifier and Oscillator	8000	1.75	2000	150	7000	1.15	115	6000
C	Plate-Modulated Radio-Frequency Power Amplifier	6000	1.40	1350	150	6000	1.13	225	5400

\*Two tubes.


**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# TETRODES AND PENTODE

Eimac power tetrodes are divided into two classifications. The internal-anode glass types—4-65A through 4-1000A—are radiation-cooled, high gain-amplifier tetrodes capable of operation well into the UHF range. The external-anode ceramic-and-metal types such as the 4CX250B and 4CX1000A are used in compact, high-frequency equipment where space is at a premium and dependability is essential.

One of Eimac's highly reliable tetrodes is the 4CX300A. Designed for such severe environments as guided missile applications, this tube is capable of withstanding conditions of high ambient temperatures and extreme vibration. The 4CN15A and 4CX125C are members of this rugged tetrode family.

▶ Indicates new item

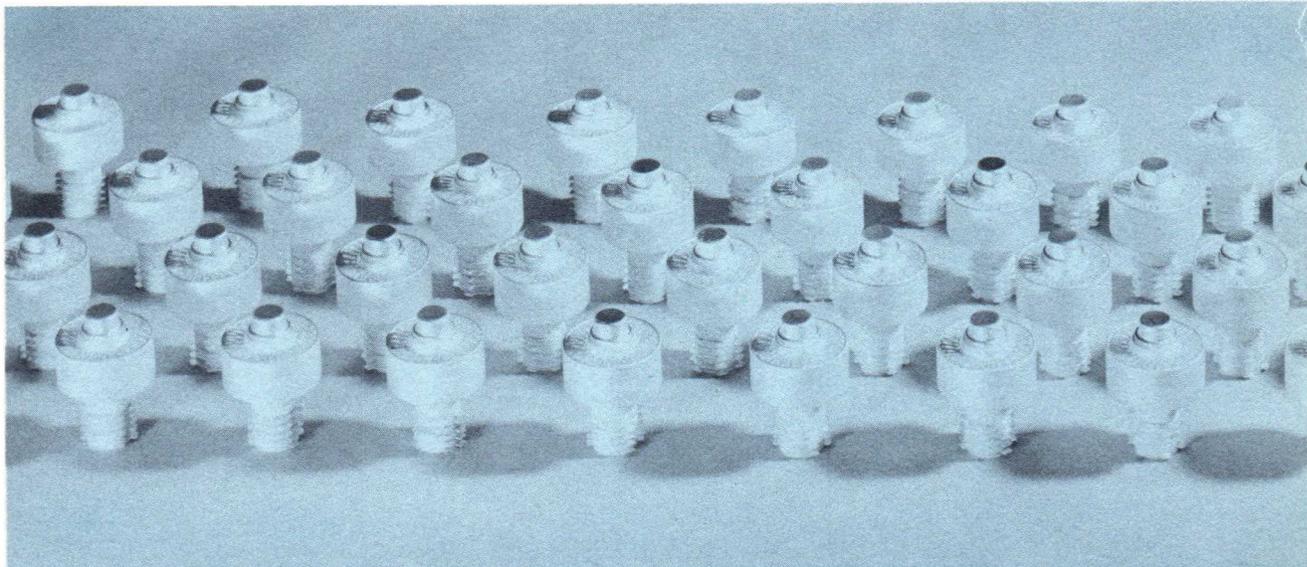

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH  
PRODUCT DESIGN AND EXPERIMENTATION.**

**TETRODES  
PENTODE**

# TETRODES



## 4-65A

A general purpose radial-beam power tetrode, the 4-65A is cooled by radiation and convection and may be used without forced air in most installations. Maximum ratings extend to 150 megacycles.

**PLATE DISSIPATION** 65 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 150 megacycles  
**COOLING** Convection and Radiation

### CHARACTERISTICS

Filament: Thoriated tungsten	Base Socket	5-pin National HX29 or Johnson 122-101
Voltage 6.0 volts	Max. Seal Temp.	200 °C.
Current 3.2 to 3.8 amperes	Max. Envelope Temp.	225 °C.
Capacitances (Grounded Filament):	Max. Height	4.38 inches
Input 6.0 to 8.3 uufd	Max. Diameter	2.38 inches
Output 1.9 to 2.6 uufd	Net Weight	3 ounces
Feed-Through 0.12 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.150	65	10	—	1750	500	0.170*	0	175*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	0.150	65	10	—	3000	360	0.065	0	130
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.150	65	10	5	1800	250	0.220*	1.3*	270*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.150	65	10	5	3000	250	0.115	1.7	280
C	Plate-Modulated Radio-Frequency Amplifier	2500	0.120	45	10	5	2500	250	0.110	2.6	230

\*Two Tubes.



## 4-125A (4D21)

This 125-watt general-purpose power tetrode is usable at maximum ratings to 120 megacycles. Its low interelectrode capacitances make it ideal for r-f amplifier service but it is equally useful in audio applications.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 120 megacycles  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base Socket	5-pin metal shell National HX100 or Johnson 122-275
Voltage 5.0 volts	Max. Seal Temp.	225 °C.
Current 6.0 to 7.0 amperes	Max. Envelope Temp.	170 °C.
Capacitances (Grounded Filament):	Max. Height	5.89 inches
Input 9.2 to 12.4 uufd	Max. Diameter	2.81 inches
Output 2.5 to 3.5 uufd	Net Weight	6.5 ounces
Feed-Through 0.07 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	125	20	—	2500	600	0.232*	0	330*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	0.225	125	20	—	3000	510	0.105	0	200
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	3000	0.225	125	20	5	2500	350	0.260*	1*	400*
C	Radio-Frequency Power Amplifier and Oscillator	3000	0.225	125	20	5	3000	350	0.167	2.5	375
C	Plate-Modulated Radio-Frequency Amplifier	2500	0.200	85	20	5	2500	350	0.152	3.3	300

\*Two Tubes.



## 4-250A (5D22)

The Eimac 4-250A enjoys a 250-watt plate dissipation rating and is usable at maximum ratings through the FM broadcast band. Its low interelectrode capacitances make it an ideal choice for high-frequency applications but it is often used in audio-amplifier work as well.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 megacycles  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base Socket	5-pin metal shell Eimac SK-400
Voltage 5.0 volts	Max. Seal Temp.	170 °C.
Current 13.5 to 14.7 amperes	Max. Envelope Temp.	225 °C.
Capacitances (Grounded Filament):	Max. Height	6.38 inches
Input 10.7 to 14.5 uufd	Max. Diameter	3.56 inches
Output 3.7 to 5.1 uufd	Net Weight	8 ounces
Feed-Through 0.14 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	250	35	—	3000	600	0.417*	0	750*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	4000	0.350	250	35	—	4000	510	0.165	0	450
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	250	35	10	3000	300	0.473*	1.9*	1040*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	250	35	10	4000	500	0.312	2.46	1000
C	Plate-Modulated Radio-Frequency Amplifier	3200	0.275	165	35	10	3000	400	0.225	3.2	510

\*Two Tubes.



## 4-400A

A 400-watt general-purpose radial-beam tetrode, the 4-400A is ideal for any r-f application below 110 megacycles. Its ratings allow an input power of up to 1400 watts in such service or in others where lower radio frequencies or audio frequencies are to be amplified.

**PLATE DISSIPATION** 400 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 megacycles  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base Socket	5-pin metal shell Eimac SK-400
Voltage 5.0 volts	Max. Seal Temp.	200 °C.
Current 13.5 to 14.7 amperes	Max. Envelope Temp.	225 °C.
Capacitances (Grounded Filament):	Max. Height	6.38 inches
Input 10.7 to 14.5 uufd	Max. Diameter	3.56 inches
Output 4.2 to 6.6 uufd	Net Weight	9 ounces
Feed-Through 0.17 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	400	35	—	4000	750	0.585*	0	1540*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	4000	0.350	400	35	—	4000	705	0.250	0	650
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	4000	0.350	400	35	10	4000	500	0.638*	3.5*	1750*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	400	35	10	4000	500	0.350	5.8	1100
C	Plate-Modulated Radio-Frequency Amplifier	3200	0.275	270	35	10	3000	500	0.275	3.5	630

\*Two Tubes.



## 4-1000A

This high-power general-purpose tetrode is capable of dissipating 1000 watts from its radiation-cooled anode. Maximum ratings apply through the FM broadcast band but its low drive-power requirements make it an ideal choice for audio and low-frequency applications as well.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 megacycles  
**COOLING** Radiation and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base Socket	5-pin metal shell Eimac SK-500
Voltage 7.5 volts	Max. Seal Temp.	150 °C.
Current 20.0 to 22.7 amperes	Max. Envelope Temp.	225 °C.
Capacitances (Grounded Filament):	Max. Height	9.63 inches
Input 23.8 to 32.4 uufd	Max. Diameter	5.25 inches
Output 6.8 to 9.4 uufd	Net Weight	1.5 pounds
Feed-Through 0.35 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	6000	0.700	1000	75	—	6000	1000	0.950*	0	3840*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	6000	0.700	1000	75	—	6000	1000	0.475	0	1920
AB <sub>2</sub>	Audio-Frequency Power Amplifier and Modulator	6000	0.700	1000	75	25	6000	500	0.950*	4.7*	3900*
C	Radio-Frequency Power Amplifier and Oscillator	6000	0.700	1000	75	25	6000	500	0.700	15	3400
C	Plate-Modulated Radio-Frequency Amplifier	5000	0.600	670	75	25	5500**	500	0.600	9	2630

\*\*Below 30 mc.

\*Two Tubes.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# TETRODES



A special version of the popular 4CX300A intended for use in low-duty pulse applications or where size and weight are important. The 4CN15A carries a nominal plate dissipation rating of 15 watts but this may be extended by employing liquid immersion or another suitable heat sink. Its rugged design makes it ideal for applications where shock and/or vibration are encountered.

**PLATE DISSIPATION** 15 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Convection

### CHARACTERISTICS

Cathode: Oxide-coated, Unipotential Base Special, breechblock  
 Heater: Socket Eimac SK-700 series  
 Voltage 6.0 volts Max. Seal Temp. 250 °C  
 Current 2.2 to 3.2 amperes Max. Anode-Core Temp. 250 °C  
 Capacitances (Grounded Cathode):  
 Input 25 to 33 uufd Max. Height 2.5 inches  
 Output 3.5 to 4.5 uufd Max. Diameter 0.894 inches  
 Feed-Through 0.06 uufd Net Weight 2.5 ounces

## 4CW2000A



This recent addition to the Eimac line is electrically identical to the popular 4CX1000A except for its plate dissipation rating which is 2000 watts. It is intended for use where water cooling is preferred or where higher anode-dissipation capability is required.

**PLATE DISSIPATION** 2000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 400 megacycles  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, Unipotential Base Special, breechblock  
 Heater: Socket Eimac SK-800 series  
 Voltage 6.0 volts Max. Seal Temp. 200 °C  
 Current 9.5 to 11.5 amperes Max. Height 5.875 inches  
 Capacitances (Grounded Cathode):  
 Input 77 to 90 uufd Max. Diameter 2.625 inches  
 Output 11 to 13 uufd Net Weight 1.75 pounds  
 Feed-Through 0.02 uufd

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier or Modulator	3000	1.0	2000	12	0	3000	325	1.8*	0	3360*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	1.0	2000	12	0	3000	325	0.9	0	1680

\*Two Tubes.

## 4CW10,000A



Electrically identical to the 4CX5000A except for its plate dissipation rating, the 4CW10,000A is intended for use where water cooling is preferred or where the extra plate dissipation is a necessity. It may be used at maximum ratings through 30 megacycles and at slightly reduced ratings through the FM broadcast band.

**PLATE DISSIPATION** 10,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 megacycles  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten Base Special, Concentric  
 Voltage 7.5 volts Socket Eimac SK-300  
 Current 73 to 78 amperes Max. Seal Temp. 200 °C  
 Capacitances (Grounded Filament):  
 Input 106 uufd Max. Height 11.407 inches  
 Output 18 uufd Max. Diameter 4.656 inches  
 Feed-Through 0.75 uufd Net Weight 7.5 pounds

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.00	10,000	250	—	7500	1500	7.18*	0	34,300*
AB <sub>2</sub>	Radio-Frequency Linear Power Amplifier	7500	4.00	10,000	250	—	7500	1500	3.59	0	17,150

\*Two tubes.

## 4CX125C



This tube type is a horizontally-finned version of the famous 4CX300A and is intended for use where transverse air cooling is desired. However, it is also useful in applications where anode power is dissipated by liquid immersion. Its electrical characteristics are identical to those of the 4CX300A with the exception of plate dissipation, which is established at 125 watts maximum when air cooling is employed. It is ideally suited for applications where shock and/or vibration are experienced.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, Unipotential Base Special, breechblock  
 Heater: Socket Eimac SK-700 series  
 Voltage 6.0 volts Max. Seal Temp. 250 °C  
 Current 2.2 to 3.2 amperes Max. Anode-Core Temp. 250 °C  
 Capacitances (Grounded Cathode):  
 Input 25 to 33 uufd Max. Height 2.50 inches  
 Output 3.5 to 4.5 uufd Max. Diameter 1.25 inches  
 Feed-Through 0.06 uufd Net Weight 3.5 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier or Oscillator	2000	0.250	125	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated Radio-Frequency Amplifier	1500	0.200	80	12	2	1500	250	0.200	1.7	235

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# TETRODES

## 7580 (4CX250BA)



This new addition to the Eimac line of ceramic and metal tetrodes has high-gain characteristics which make it particularly suitable for class-AB<sub>1</sub> radio-frequency or audio-frequency service; of course, it is also an excellent power tetrode for class-C service. Maximum ratings apply at frequencies up to 500 megacycles.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	9-pin, special
Heater:	Socket	Eimac SK-600 series
Voltage 6.0 volts	Max. Seal Temp.	250 °C
Current 2.3 to 2.9 amperes	Max. Anode-Core Temp.	250 °C
Capacitances (Grounded Cathode):		
Input 16.0 to 18.5 uufd	Max. Height	2.464 inches
Output 4.0 to 5.0 uufd	Max. Diameter	1.640 inches
Feed-Through 0.06 uufd	Net Weight	4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	350	0.250	2.9	390
C	Plate-Modulated Radio-Frequency Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 4CX250B



A 250-watt general-purpose external-anode tetrode featuring ceramic-metal construction. This compact power tube can be used at maximum ratings at frequencies up to 500 megacycles. It is recommended for use in equipments of new design.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, Unipotential	Base	9-pin, special
Heater:	Socket	Eimac SK-600 series
Voltage 6.0 volts	Max. Seal Temp.	250 °C
Current 2.3 to 2.9 amperes	Max. Anode-Core Temp.	250 °C
Capacitances (Grounded Cathode):		
Input 14.2 to 17.2 uufd	Max. Height	2.464 inches
Output 4.0 to 5.0 uufd	Max. Diameter	1.640 inches
Feed-Through 0.06 uufd	Net Weight	4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated Radio-Frequency Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 4CX250F



The 4CX250F is a ceramic and metal radial-beam tetrode with electrical characteristics similar to the 4CX250B but designed for use where a heater voltage of 26.5 volts is more desirable. Maximum ratings apply to 500 megacycles but the tube is also an excellent choice for other r-f or a-f applications. It is recommended for use in equipments of new design.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, Unipotential	Base	9-pin, special
Heater:	Socket	Eimac SK-600 series
Voltage 26.5 volts	Max. Seal Temp.	250 °C
Current 0.50 to 0.62 ampere	Max. Anode-Core Temp.	250 °C
Capacitances (Grounded Cathode):		
Input 14.2 to 17.2 uufd	Max. Height	2.464 inches
Output 4.0 to 5.0 uufd	Max. Diameter	1.640 inches
Feed-Through 0.06 uufd	Net Weight	4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated Radio-Frequency Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 4CX250K



This coaxial-based tetrode is particularly useful as a CW r-f amplifier between 500 and 1200 megacycles; in pulse applications, its useful upper frequency is above 1500 megacycles. The 4CX250K requires a heater voltage of 6.0 volts; it is recommended for use in new equipment.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, Unipotential	Base	Special, Coaxial
Heater:	Max. Seal Temp.	250 °C
Voltage 6.0 volts	Max. Anode-Core Temp.	250 °C
Current 2.3 to 3.0 amperes		
Capacitances (Grounded Cathode):	Max. Height	2.813 inches
Input 25.0 to 29.0 uufd	Max. Diameter	1.640 inches
Output 4.0 to 4.9 uufd	Net Weight	4 ounces
Feed-Through 0.05 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated Radio-Frequency Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.

# TETRODES

## 4CX250M

The 4CX250M is a coaxial-based tetrode with features which make it especially suitable for CW amplifier service at frequencies up to 1200 megacycles; in pulse service, this range is extended to above 1500 megacycles. This tube requires a heater voltage of 26.5 volts and is, therefore, suitable for use in certain specialized applications. It is recommended for use in new equipments.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: Voltage 26.5 volts  
Current 0.53 to 0.68 ampere  
Capacitances (Grounded Cathode):  
Input 25.0 to 29.0 uufd  
Output 4.0 to 4.9 uufd  
Feed-Through 0.05 uufd

Base Special, coaxial  
Socket Eimac SK-700 series  
Max. Seal Temp. 250 °C  
Max. Anode-Core Temp. 250 °C  
Max. Height 2.813 inches  
Max. Diameter 1.640 inches  
Net Weight 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

## 4CX300A

This rugged ceramic-metal tetrode with unique breechblock basing has electrical characteristics similar to other tubes in the 4X150 and 4X250 families but is especially suited for service in severe environments. Its unusual internal construction assures reliable operation at acceleration levels up to 20 g's. Suitable for service from dc to 500 megacycles, the 4CX300A is first choice for use in new equipments where shock and/or vibration are expected.

**PLATE DISSIPATION** 300 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: Voltage 6.0 volts  
Current 2.2 to 3.2 amperes  
Capacitances (Grounded Cathode):  
Input 25 to 33 uufd  
Output 3.5 to 4.5 uufd  
Feed-Through 0.06 uufd

Base Special, breechblock  
Socket Eimac SK-700 series  
Max. Seal Temp. 225 °C  
Max. Anode-Core Temp. 250 °C  
Max. Height 2.5 inches  
Max. Diameter 1.65 inches  
Net Weight 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2500	0.250	300	12	—	2500	350	0.500*	0	800*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2500	0.250	300	12	—	2500**	350	0.250	0	400
C	Radio-Frequency Power Amplifier and Oscillator	2500	0.250	300	12	2	2500**	250	0.250	2.8	500
C	Plate-Modulated R-F Power Amplifier	1500	0.200	200	12	2	1500	250	0.200	1.7	235

\*Two tubes.

\*\*Below 250 mc. only.

## 4CX1000A

This high-power ceramic-metal tetrode is an excellent choice for applications where class-AB<sub>1</sub> operation is desired. It is capable of delivering more than 1500 watts plate output power per tube in audio or r-f service without requiring grid driving power. It is recommended for use in new equipments.

**PLATE DISSIPATION** 1000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 400 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater: Voltage 6.0 volts  
Current 9.5 to 11.5 amperes  
Capacitances (Grounded Cathode):  
Input 77 to 90 uufd  
Output 11 to 13 uufd  
Feed-Through 0.02 uufd

Base Special, breechblock  
Socket Eimac SK-800 series  
Max. Seal Temp. 200 °C  
Max. Anode-Core Temp. 250 °C  
Max. Height 4.75 inches  
Max. Diameter 3.36 inches  
Net Weight 27 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	3000	1.0	1000	12	—	3000	325	1.8*	0	3360*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	3000	1.0	1000	12	—	3000	325	0.9	0	1680

\*Two tubes.

## 4CX5000A

This high-power ceramic and metal tetrode features high class-AB<sub>1</sub> output power at audio and radio frequencies. It is also an excellent choice for AM or FM commercial service where high-efficiency class-C operation is desired. Its modern and straight-forward design makes it preferred for use in new equipments.

**PLATE DISSIPATION** 5000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 30 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten  
Voltage 7.5 volts  
Current 73 to 78 amperes  
Capacitances (Grounded Filament):  
Input 106 uufd  
Output 18 uufd  
Feed-Through 0.75 uufd

Base Special, concentric  
Socket Eimac SK-300  
Max. Seal Temp. 250 °C  
Max. Anode-Core Temp. 250 °C  
Max. Height 8.875 inches  
Max. Diameter 4.875 inches  
Net Weight 9.5 pounds



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	7500	4.0	6000	250	—	7000	1250	3.65*	0	17,500*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	7500	4.0	6000	250	—	7500	1250	1.9	0	10,000
C	Radio-Frequency Power Amplifier and Oscillator	7500	3.0	5000	250	75	7500	500	2.8	150	16,000
C	Plate-Modulated R-F Power Amplifier	5000	2.5	3500	250	75	5000	500	1.4	25	5800

\*Two tubes.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# TETRODES

## 4W300B



A general-purpose radial-beam tetrode with electrical characteristics similar to those of the Eimac 4X250B, this water-cooled version is intended for use where reserve anode dissipation is desired or where the use of water is a convenience. Maximum ratings apply to frequencies as high as 500 megacycles.

**PLATE DISSIPATION** 300 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: 9-pin, special
Heater: 6.0 volts	Socket: Eimac SK-600 series
Voltage: 2.3 to 2.9 amperes	Max. Seal Temp. 175 °C
Current: 14.2 to 17.2 uufd	Max. Height: 3.407 inches
Capacitances (Grounded Cathode):	Max. Diameter: 2.126 inches
Input: 4.0 to 5.0 uufd	Net Weight: 6 ounces
Output: 0.06 uufd	
Feed-Through:	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 4W20.000A



This very-high-power water-cooled tetrode with electron-bombarded unipotential cathode suggests itself for use in circuitry where high peak currents are required. Accordingly, it finds wide acceptance in TV amplifiers, pulse modulators, linear accelerators, etc. Its water-cooled anode also allows its use in low-efficiency applications where high plate dissipation is encountered.

**PLATE DISSIPATION** 20,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 220 megacycles  
**COOLING** Water and Forced Air

### CHARACTERISTICS

Cathode: Thoriated tungsten, unipotential, bombardment-heated	Base: Special, concentric
D-C Voltage: 1400 volts	Max. Glass-Seal Temp. 150 °C
D-C Current: 1.8 amperes	Max. Ceramic-Seal Temp. 250 °C
Capacitances (Grounded Grid):	Max. Height: 15.2 inches
Input: 75 to 87 uufd	Max. Diameter: 5.013 inches
Output: 21 to 25.5 uufd	Net Weight: 7.6 pounds
Feed-Through: 0.04 to 0.06 uufd	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (kws)
BTV	Radio-Frequency Linear Amplifier—TV Visual Service	8000	15	20,000	200	60	7000	1200	6.0*	500	26
C	Radio-Frequency Power Amplifier	8000	15	20,000	200	60	7000	1200	3.4	830	13

\*Peak synchronizing level.

## 4X150A



This veteran of external-anode tetrodes, and an Eimac original, continues to enjoy its deserved popularity. Recent tube improvements have made possible increases in maximum plate-voltage and plate-dissipation ratings. In class-AC or class-C service an input power of 500 watts is now allowed at frequencies up to 150 megacycles.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 150 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: 9-pin, special
Heater: 6.0 volts	Socket: Eimac SK-600 series
Voltage: 2.3 to 2.9 amperes	Max. Base-Seal Temp. 175 °C
Current: 14.5 to 17.0 uufd	Max. Anode-Core Temp. 250 °C
Capacitances (Grounded Cathode):	Max. Height: 2.404 inches
Input: 4.0 to 4.8 uufd	Max. Diameter: 1.640 inches
Output: 0.05 uufd	Net Weight: 4 ounces
Feed-Through:	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1600	0.200	165	10	2	1500	250	0.200	1.7	235

\*Two tubes.

## 4X150D



A 26.5-volt heater makes the 4X150D suitable for service in many applications where this somewhat unusual heater voltage is encountered. This tube type has recently been improved and it now carries new plate-voltage and plate-dissipation ratings; present ratings allow 500 watts input at frequencies up to 150 megacycles.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 150 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base: 9-pin, special
Heater: 26.5 volts	Socket: Eimac SK-600 series
Voltage: 0.50 to 0.62 ampere	Max. Base-Seal Temp. 175 °C
Current: 14.5 to 17.0 uufd	Max. Anode-Core Temp. 250 °C
Capacitances (Grounded Cathode):	Max. Height: 2.404 inches
Input: 4.0 to 4.8 uufd	Max. Diameter: 1.640 inches
Output: 0.05 uufd	Net Weight: 4 ounces
Feed-Through:	

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1600	0.200	165	10	2	1500	250	0.200	1.7	235

\*Two tubes.

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# TETRODES AND PENTODE

## 4X150G

One of the forerunners in external-anode coaxial-based tetrodes, the 4X150G continues to deliver long life and high reliability in VHF and UHF applications. It is intended for use in CW service at frequencies up to 1200 megacycles and is useful in pulse service at frequencies up to 1500 megacycles.

**PLATE DISSIPATION** 150 watts  
**FREQUENCY FOR MAXIMUM RATINGS**  
 500 megacycles CW  
 1500 megacycles Pulsed  
**COOLING** Forced Air

**CHARACTERISTICS**  
 Cathode: Oxide-coated, unipotential  
 Heater: Voltage 2.5 volts  
 Current 6.2 to 7.3 amperes  
 Capacitances (Grounded Cathode):  
 Input 25.0 to 29.0 uufd  
 Output 4.0 to 4.9 uufd  
 Feed-Through 0.05 uufd  
 Base Coaxial  
 Max. Seal & Anode-Core Temp. 150 °C  
 Max. Height 2.750 inches  
 Max. Diameter 1.635 inches  
 Net Weight 6 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
B <sub>TV</sub>	Radio-Frequency Linear Amplifier — TV Visual Service	1250	0.250	150	12	2	1250	300	0.305*	9	250*
C	Plate-Modulated RF Power Amplifier	7000 pulse	**	150	12	2	7000 pulse	1000	6.0	1200 Mc. Osc.	17,000

\*Peak synchronizing level.

\*\*Maximum pulse cathode current, 7 amperes; maximum pulse duration, 5 microseconds.

## 4X250B

This 250-watt general-purpose external-anode tetrode is useful in many different applications where compactness and light weight are desirable features. It is equally suitable for audio-frequency, radio-frequency, or pulse service. Its maximum ratings allow an input power of 500 watts at frequencies up to 500 megacycles.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

**CHARACTERISTICS**  
 Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.0 volts  
 Current 2.3 to 2.9 amperes  
 Capacitances (Grounded Cathode):  
 Input 14.2 to 17.2 uufd  
 Output 4.0 to 5.0 uufd  
 Feed-Through 0.06 uufd  
 Base 9-pin, special Socket Eimac SK-600 series  
 Max. Base-Seal Temp. 175 °C  
 Max. Anode-Core Temp. 250 °C  
 Max. Height 2.464 inches  
 Max. Diameter 1.640 inches  
 Net Weight 4 ounces



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier — SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated RF Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

## 4X500A

This medium-power external-anode tetrode finds wide acceptance in FM broadcast service. The instant-heating filament of thoriated tungsten and the overall compactness are but two of the 4X500A's bonus features. Maximum ratings apply to 120 megacycles.

**PLATE DISSIPATION** 500 watts  
**FREQUENCY FOR MAXIMUM RATINGS**  
 120 megacycles — class-C CW  
 220 megacycles — class-B TV  
**COOLING** Forced Air

**CHARACTERISTICS**  
 Filament: Thoriated tungsten  
 Voltage 5.0 volts  
 Current 12.2 to 13.7 amperes  
 Capacitances (Grounded Cathode):  
 Input 10.6 to 14.4 uufd  
 Output 4.9 to 6.9 uufd  
 Feed-Through 0.1 uufd  
 Base 4-pin special Socket Eimac SK-900  
 Max. Anode-Core Temp. 150 °C  
 Max. Seal Temp. 150 °C  
 Max. Height 4.750 inches  
 Max. Diameter 2.625 inches  
 Net Weight 1.17 pounds



Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
B <sub>TV</sub>	Radio-Frequency Linear Amplifier — TV Visual Service	3000	0.350	500	30	10	2400	500	0.400*	25*	600*
C	Radio-Frequency Power Amplifier and Oscillator	4000	0.350	500	30	10	4000	500	0.315	5	835

\*Peak synchronizing level.

## 4E27A/5-125B

A general-purpose compact pentode cooled by radiation and convection and with maximum ratings applicable to 75 megacycles. No forced-air cooling is required in most installations.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 75 megacycles  
**COOLING** Radiation and Convection

**CHARACTERISTICS**  
 Filament: Thoriated tungsten  
 Voltage 5.0 volts  
 Current 7.0 to 8.0 amperes  
 Capacitances (Grounded Filament):  
 Input 8.7 to 12.3 uufd  
 Output 3.5 to 5.9 uufd  
 Feed-Through 0.1 uufd  
 Base 7-pin, metal shell Socket Johnson 122-237  
 Max. Seal Temp. 225 °C  
 Max. Height 6.188 inches  
 Max. Diameter 2.750 inches  
 Net Weight 6 ounces




Class of Operation	Type of Service	Maximum Ratings					Typical Operation					
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Supp. Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Freq. Power Amp. and Modulator	4000	0.200	125	20	20	—	2500	500	0.220*	0	300*
AB <sub>1</sub>	Audio-Freq. Power Amp. and Modulator	4000	0.200	125	20	20	5	2500	500	0.250*	0.2*	400*
C	Radio-Freq. Power Amp. and Oscillator—Zero Suppressor Volts	4000	0.200	125	20	20	5	3000	500	0.167	1.9	375
C	Plate-Mod. Radio-Freq. Amp.—Zero Suppressor Volts	3200	0.160	85	20	20	5	2500	500	0.152	2	295
C	Suppressor-Mod. Radio-Freq. Amp.	4000	0.200	125	20	20	5	3000	400	0.060	1.2	75

\*Two tubes.

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# PULSE MODULATORS



## 4PR60A

A high-vacuum, radial-beam tetrode intended for pulse-modulator service in circuits employing resistive loads. This tube unilaterally replaces the 715C and the 5D21.

**MAXIMUM PLATE VOLTAGE**  
20 kilovolts

**MAXIMUM PULSE PLATE CURRENT**  
18 amperes

**COOLING**  
Radiation & Convection

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
Heater:  
Voltage 26.0 volts  
Current 1.95 to 2.35 amperes  
Capacitances (Grounded Cathode):  
Input 35.0 to 50.0 uufd  
Output 6.0 to 11.0 uufd  
Feed-through 2.0 uufd  
Socket E. F. Johnson Co. No. 122-234  
Maximum Seal Temp. 200 °C  
Maximum Envelope Temp. 200 °C  
Maximum Length 6.0 inches  
Maximum Diameter 3.063 inches  
Net Weight 12 ounces

### MAXIMUM RATINGS

D-C PLATE VOLTAGE 20 kilovolts  
D-C SCREEN VOLTAGE 1.5 kilovolts  
PEAK PLATE CURRENT 18 amperes  
PLATE DISSIPATION 60 watts  
SCREEN DISSIPATION 8 watts

### TYPICAL OPERATION

D-C Plate Voltage 20 kilovolts  
D-C Screen Voltage 1.25 kilovolts  
Pulse Plate Voltage 19 kilovolts  
Pulse Plate Current 18 amperes  
Peak Drive Power 770 watts  
Peak Output Power 342 kilowatts  
Duty 0.1 percent



## 4PR400A

A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service. A new pulse modulator in the Eimac line, it is recommended for use in new equipments whenever long pulse lengths, high duty factors, or high voltages preclude the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE**  
20 kilovolts

**MAXIMUM PULSE PLATE CURRENT**  
4 amperes

**COOLING**  
Radiation & Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten  
Voltage 5.0 volts  
Current 13.5 to 14.7 amperes  
Capacitances (Grounded Cathode):  
Input 10.7 to 14.5 uufd  
Output 4.2 to 5.6 uufd  
Feed-through 0.17 uufd  
Base 5-pin metal shell  
Socket Eimac SK-400  
Max. Base-Seal Temp. 200 °C  
Max. Plate-Seal Temp. 225 °C  
Maximum Length 8.0 inches  
Maximum Diameter 5.5 inches  
Net Weight 9 ounces

### MAXIMUM RATINGS

D-C PLATE VOLTAGE 20 kilovolts  
D-C SCREEN VOLTAGE 2.5 kilovolts  
PEAK PLATE CURRENT 4 amperes  
PLATE DISSIPATION 400 watts  
SCREEN DISSIPATION 35 watts  
GRID DISSIPATION 10 watts

### TYPICAL OPERATION

D-C Plate Voltage 20 kilovolts  
D-C Screen Voltage 1.5 kilovolts  
Pulse Plate Voltage 19 kilovolts  
Pulse Plate Current 4 amperes  
Peak Drive Power 40 watts  
Peak Output Power 76 kilowatts  
Duty 1.5 percent



## 4PR1000A

A compact, high-vacuum, radial-beam tetrode incorporating a pyrovac plate and non-emitting grids, intended for pulse-modulator service. New to the Eimac line, this heavy-duty pulse modulator is recommended for use in new equipments where high voltage, high current, or high duty prevent the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE**  
30 kilovolts

**MAXIMUM PULSE PLATE CURRENT**  
8 amperes

**COOLING**  
Radiation & Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten  
Voltage 7.5 volts  
Current 20.0 to 22.7 amperes  
Capacitances (Grounded Cathode):  
Input 23.8 to 32.4 uufd  
Output 6.8 to 9.4 uufd  
Feed-through 0.35 uufd  
Base 5-pin metal shell  
Socket Eimac SK-500  
Max. Base-Seal Temp. 150 °C  
Max. Plate-Seal Temp. 200 °C  
Maximum Length 9.63 inches  
Maximum Diameter 5.25 inches  
Net Weight 1.5 pounds

### MAXIMUM RATINGS

D-C PLATE VOLTAGE 30 kilovolts  
D-C SCREEN VOLTAGE 2.5 kilovolts  
PEAK PLATE CURRENT 8 amperes  
PLATE DISSIPATION 1000 watts  
SCREEN DISSIPATION 75 watts  
GRID DISSIPATION 25 watts

### TYPICAL OPERATION

D-C Plate Voltage 30 kilovolts  
D-C Screen Voltage 1.5 kilovolts  
Pulse Plate Voltage 29.4 kilovolts  
Pulse Plate Current 8 amperes  
Peak Drive Power 900 watts  
Peak Output Power 235 kilowatts  
Duty 1.0 percent



## 6C21

A high-vacuum triode designed for pulse-modulator service and incorporating a pyrovac plate and a non-emitting grid. It is recommended for use where long-pulse requirements rule out the use of tubes employing oxide-coated cathodes.

**MAXIMUM PLATE VOLTAGE**  
30 kilovolts

**MAXIMUM PULSE PLATE CURRENT**  
15 amperes

**COOLING**  
Radiation & Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten  
Voltage 8.2 volts  
Current 15.9 to 17.7 amperes  
Capacitances:  
Grid-Plate 3.0 to 5.6 uufd  
Grid-Filament 7.0 to 12.0 uufd  
Plate-Filament 2.0 uufd  
Base 50-watt jumbo 4-pin  
Socket E. F. Johnson Co. No. 123-211 or National Co. XM-50  
Maximum Seal Temp. 225 °C  
Maximum Length 12.625 inches  
Maximum Diameter 5.125 inches  
Net Weight 1.3 pounds

### MAXIMUM RATINGS

D-C PLATE VOLTAGE 30 kilovolts  
PEAK PLATE CURRENT 15 amperes  
PLATE DISSIPATION 300 watts  
GRID DISSIPATION 50 watts

### TYPICAL OPERATION

D-C Plate Voltage 28 kilovolts  
Pulse Plate Voltage 25 kilovolts  
Pulse Plate Current 15 amperes  
Peak Drive Power 7.5 kilowatts  
Peak Output Power 375 kilowatts  
Duty 0.2 percent


**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# OTHER PRODUCTS

Supplementing the production of numerous electron tubes, Eitel-McCullough, Inc. offers many accessory items ranging from heat-radiating connectors to klystron amplifier circuit assemblies. These accessory products include special air-system sockets and chimneys to provide efficient cooling — a comprehensive listing of RF finger stock for use where sliding contacts are required — a high-vacuum diffusion pump suitable for laboratory or production service.

Klystron amplifier circuit assemblies, not shown in this catalog, are of primary importance to the equipment designer. These assemblies — allowing the most efficient operation of each Eimac klystron — include an air-system socket, a magnetic frame, magnetic focusing coils and tunable external RF cavities. Use of the proper assembly assures a complete, integrated Eimac klystron-amplifier package.

◆ Indicates new item

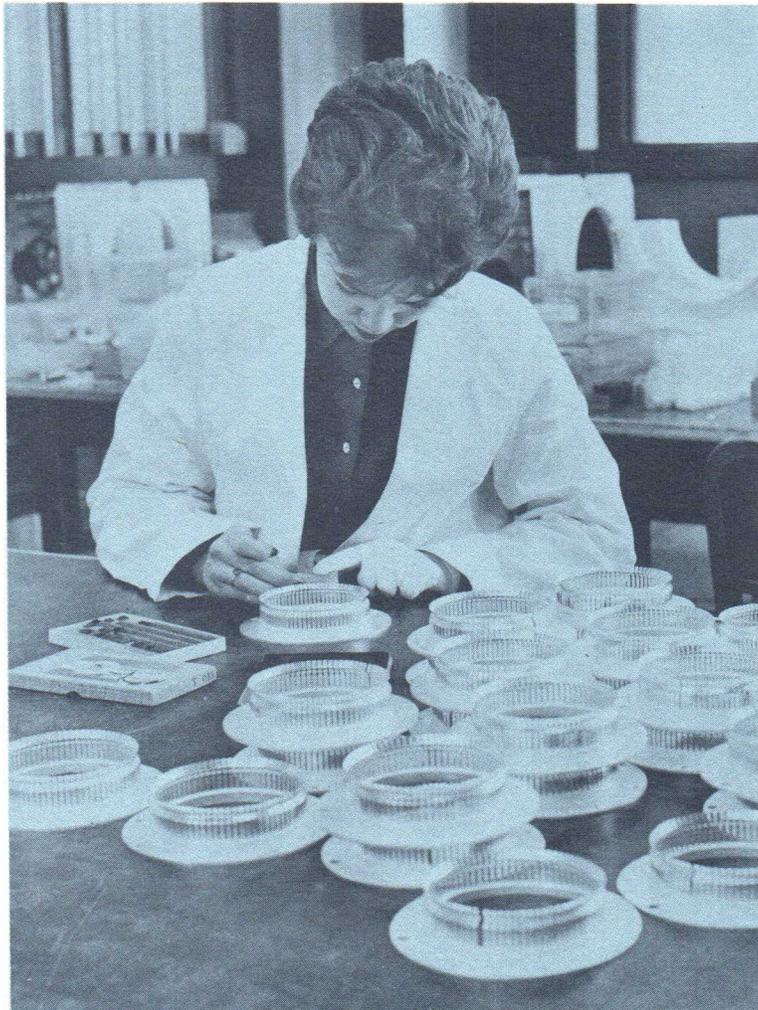

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

PULSE  
MODULATORS

OTHER  
PRODUCTS

# SOCKETS




**SK-300**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-300	4CX5000A 4CW10,000A	None	.....	None	SK-306



**SK-306**




**SK-400**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-400	4-400A 4-250A	None	.....	None	SK-406




**SK-406**



**SK-500**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-500	4-1000A	None	.....	None	SK-506



**SK-506**



**SK-602**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-602	4X150A 4X150D 4X250B 4CX250B 4CX250BA/7580 4CX250F 4W300B	2700	400	None	SK-606



**SK-606**



**SK-600  
SK-610**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-600	4X150A 4X150D 4X250B 4CX250B	2700	400	None	SK-606
SK-610	4CX250BA/7580 4CX250F 4W300B			Cathode	



**SK-606**



**SK-620  
SK-630**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-620	4X150A 4X150D 4X250B 4CX250B	1100	400	None	SK-626 SK-636
SK-630	4CX250BA/7580 4CX250F 4W300B			Cathode	



**SK-626**

**SK-636**



**SK-640**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-640	4X150A 4X150D 4X250B 4CX250B 4CX250BA/7580 4CX250F 4W300B	None	.....	None	.....

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# SOCKETS



**SK-655**  
**SK-650**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-650	4X150A 4X150D 4X250B 4CX250B	None	.....	None	None
SK-655	4CX250BA / 7580 4CX250F 4W300B	1100	400		SK-626

**SK-626**



**SK-700**  
**SK-710**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-700	4CN15A 4CX125C 4CX300A	1100	400	1 Heater	SK-606
SK-710				1 Heater Cathode	

**SK-606**



**SK-740**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-740	4CN15A 4CX125C 4CX300A	None	.....	None	.....



**SK-760**  
**SK-770**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-760	4CN15A 4CX300A	None	.....	None	Integral Chimney
SK-770				Screen	



**SK-800A**  
**SK-810**  
**SK-890**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-800A	4CW2000A 4CX1000A	1500	400	None	SK-806
SK-810				Cathode 1 Heater	
SK-890*					

**SK-806**



\*Screen bypass capacitor isolated from screen contacts.



**SK-900**

AIR-SYSTEM SOCKET	TUBE	SCREEN BYPASS CAPACITOR		GROUNDED CONTACTS	CHIMNEY
		CAPACITANCE (uufd)	VOLTAGE RATING (volts d-c)		
SK-900	4X500A	650	700	None	SK-906

**SK-906**



**SK-604A TUBE EXTRACTOR**

This new tube extractor is designed for use with Eimac planar triodes incorporating extracting holes in the top fin and with external-anode tetrodes of the 4X150, 4X250, and 4CX250 families. This extractor may also be used with tubes incorporating louvered coolers.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# OTHER PRODUCTS

## 100 IG IONIZATION GAUGE



Essentially a triode vacuum tube for measuring pressures from  $10^{-3}$  to less than  $10^{-8}$  mm of mercury, constructed of "hard" glass for sealing directly to nonex glass vacuum systems.

## HV-1 DIFFUSION PUMP



A fast, triple jet, air-cooled vacuum pump of the oil-diffusion type. When used with a suitable forepump and cold trap it is capable of reaching an ultimate vacuum better than  $10^{-7}$  mm of mercury.

Maximum Forepressure 0.02 mm Hg  
 Pumping Speed (without baffle)  
     67 liters per second  
     (4x10<sup>-4</sup> to 4x10<sup>-6</sup> mm Hg)  
 Heater Voltage 100 to 110 volts  
 Heater Current 1.7 amperes  
 Net Weight 6 pounds  
 Maximum Length 25 inches

## HEAT DISSIPATING CONNECTORS


Eimac HR Heat-Dissipating Connectors are used to make electrical connections to the plate and grid terminals of Eimac Tubes, and at the same time, provide efficient heat transfer from the tube element and glass seal to the air. These connectors are machined from solid dural rod and are supplied with the necessary machine screws.



TYPE	Length	Dia.	Hole Dia.
HR-1	11/16"	1/2"	.052"
HR-2	11/16"	1/2"	.062"
HR-3	11/16"	1/2"	.072"
HR-4	7/8"	3/4"	.102"
HR-5	7/8"	3/4"	.127"
HR-6	7/8"	3/4"	.367"
HR-7	1-11/32"	1-3/8"	.127"
HR-8	1-11/32"	1-3/8"	.575"
HR-9	4-11/32"	1-3/8"	.569"
HR-10	1-11/32"	1-3/8"	.510"

## RECOMMENDED CONNECTORS FOR USE WITH EACH EIMAC TUBE TYPE

TUBE	Plate Connector	Grid Connector	TUBE	Plate Connector	Grid Connector
2-25A	HR-1	....	25T	HR-1	....
2-50A	HR-3	....	35T	HR-3	....
2-150D	HR-6	....	35TG	HR-3	HR-3
2-240A	HR-6	....	75TH-TL	HR-3	HR-2
2-450A	HR-8	....	100TH-TL	HR-6	HR-2
2-2000A	HR-8	....	VT127A	HR-3	HR-3
3C24	HR-1	HR-1	250TH-TL	HR-6	HR-3
4-65A	HR-6	....	250R	HR-6	....
4-125A	HR-6	....	304TH-TL	HR-7	HR-6
4-250A	HR-6	....	450TH-TL	HR-8	HR-8
4-400A	HR-6	....	592/3-200A3	HR-10	HR-5
4-1000A	HR-8	....	750TL	HR-8	HR-8
4E27A/5-125B	HR-5	....	866A	HR-8	....
4PR60A	HR-8	....	872A	HR-8	....
6C21	HR-8	HR-8	1000T	HR-9	HR-9
KY21A	HR-3	....	1500T	HR-8	HR-8
RX21A	HR-3	....	2000T	HR-8	HR-8
			8020,100R)	HR-8	....



**VS-2, VS-4,  
VS-5, VS-6**

Eimac offers four vacuum switches intended primarily for r-f service. All have similar characteristics and similar ratings, though each differs from the others in some respect. They are rated at 20 kilovolts peak r-f in the "open" position. In the "closed" position, they can carry 7.5 amperes r-f current at frequencies to 15 megacycles, and 5 amperes from 15 to 30 megacycles. They are designed to be activated by a separate 12- or 24-volt coil, also available from Eitel-McCullough, Inc. The Application Engineering Department at the San Carlos offices should be contacted if additional data or specific recommendations are desired.

## VACUUM SWITCHES

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# OTHER PRODUCTS

## WATER LOADS

### WL-110

<b>MAX. AVG. POWER DISSIPATION</b>	15 kilowatts
<b>FREQUENCY RANGE</b>	450-1200 megacycles
<b>MAXIMUM VSWR</b>	1.28:1
<b>IMPEDANCE</b>	50 ohms

The WL-110 is designed to dissipate the r-f power directly into the coolant. The maximum VSWR listed above results from the use of distilled water. Use of other coolants, such as tap water or a 60/40 solution of ethylene glycol and distilled water, will result in a lower maximum VSWR.

### CHARACTERISTICS

R-F Coupling	3 1/8-inch AIE Flange
Coolant Connections	1 1/16" Am. Std. Hose
Maximum Outlet Coolant Temp.	65 °C
Water Flow at Max. Power (10 °C temp. rise)	5.7 gpm
Maximum Diameter	5.14 inches
Maximum Length	40.0 inches
Operating Position:	Horizontal or r-f input end down

### WL-120

<b>MAX. AVG. POWER DISSIPATION</b>	20 kilowatts
<b>FREQUENCY RANGE</b>	500-1200 megacycles
<b>MAXIMUM VSWR</b>	1.15:1
<b>IMPEDANCE</b>	50 ohms

The WL-120 is designed to dissipate the r-f power directly into the coolant. The maximum VSWR listed above results from the use of a 60/40 solution of ethylene glycol and distilled water. Use of tap water will result in a lower maximum VSWR.

### CHARACTERISTICS

R-F Coupling	3 1/8-inch AIE Flange
Coolant Connections	1 1/16" Am. Std. Hose
Maximum Static Coolant Pressure	90 psig
Maximum Outlet Coolant Temp.	65 °C
Water Flow at Max. Power (10 °C temp. rise)	10 gpm
Maximum Width	6.69 inches
Maximum Length	37.88 inches
Operating Position:	Horizontal or r-f input end down

### WL-130

<b>MAX. AVG. POWER DISSIPATION</b>	20 kilowatts
<b>FREQUENCY RANGE</b>	320-1200 megacycles
<b>MAXIMUM VSWR</b>	1.1:1

The WL-130 is designed to dissipate the r-f power directly into the coolant. The maximum VSWR listed above results from the use of a 60/40 solution of ethylene glycol and distilled water. Use of tap water will result in a lower maximum VSWR.

### CHARACTERISTICS

R-F Coupling	3 1/8-inch AIE Flange
Coolant Connections	1 1/16" Am. Std. Hose
Maximum Static Coolant Pressure	90 psig
Maximum Outlet Coolant Temp.	65 °C
Water Flow at Max. Power (10 °C temp. rise)	10 gpm
Maximum Diameter	6.69 inches
Maximum Length	79.94 inches
Operating Position:	Horizontal or r-f input end down

### WL-140

<b>MAX. AVG. POWER DISSIPATION</b>	20 kilowatts
<b>FREQUENCY RANGE</b>	225-1200 megacycles
<b>MAXIMUM VSWR</b>	1.15:1
<b>IMPEDANCE</b>	50 ohms

The WL-140 is designed to dissipate the r-f power directly into the coolant. The maximum VSWR listed above results from the use of a 60/40 solution of ethylene glycol and distilled water. Use of tap water will result in a lower maximum VSWR.

### CHARACTERISTICS

R-F Coupling	3 1/8-inch AIE Flange
Coolant Connections	1 1/16" Am. Std. Hose
Maximum Static Coolant Pressure	90 psig
Maximum Outlet Coolant Temp.	65 °C
Water Flow at Max. Power (10 °C temp. rise)	10 gpm
Maximum Diameter	6.69 inches
Maximum Length	151.94 inches
Operating Position:	Horizontal or r-f input end down

### WL-200

<b>MAX. AVG. POWER DISSIPATION</b>	24 kilowatts
<b>FREQUENCY RANGE</b>	1700-2400 megacycles
<b>MAXIMUM VSWR</b>	1.1:1

The WL-200 is designed to dissipate the r-f power directly into the coolant. The maximum VSWR listed above results from the use of distilled water. Use of a different coolant, such as a 60/40 solution of ethylene glycol and distilled water, will result in a lower maximum VSWR.

### CHARACTERISTICS

R-F Coupling	RG-104/U waveguide
Coolant Connections	3/8-18 pipe thread
Maximum Static Coolant Pressure	30 psig
Maximum Outlet Coolant Temp.	65 °C
Water Flow at Max. Power (15 °C temp. rise)	6 gpm
Maximum Width	8.9 inches
Maximum Height	4.3 inches
Maximum Length	37.6 inches
Operating Position:	Axis horizontal or vertical (r-f input end down).


APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.

# DEVELOPMENTAL TUBES

Immediate customer needs continually affect product planning at Eitel-McCullough, Inc. Extending the capabilities of electron-power tubes, Eimac constantly meets the expanding requirements of systems designers throughout the world. Complete vacuum-tube development facilities enable Eimac to either improve existing products or advance totally new design concepts in its approach to specific customer projects.

Experimental tubes presently under development will be in future quantity production. Listed as X-numbered items in the catalog, these tubes are available on a limited basis. Y-numbered tubes and accessories are also available on special order.

◆ Indicates new item

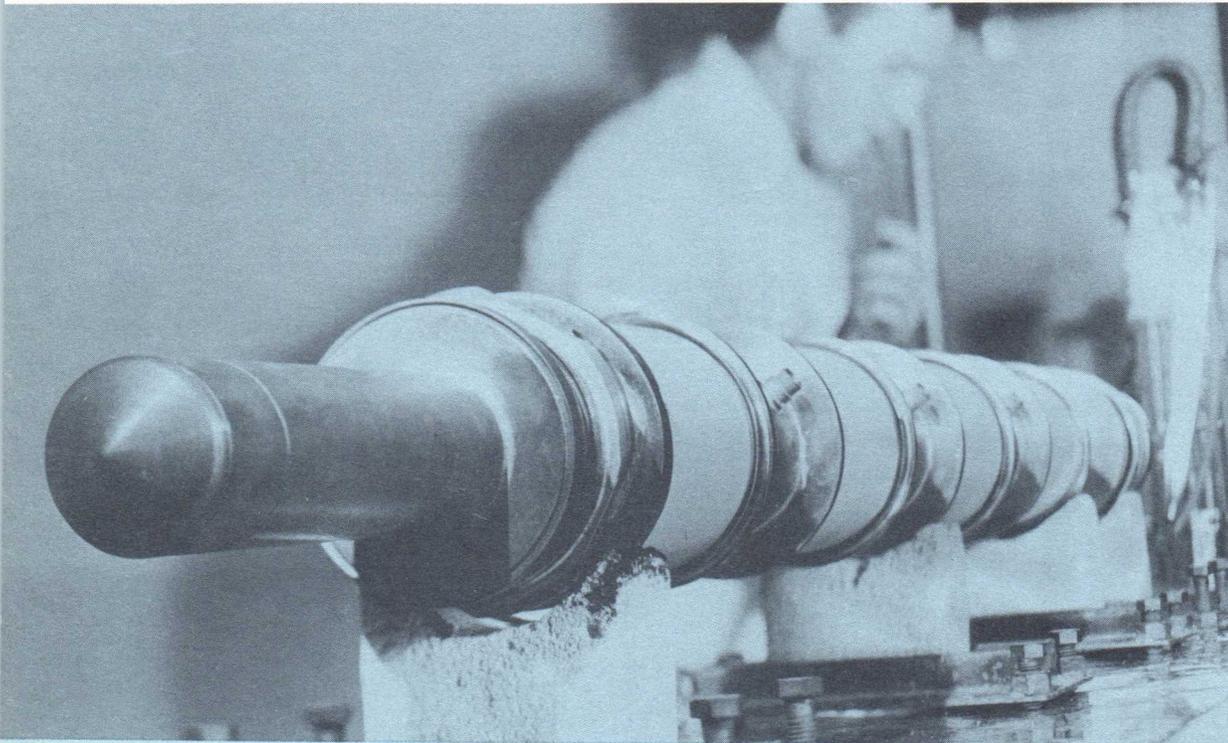

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# DEVELOPMENTAL TUBES



## X602K

The X-602K is a ceramic and metal, four-cavity, magnetically-focused, pulse amplifier klystron employing the Eimac Modulating Anode. The electrical characteristics of the X-602K for CW operation are similar to those of the 4KM170,000LA.

The external-cavity design permits a wide tuning range and allows repeated tuning operations without damage to the vacuum seals.

The Eimac Klystron Amplifier Circuit Assembly (H-128) has been designed for use with this tube to cover the specified frequency range.

## AMPLIFIER KLYSTRONS

### FREQUENCY RANGE

375 - 500 Mc

### MINIMUM PULSE OUTPUT POWER

150 kilowatts

### MINIMUM AVERAGE OUTPUT POWER

50 kilowatts

### TYPICAL POWER GAIN

45 db

### CHARACTERISTICS

Cathode:	Eimac Matrix, unipotential
Heater:	
Voltage	11.0 volts
Current	47.5 amperes
RF Connections:	
Input	50-ohm Type N
Output	6 1/8 inch 50-ohm line
Net Weight (Tube)	196 pounds
Net Weight (Circuit Assembly)	1792 pounds
Maximum Dimensions (Tube):	
Length	89.13 inches
Diameter	9.51 inches
Maximum Dimensions (Tube and Circuit Assembly):	
Length	103.0 inches
Diameter	38.25 inches
Cooling	Liquid and Forced Air

### MAXIMUM PULSE RATINGS

D-C BEAM VOLTAGE	50 kv
PEAK MOD. ANODE VOLTAGE	50 kVdc
D-C FOCUS ELECTRODE VOLTAGE	-1000 Vdc
D-C BODY CURRENT	250 mAcd
COLLECTOR DISSIPATION	170 kW
PEAK BEAM CURRENT	9.0 a
AVERAGE BEAM CURRENT	5.0 Adc

### TYPICAL OPERATIONS (Pulse Amplifier)

RF Frequency	390 Mc
Peak Output Power	155 kw
Drive Power	3.0 W
Average Output Power	34 kW
D-C Beam Voltage	45 kVdc
D-C Beam Current	1.69 Adc
Peak Mod. Anode Voltage	45 kv
Peak Beam Current	7.7 a



## X632

The X-632 is a ceramic and metal, four-gap, internal-cavity, pulse-amplifier klystron designed for the high-power, low-duty service encountered in linear accelerator or radar applications.

The fixed output coupling is pre-adjusted to provide optimum output power when the klystron is operated in linear accelerator or radar service.

The Eimac Klystron Circuit Assembly for the X-632 includes the necessary electro-magnetic focusing coils, the magnetic frame, klystron mount, socket and other hardware essential to the operation of this tube.

### FREQUENCY RANGE

2845 - 2865 Mc

### PULSE CW OUTPUT POWER

10 megawatts

### TYPICAL POWER GAIN

45 db

### CHARACTERISTICS

Cathode:	Oxide coated, unipotential
Heater:	
Voltage	11 volts
Current	25 amperes
Getter:	
Voltage	6 volts
Current	33 amperes
RF Connections:	
Input	50-ohm Type N
Output	WR-284 waveguide
Maximum Dimensions (Tube):	
Length	53.19 inches
Diameter	15.0 inches
Maximum Dimensions (Tube and Circuit Assembly):	
Length	53.19 inches
Diameter	31 inches
Cooling	Liquid and forced air

### SPECIFICATIONS

PULSE BEAM VOLTAGE	235 kv
COLLECTOR DISSIPATION	40 kW
PULSE BEAM CURRENT	105 a
PULSE LENGTH	6 - 10 μsec
DUTY	0.167 %
EFFICIENCY	40 %



## X700

The Eimac X-700 is a four-cavity, ceramic and metal, magnetically focused, pulse power - amplifier klystron designed for use under conditions of severe environmental extremes. The resonant cavities of this tube are an integral part of the klystron structure, but are completed and tuned outside the vacuum envelope.

The output cavity loading is adjustable by means of a variable iris.

This klystron employs the Eimac Modulating Anode which provides a convenient means of pulse modulating the output without changing the beam voltage.

### FREQUENCY RANGE

2400 - 2900 Mc

### MINIMUM PULSE OUTPUT POWER

20 kilowatts

### TYPICAL POWER GAIN

40 db

### CHARACTERISTICS


Cathode:	Oxide-coated, unipotential
Heater:	
Voltage	7.5 volts
Current	5.5 amperes
RF Connections:	
Input	50-ohm TNC
Output	WR-284 waveguide
Net Weight (Tube):	39 pounds
Net Weight (Circuit Assembly):	160 pounds
Maximum Dimensions (Tube):	
Length	24 inches
Diameter	7 inches
Maximum Dimensions (Tube and Circuit Assembly):	
Length	24 inches
Diameter	17 inches
Cooling	Forced air

### TENTATIVE MAXIMUM RATINGS

D-C BEAM VOLTAGE	28 kVdc
PEAK MOD. ANODE VOLTAGE	14 kv
D-C FOCUS ELECTRODE VOLTAGE	-500 Vdc
COLLECTOR DISSIPATION	2500 W

### TYPICAL OPERATION (Pulse Amplifier)

RF Frequency	2500 Mc
Peak Output Power	20 kW
Average Output Power	1 kW
Drive Power	2 W
D-C Beam Voltage	21 kVdc
D-C Beam Current	0.138 Adc
Peak Mod. Anode Voltage	10.5 kv
Peak Beam Current	2.77 A
Duty	5 %
Pulse Length	50 μsec



## X563K, L, M

The X-563 series tubes are ceramic and metal, four-gap, internal-cavity, power-amplifier klystrons designed primarily to extend the range and increase the reliability of existing microwave communication systems.

Each resonant cavity is tuned by means of a single, dielectric slug-tuner with a tuning rate of approximately 35 megacycles per turn.

The Eimac Klystron Amplifier Circuit Assembly designed for this klystron includes the electro-magnetic coils, magnetic frame, socket and other hardware essential to the operation of this tube.

### FREQUENCY RANGE

X-563L 5400 - 5800 Mc

X-563M 5900 - 6400 Mc

X-563K 6500 - 7100 Mc

### MINIMUM CW OUTPUT POWER

50 watts

### TYPICAL POWER GAIN

35 db

### CHARACTERISTICS

Cathode:	Oxide-coated, unipotential
Heater:	
Voltage	6.3 volts
Current	1.0 ampere
R-F Connections:	
Input	Type BNC
Output	WR-137 waveguide
Net Weight:	
Klystron	3 pounds
Circuit Assembly	16 pounds
Maximum Dimensions (Klystron):	
Length (with waveguide)	7.5 inches
Width	6.25 inches
Depth	6.25 inches
Maximum Dimensions (Klystron in circuit assembly):	
Length	9.5 inches
Diameter	8.25 inches
Cooling	Forced air

### MAXIMUM RATINGS

D-C BEAM VOLTAGE	3000 Vdc
D-C BEAM CURRENT	150 mAcd
D-C FOCUS ELECTRODE VOLTAGE	-125 Vdc
D-C BODY CURRENT	25 mAcd
COLLECTOR DISSIPATION	450 W

### TYPICAL OPERATION (Broad-Band, CW Amplifier)

Output Power	60 W
Drive Power	20 mW
D-C Beam Voltage	3000 Vdc
D-C Beam Current	130 mAcd
3-db Band-Width	
X-563L	9 Mc
X-563M	10 Mc
X-563K	13 Mc

FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.

# DEVELOPMENTAL TUBES

## AMPLIFIER KLYSTRONS



### X768

The X768 is a ceramic and metal, three-cavity, magnetically-focused, wide-band, klystron amplifier designed for tropo-scatter communication applications, where high reliability is essential. The klystron gain has been adjusted so that, under better than average propagation conditions, the X768 driver power alone will be sufficient to support the circuit.

Adjustable cavity loading, external to the vacuum envelope, is provided for realizing the required band-width and for compensating for the effects of load mismatches.

The Eimac Klystron Circuit Assembly for the X768 includes the necessary electro-magnetic focusing coils, magnetic frame, klystron mount, socket, and other components required to complete an amplifier package, with the exception of power supplies, control circuits, and metering.

### TENTATIVE SPECIFICATIONS

Frequency range	755 - 985 Mc
CW Output Power	50 - 75 Kw
Three-db Bandwidth	7 Mc
Maximum Beam Voltage	30 kVdc
Efficiency	35 Percent
Focusing	Electro-magnetic
Number of Cavities	3
Input Coupling	3 1/8 inch 50-ohm line
Output Coupling	WR-975 waveguide
Cooling	Liquid and forced air

## REFLEX KLYSTRON

### Y-222



The Y-222 is a special version of the ruggedized, ceramic and metal 1K20-series reflex klystrons. This tube was designed primarily for use in mobile and fixed-station commercial carrier-system applications, and is capable of delivering a minimum output power of 70 milliwatts over the frequency range of 10.5-10.7 kilomegacycles.

### Y-179

## DIODE



This close-spaced planar diode has been employed as a T-R switch tube in several high-power radar equipments. It is similar in appearance and construction to the familiar 2C39A but a new and unusual cathode material is employed. This EMA (Eimac matrix) cathode has excellent high-frequency characteristics and also is not easily damaged by internal sparking.

More detailed specifications and specific application data are available on request.

## TRIODES

### X762

Here is a new ceramic-metal medium-mu (20) triode designed for industrial-heating oscillator service. It features a large thoriated-tungsten filament with ample reserve emission and an integral anode cooler with the inherent ability to withstand large overloads. It is intended for use through 110 megacycles, or as a grounded-grid F-M amplifier developing 20 kilowatts useful output power.

**PLATE DISSIPATION** 10,000 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 110 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Filament: Thoriated tungsten	Base	Coaxial
Voltage 7.5 volts	Socket	Eimac X615A
Current 102 amperes	Max. Seal Temp.	250 °C
Capacitances:	Max. Anode-Core Temp.	250 °C
Grid-Filament 60 uuf	Max. Height	8.25 inches
Grid-Plate 40 uuf	Max. Diameter	7.00 inches
Plate-Filament 0.2 uuf	Net Weight	12 pounds

Class of Operation	Type of Service	Maximum Ratings			Typical Operation			
		Plate Voltage (volts)	Plate Current (amps)	Plate Diss. (watts)	Plate Voltage (volts)	Plate Current (amps)	Drive Power (watts)	Output Power (watts)
C	Industrial Oscillator — 110 mc	7000	4.0	10,000	7000	4.0	—	20,000
C	F-M Amplifier — Grounded Grid	7000	4.0	10,000	7000	4.0	3700	23,000
B	Linear Amplifier, Peak Envelope Conditions, Grounded Grid	7000	4.0	10,000	7000	4.0	2000	20,000
C	Plate-Modulated R-F Amplifier, Carrier Conditions	5000	3.0	10,000	5000	3.0	450	11,400

### X685C

This version of the 3CX100A5 features an extended grid-anode ceramic insulator and consequently may be employed at maximum ratings at altitudes up to 70,000 feet. It is intended for use in airborne equipments where the combination of altitude and pulse voltages precludes the use of the standard 3CX100A5.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Coaxial
Heater:	Max. Seal Temp.	250 °C
Voltage 6.0 volts	Max. Anode-Core Temp.	250 °C
Current 0.90 to 1.05 amperes	Capacitances:	
Grid-Cathode 5.6 to 7.0 uuf	Max. Height	2.7 inches
Grid-Plate 1.95 to 2.15 uuf	Max. Diameter	1.264 inches
Plate-Cathode 0.035 uuf	Net Weight	2.6 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amps)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	1000	0.125	100	2	900	0.090	—	15
C	Grid-Pulsed Operation	1200	2 (peak)	100	2				
C	Plate-Pulsed Operation	3500	2 (peak)	100	2				

### X779

This special tube type, utilizing a 26.5-volt heater, is otherwise identical to the famous Eimac 3CX100A5. Here too, tight dimensional tolerances and exacting electrical testing result in greater uniformity than that found in other UHF planar triodes.

**PLATE DISSIPATION** 100 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 2500 megacycles  
**COOLING** Forced Air

### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Coaxial
Heater:	Max. Seal Temp.	250 °C
Voltage 26.5 volts	Max. Anode-Core Temp.	250 °C
Current 0.225 ampere	Capacitances:	
Grid-Cathode 5.6 to 7.0 uuf	Max. Height	2.701 inches
Grid-Plate 1.95 to 2.15 uuf	Max. Diameter	1.264 inches
Plate-Cathode 0.035 uuf	Net Weight	2.5 ounces

Class of Operation	Type of Service	Maximum Ratings				Typical Operation			
		Plate Voltage (volts)	Cathode Current (amp)	Plate Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator—500 megacycles	1000	0.125	100	2	800	0.080	6	27
C	Radio-Frequency Power Amplifier and Oscillator—2500 megacycles	1000	0.125	100	2	900	0.090	—	15
C	Plate-Modulated Radio-Frequency Power Amplifier and Oscillator—500 megacycles	600	0.100	70	2	600	0.065	5	16

**APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH PRODUCT DESIGN AND EXPERIMENTATION.**

# DEVELOPMENTAL TUBES

## TETRODES

### X578G

This special 4CX300A features a 26.5-volt heater which makes it an ideal choice for use in many applications, such as rockets, missiles, etc., where this supply voltage plus shock and vibration are to be found. Its internal construction is such that reliable operation is obtained at high levels of acceleration.

**PLATE DISSIPATION** 300 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Special, breechblock
Heater:	Socket	Eimac SK-700 series
Voltage 26.5 volts	Max. Seal Temp.	250 °C
Current 0.68 ampere	Max. Anode-Core Temp.	250 °C
Capacitances (Grounded Cathode):	Max. Height	2.5 inches
Input 25 to 33 uufd	Max. Diameter	1.65 inches
Output 3.5 to 4.5 uufd	Net Weight	4 ounces
Feed-Through 0.06 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2500	0.250	300	12	—	2500	350	0.500*	0	800*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2500	0.250	300	12	—	2500**	350	0.250	0	400
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	300	12	2	2500**	250	0.250	2.8	500
C	Plate-Modulated R-F Power Amplifier	1500	0.200	200	12	2	1500	250	0.200	1.7	235

\*Two tubes. \*\*Below 250 mc only.

### X578H

A special version of the 4CX125C featuring a 26.5-volt heater for use where this supply voltage is desirable or necessary. Its other electrical and physical characteristics are identical to those of the 4CX125C. It is particularly suitable for service where shock and/or vibration are experienced, as in rockets, missiles, etc.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Special, breechblock
Heater:	Socket	Eimac SK-700 series
Voltage 26.5 volts	Max. Seal Temp.	250 °C
Current 0.68 ampere	Max. Anode-Core Temp.	250 °C
Capacitances (Grounded Cathode):	Max. Height	2.50 inches
Input 25 to 33 uufd	Max. Diameter	1.25 inches
Output 3.5 to 4.5 uufd	Net Weight	3.5 ounces
Feed-Through 0.06 uufd		

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	125	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1500	0.200	80	12	2	1500	250	0.200	1.7	235

### X578J

This ceramic and metal tetrode has electrical and physical characteristics identical to those of the 4CN15A with the exception of heater voltage (26.5 volts) and current (0.68 ampere). Like the 4CN15A, it is also designed for use in low-duty pulse applications or others where size and weight are important factors.

#### PLATE DISSIPATION

15 watts

**FREQUENCY FOR MAXIMUM RATINGS**  
 500 megacycles

**COOLING**  
 Convection

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential	Base	Special, breechblock
Heater:	Socket	Eimac SK-700 series
Voltage 26.5 volts	Maximum Seal Temp.	250 °C
Current 0.68 ampere	Max. Anode-Core Temp.	250 °C
Capacitances (Grounded Cathode):	Maximum Height	2.5 inches
Input 25 to 33 uufd	Maximum Diameter	0.894 inch
Output 3.5 to 4.5 uufd	Net Weight	2.5 ounces
Feed-Through 0.06 uufd		

### X593V

This ceramic-metal tetrode has internal spacings which allow its use in pulse-modulator applications. Additionally, its external forced-air-cooled anode makes it suitable for service where a high duty factor prevents the use of conventional pulse modulators. Its internal construction is exceptionally strong and features an integrated cathode, control grid, and screen grid. It should be considered for use wherever shock, vibration, or high temperatures are expected and when a pulse current of less than 18 amperes is demanded.

More detailed specifications and specific application data are available on request.

**EIMAC PRODUCTS ARE STOCKED BY DISTRIBUTORS IN EVERY MAJOR CITY THROUGHOUT THE COUNTRY.**

# DEVELOPMENTAL TUBES

## TETRODES

### X651H



This version of the new 7580 ceramic and metal tetrode employs a 26.5-volt heater. Accordingly, it is especially recommended for applications where this supply voltage plus the high-gain characteristics of the 7580 are requisites.

**PLATE DISSIPATION** 250 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 26.5 volts, Current 0.68 ampere  
 Capacitances (Grounded Cathode):  
 Input 16.0 to 18.5 uufd  
 Output 9.0 to 5.0 uufd  
 Feed-Through 0.06 uufd

Base 9-pin, special  
 Socket Eimac SK-600 series  
 Max. Seal Temp. 250 °C  
 Max. Anode-Core Temp. 250 °C  
 Max. Height 2.464 inches  
 Max. Diameter 1.640 inches  
 Net Weight 4 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
AB <sub>1</sub>	Audio-Frequency Power Amplifier and Modulator	2000	0.250	250	12	—	2000	350	0.500*	0	600*
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	250	12	—	2000	350	0.250	0	300
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	250	12	2	2000	350	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1500	0.200	165	12	2	1500	250	0.200	1.7	235

\*Two tubes.

### Y-169



This special version of the horizontally-finned 4CX125C is nickel and rhodium plated to allow its immersion in liquids which are corrosive to silver. Of course, it may be used with forced-air cooling, in which case its plate dissipation rating is 125 watts. Its internal construction makes it a good choice for applications where shock and/or vibration are encountered.

**PLATE DISSIPATION** 125 watts  
**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Forced Air

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.0 volts, Current 2.2 to 3.2 amperes  
 Capacitances (Grounded Cathode):  
 Input 25 to 33 uufd  
 Output 3.5 to 4.5 uufd  
 Feed-Through 0.06 uufd

Base Special, breechblock  
 Socket Eimac SK-700 series  
 Max. Seal Temp. 250 °C  
 Max. Anode-Core Temp. 250 °C  
 Max. Height 2.50 inches  
 Max. Diameter 1.25 inches  
 Net Weight 3.5 ounces

Class of Operation	Type of Service	Maximum Ratings					Typical Operation				
		Plate Voltage (volts)	Plate Current (amp)	Plate Diss. (watts)	Screen Diss. (watts)	Grid Diss. (watts)	Plate Voltage (volts)	Screen Voltage (volts)	Plate Current (amp)	Drive Power (watts)	Output Power (watts)
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	125	12	2	2000	250	0.250	2.9	390
C	Plate-Modulated R-F Power Amplifier	1500	0.200	80	12	2	1500	250	0.200	1.7	235

### Y-210



A special version of the ceramic and metal 4CX250B intended for use where small size and light weight are important. It may be cooled by liquid immersion or by the use of a suitable heat sink; maximum allowable plate dissipation is determined by the adequacy of the cooling supplied but in no case should it exceed 250 watts.

**FREQUENCY FOR MAXIMUM RATINGS** 500 megacycles  
**COOLING** Convection

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 6.0 volts, Current 2.3 to 2.9 amperes  
 Capacitances (Grounded Cathode):  
 Input 14.2 to 17.2 uufd  
 Output 4.0 to 5.0 uufd  
 Feed-Through 0.06 uufd

Base 9-pin special  
 Socket Eimac SK-600 series  
 Max. Seal Temp. 250 °C  
 Max. Anode-Core Temp. 250 °C  
 Max. Height 2.46 inches  
 Max. Diameter 1.64 inches  
 Net Weight 3 ounces

Class of Operation	Type of Service	Maximum Ratings			
		Plate Voltage (volts)	Plate Current (amp)	Screen Diss. (watts)	Grid Diss. (watts)
AB <sub>1</sub>	Radio-Frequency Linear Power Amplifier—SSB	2000	0.250	12	2
C	Radio-Frequency Power Amplifier and Oscillator	2000	0.250	12	2

## PULSE MODULATOR

### X629



This very-high- $\mu$  triode, designed for use in klystron switch-tube applications, represents a new answer to the requirement for a high-voltage tube with moderate current-carrying capability. Its modulating anode, while requiring fairly high drive voltage, demands little in the way of drive power. It is usually cooled by immersion in oil or other suitable insulating liquid.

**MAXIMUM COLLECTOR VOLTAGE**  
 120 kilovolts

**MAXIMUM PEAK CATHODE CURRENT**  
 5 amperes

**COOLING**  
 Oil Immersion

#### CHARACTERISTICS

Cathode: Oxide-coated, unipotential  
 Heater: Voltage 7.5 volts, Current 5.5 amperes  
 Capacitances:  
 Input (approx.) 10 uufd  
 Output (approx.) 2.5 uufd  
 Base Special, concentric  
 Recommended Socket SK-200  
 Maximum Temperature 120 °C  
 Max. Length (approx.) 12 inches  
 Max. Diameter (approx.) 5 inches  
 Net Weight 4.9 pounds

#### MAXIMUM RATINGS

Collector Voltage 120 kVdc  
 Mod. Anode Voltage 15 kV  
 Focus Electrode Voltage -200 Vdc  
 Cathode Current:  
 Peak 5.0 a  
 Average 500 mAdc  
 Av. Collector Diss. 500 W  
 Av. Modulating Anode Dissipation 25 W

#### TYPICAL OPERATION

Collector Voltage 60 kVdc  
 Modulator Anode Voltage 6.6 kv  
 Focus Electrode Voltage -100 Vdc  
 Cathode Current:  
 Peak 1.5 a  
 Average 5 mAdc  
 Av. Collector Diss. 50 W  
 Tube Drop 700 Vdc

**FIELD ENGINEERS WILL ASSIST YOU IN SELECTION AND APPLICATION OF ALL EIMAC PRODUCTS.**

# DEVELOPMENTAL TUBES



## X643F

This pulse-modulator tetrode has been designed for use where severe vibration and/or shock are encountered. Its electrical characteristics are similar to those of the widely accepted 4PR60A with the exception of heater voltage, which is 6.0 volts versus 26.5 volts. Physically, the tubes are also similar; however, differences in internal construction have resulted in the improved environmental characteristics. Externally, base pins have been shortened to allow improved socketing.

Maximum ratings for the X643F are comparable to those for the 4PR60A. Cooling is by radiation and convection in most installations.

## PULSE MODULATORS



## Y-158

A 50-kilovolt tetrode for use in pulse-modulator and switch-tube applications. The Y-158 has a 250-watt plate dissipation rating and is capable of supplying pulses of four amperes and nearly 50 kilovolts to a resistive load. It is recommended for use in new equipments.

**MAXIMUM PLATE VOLTAGE**  
50 kilovolts

**MAXIMUM PULSE PLATE CURRENT**  
4 amperes

**COOLING**  
Radiation and Forced Air

## CHARACTERISTICS

Filament:	Thoriated tungsten
Voltage	5.0 volts
Current	13.5 to 14.7 amperes
Capacitances:	
Input	11 to 15 uufd
Output	2.7 to 3.7 uufd
Feed-Through	0.15 uufd
Socket	E. F. Johnson Co. No. 122-275
Max. Plate-Seal Temp.	200 °C
Max. Envelope Temp.	200 °C
Max. Length	7.5 inches
Max. Diameter	3.5 inches
Net Weight	12.5 ounces

## MAXIMUM RATINGS

D-C PLATE VOLTAGE	50 kVdc
D-C SCREEN VOLTAGE	2 kVdc
PEAK PLATE CURRENT	4 a
PLATE DISSIPATION	250 W
SCREEN DISSIPATION	25 W
GRID DISSIPATION	5 W

## TYPICAL OPERATION

D-C Plate Voltage	49.7 kVdc
D-C Screen Voltage	1 kVdc
Pulse Plate Voltage	48 kV
Pulse Plate Current	4 a
Peak Drive Power	415 W
Peak Output Power	192 kw
Duty	1.7 %



## X778

The Eimac X778 is a ruggedized, ceramic and metal, periodic-permanent-magnet focused, power-amplifier traveling-wave tube. The use of temperature-compensated permanent magnets permits operation of this tube under conditions of temperature extremes without degradation of performance.

## TRAVELING WAVE TUBE

**FREQUENCY RANGE**  
5.0 to 11.0 kMc

**MINIMUM CW OUTPUT POWER**  
1 watt

**SMALL SIGNAL POWER GAIN**  
60 db

## CHARACTERISTICS

Cathode:	Oxide-coated, unipotential
Heater:	
Voltage	6.3 volts
Current	0.6 ampere
Focusing:	Periodic permanent magnets
Noise Figure	25 to 34 db
R-F Connectors:	
Input	Type TNC
Output	Type TNC
Maximum Dimensions:	
Length	16.25 inches
Diameter	3.0 inches
Net Weight	6.0 pounds
Cooling	Conduction

## MAXIMUM RATINGS

ANODE VOLTAGE	3000 Vdc
CATHODE CURRENT	30 mAdc
FOCUS ELECTRODE VOLTAGE	-100 Vdc

## TYPICAL OPERATION

Frequency	7500 Mc
Anode Voltage	2700 Vdc
Power Output	1.0 watts
Cathode Current	26 mAdc
Collector Current	22 mAdc
Focus Electrode Voltage	-10 Vdc

## VOLTAGE TUNEABLE MAGNETRON

## X747

The X-747 is a ruggedized, voltage tuneable magnetron capable of providing a minimum output power of 100 millivolts over the frequency range of 400 to 1000 megacycles. This tube may be used as a swept oscillator in test equipments or in military applications encountering severe environmental conditions.

The all metal and ceramic construction results in a compact, lightweight unit suitable for use in airborne applications.



PRINTED IN U.S.A./700

APPLICATION ENGINEERS AT EIMAC WILL HELP YOU WITH  
PRODUCT DESIGN AND EXPERIMENTATION.

