









Photos, AC-100/PO Clone




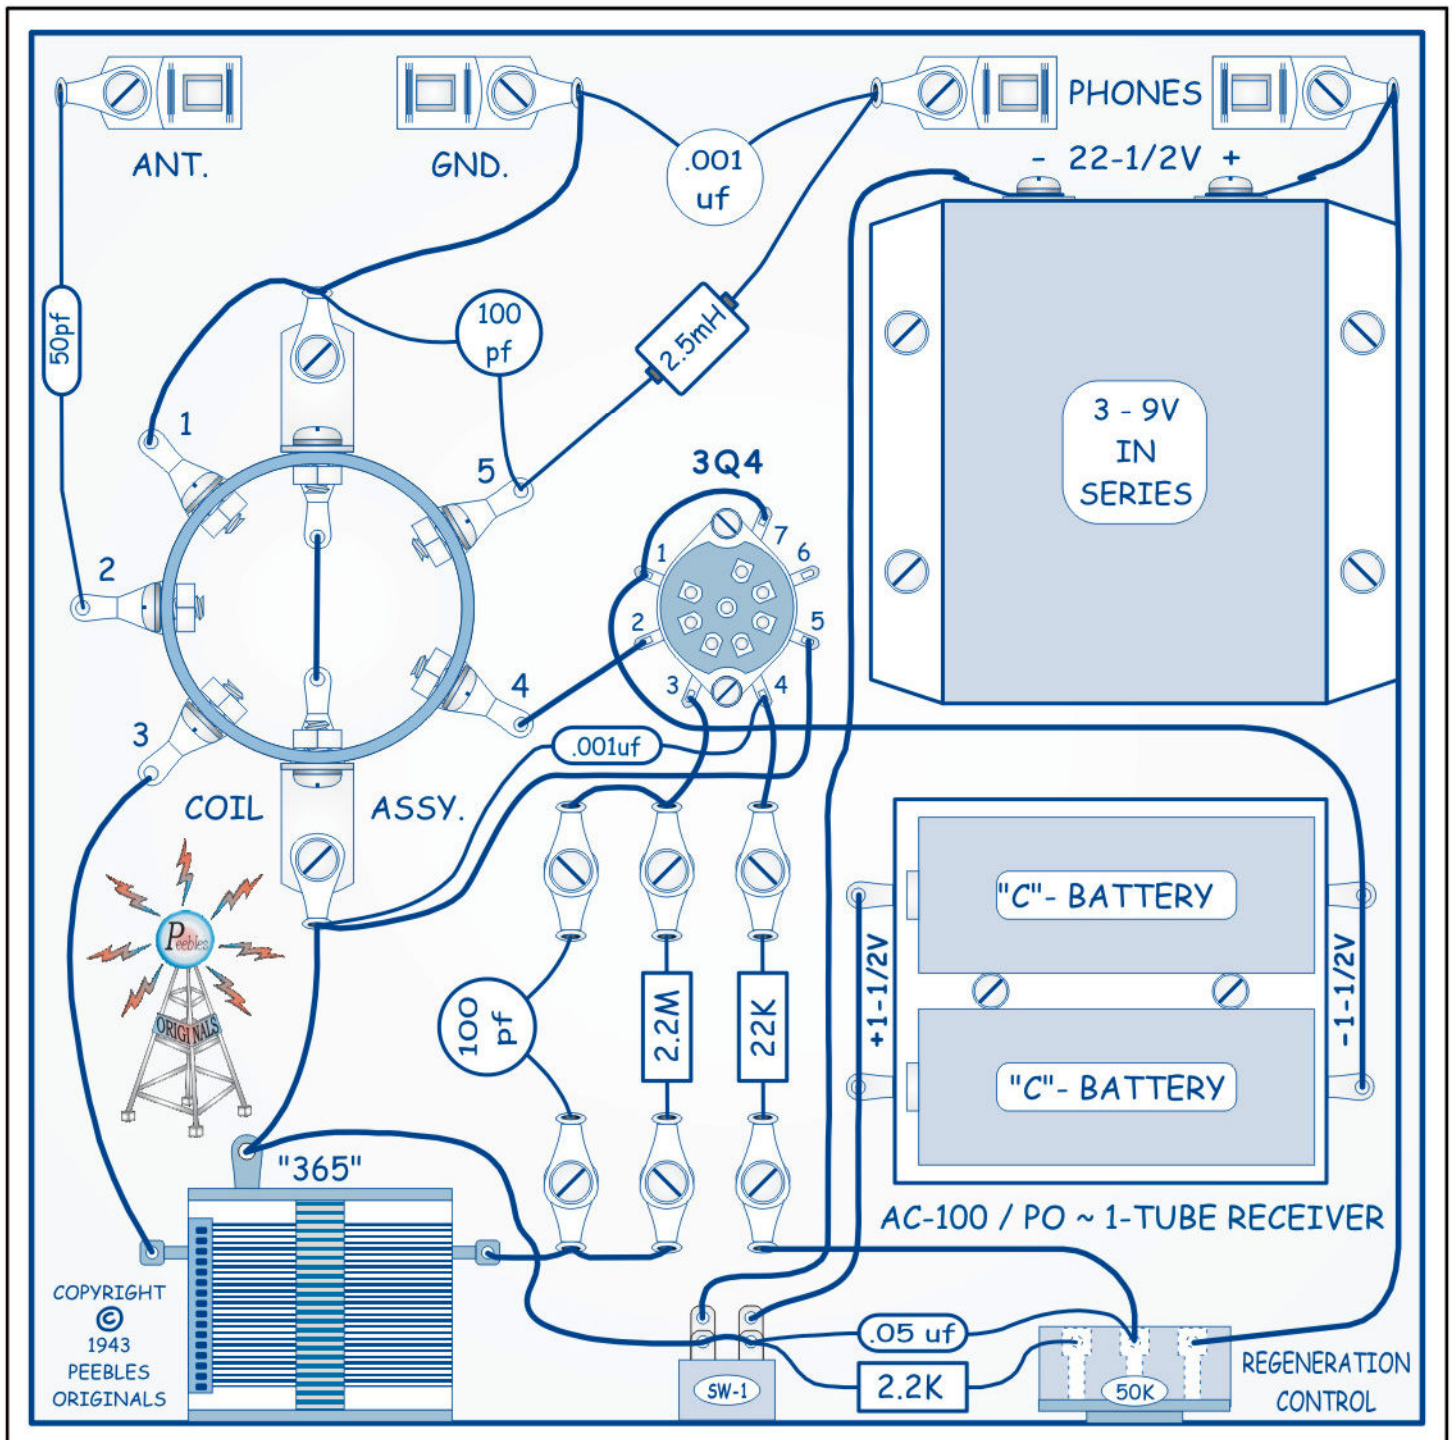

**Chassis Part's Placement, Template, Full-Size.**

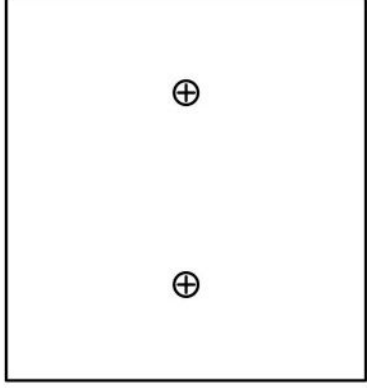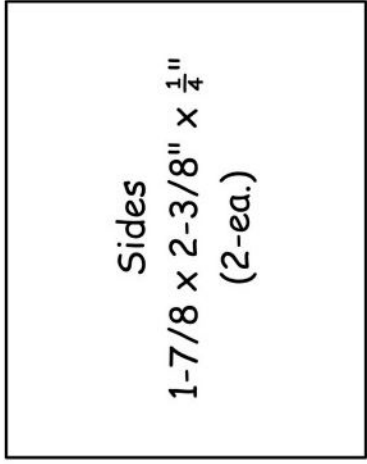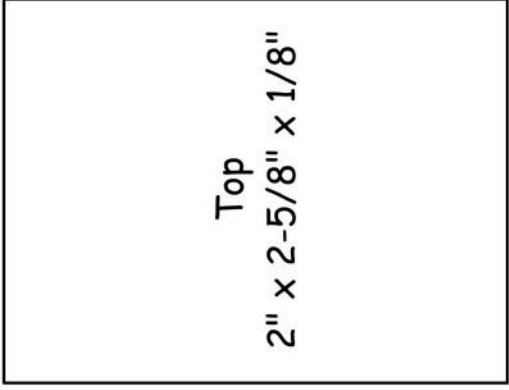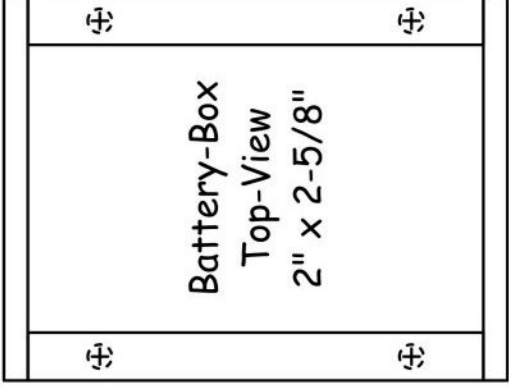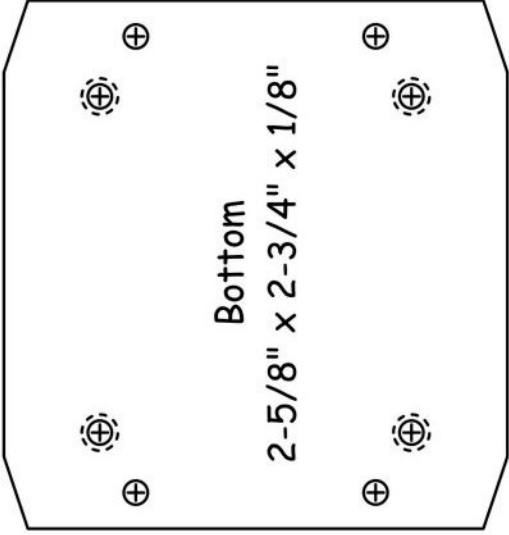

Ends, 1-7/8" x 2" x 1/8" , (2-ea.)

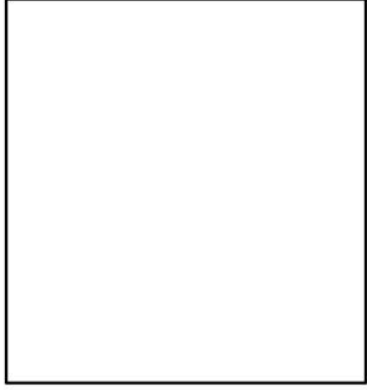


## Battery-Box, B+ Supply, Full-Size




## A+ Supply, Jackets, Full-Size



## Battery-Box, B+ Supply, Jacket Full-Size

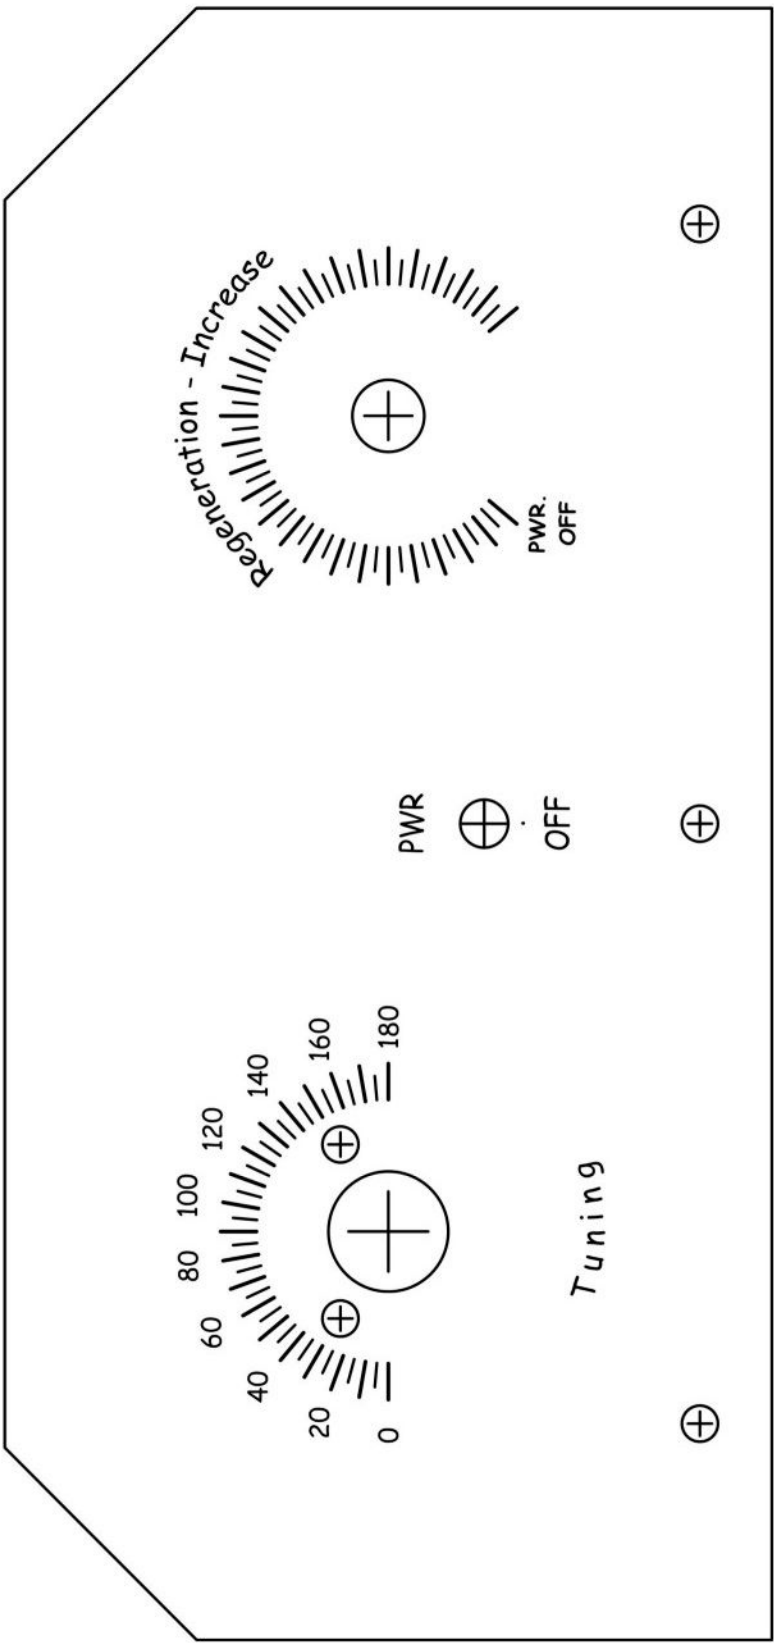

Front-Panel, Full-Size

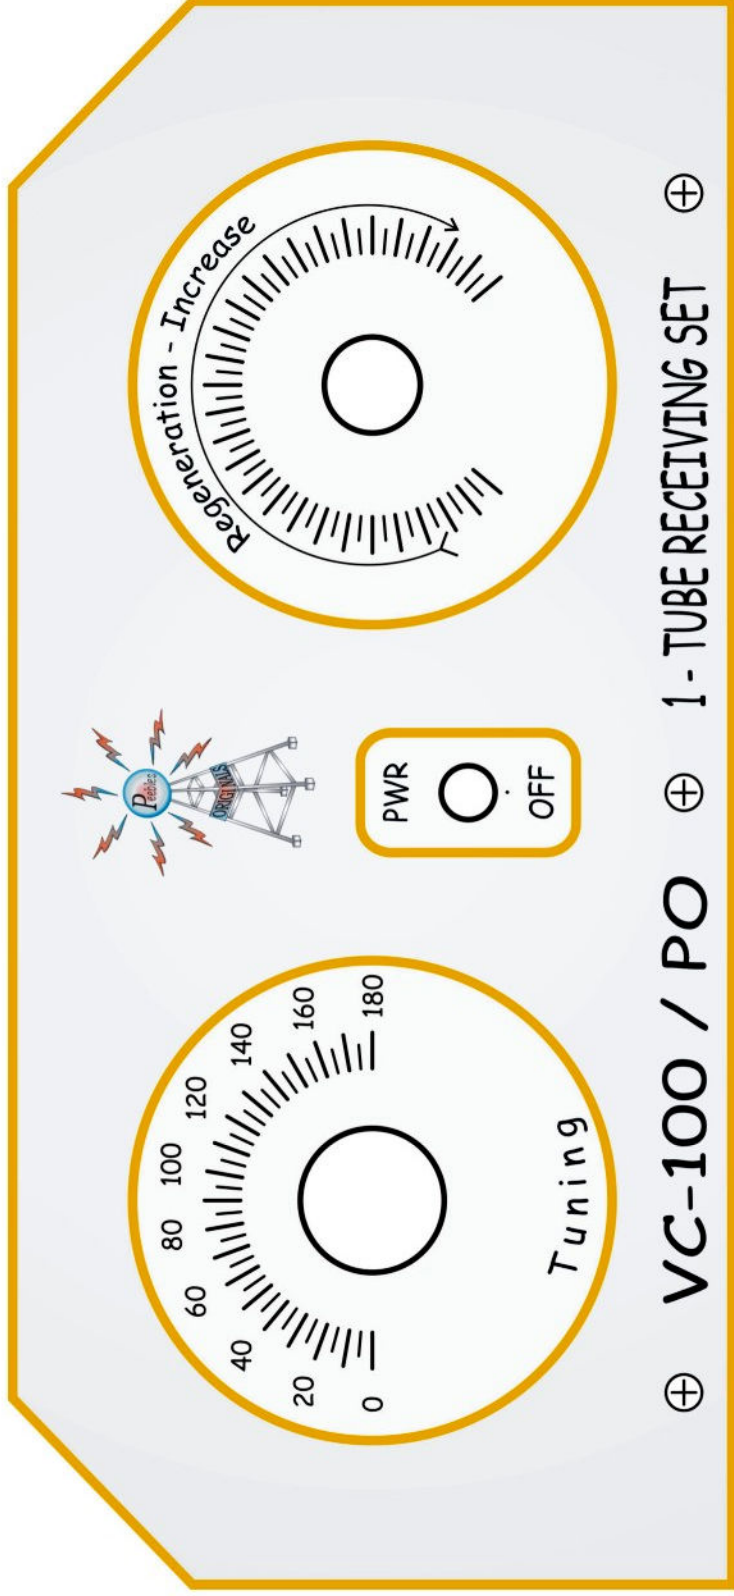

Front-Panel, Dial-Plate, Full-Size

**PO-AC100, 1-Tube Regenerative Kit, Parts List:**

- 1 C-1, 50pf Capacitor, "50"
- 1 C-2, "365" Variable Capacitor
- 2 C-3/4, 100pf Capacitor, "101"
- 2 C-5/6, 0.001uf Capacitor, "102"
- 1 C-7, 0.05uf Capacitor, "503"
- 1 R-1, 2.2M Resistor, "RD/RD/GR/GLD"
- 1 R-2, 50K Linear Potentiometer
- 1 R-3, 22K Resistor, "RD/RD/OR/GLD"
- 1 R-4, 2.2K Resistor, "RD/RD/RD/GLD"
- 1 CH-1, 2.5mHy Choke
- 1 L-1/2 Coil Assy:
  - 1-1/2" x 2-1/2" Coil Form
  - 60', 28ga. Magnet Wire
- 1 SW-1, DPDT Power Switch
- 1 "A" Batt. Holder, 2ea, "C" Batts.
- 1 "B" Batt. Assy.
  - Box, Housing Parts, Plywood, Hdw.
  - 3-9V. Batt. Snaps w/Wires
- 1 V-1, 3Q4 Tube
- 1 V-1, 7-Pin Tube Sockets, Mounting Hdw.
- 2 Knobs
- 4 Fahnstock Clips
- 28 Solder Lugs
- 2 "L" Brackets
- 3 1/4" x 6-32 Mach. Screws.
- 9 3/8" x 6-32 Mach. Screws
- 9 6-32 Hex Nuts
- 18 1/2" x #6 Sheet Metal Screws.
- 1 7-1/2" x 7-1/2" x 1/2 Plywood Base
- 1 4" x 8-1/2" x 1/8" Plywood Front Panel
- 2' Hook-Up Wire